







Features

These Chokes are fitting with high-permeability toroid core (ferrite).

They are mainly used in devices equipped witrh switched-mode power supplies, and in filters designed to prevent both the spread of parasitic noise within the device, and the effects of line noise on the device itself.


Technical Specification


Technical Data:					
Rated Current:	referred to 250VAC 50/60Hz and 60°C ambient temperature				
Rated Inductance:	at +20°C and 10kHz, 0,1mA.				
Inductance tolerance:	.+ 50 -30%				
Inductance loss:	<10% at DC initial loading with IR				
Testing Voltage:	1500V -50Hz, 2 sec, winding to winding				
Climatic category:	DIN GKC (-40°C to +125°C; humidity cat.C).				
DC resistance:	at +20°C				
Derating operating current:	at +120°C ambient temperature I=0				
Overtemperature of windings:	< 55°C				
Max. permissible temperature of windings:	115°C%				
Weight:	16gr.				

The case are of flame-retardent plastic material in accordance with UL 94V-0


The choke are tested in accordance with EN 138100; EN60938-1

Dimensions (vertical mounting)





PinsStart of winding



Standard Version


Rated current per winding	(\)	Rated inductance per winding (DC resistance per winding	
Rated current per winding	(A)	mH)	typical) mΩ	
0,6		47,0	1150	

Potted Current	
Compensated Chokes	

Part No.: **F12039**

Customer:

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	04.07.2009
APPD:	Join			FINISH	Shieh	Sheet	1 from 2










Soldering Profile

Soldering Profile for Lead Soldering

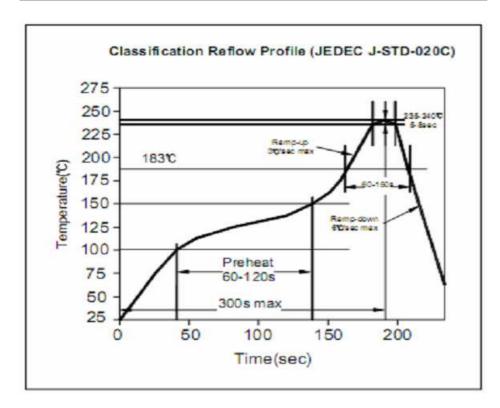

Ordering Information

Serie		Tolerance	ROHS	Packing		
	•					
F12039		0	R	TY		

O = Tolerance	R= ROHS conform	TY= Tray Packing	
	N=NON ROHS		
+30 % ~ -30 %	conform		
•	COLLIGITI		

Potted Current Compensated Chokes

Part No.: **F12039**

Customer:

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	04.07.2009
APPD:	Join			FINISH	Shieh	Sheet	2 from 2