EDCON COMPONENTS
A MEMBER OF EDCON-GROUP

Technical Specification

Features

Ferrite Core
Wire Wound construction
Heat Resistant epoxy molded resin
High reliability Ideal for automatic insertion
Small Size
Tolerance 10% is standard tighter tolerance available

Dimensions

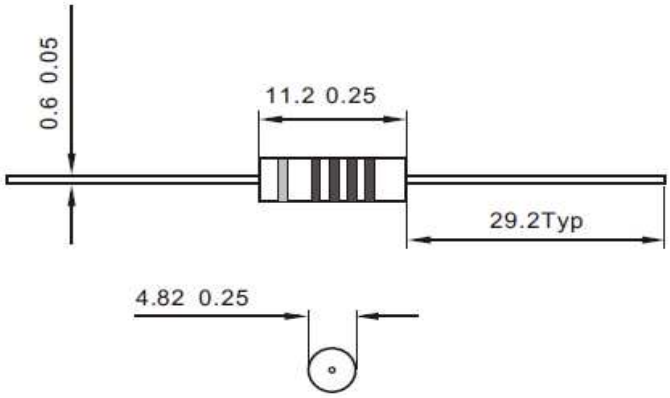

Applications

VCRs, PDP LCD, TV set
Automotive Systms
Computer Peripheral Equipment
GPS, DC/DC Converter,
XDSL Modem
Electronic Games
Mobile Communikations Equipment
General Electronic Applications

Electrical Characteristics

Technical Information

Inductance Testing: HP4284A, HP 4285A equivalent
RDC: Quad Tech 1880 Milliohmmeter
Q-HP4342A
SRF-HP4191A or HP4194A
Rated Current L value drop 10% typ.at Idc against ist initial value.
Temperature rise: 40 Max. Reference ambient temper.
Solderability: 75° of the lead wire shall be covered
SolderingMethods: Wave ; Reflow
Operating Temperature: -25°C ~ +85°C
Storage Temperature: -55°C ~ +105°C
Terminal bending strength: 24,5N min.
Moisture resistance: L/L 10% Q/Q 25%

Inductance	Inductance Code	IDC	DCR max.
68µH	680	0,220A	4,200Ω

	Q min.	L-Test Freq.	SRF
	55	2,5MHz	11MHz

THT AXIAL MOLDED Choke

Part No.: **S10A04**

Customer:

DRW:	James	CHKD	Jim	MATL:	Wim	DATE	05.07.2007
APPD:	Sarah			FINISH	Jeff	Sheet	1 from 2

Copyright by EDCON-COMPONENTS H.Schmitt

www.edcon-components.com email: info@edcon-components.com

EDCON COMPONENTS
A MEMBER OF EDCON-GROUP

Soldering Profile

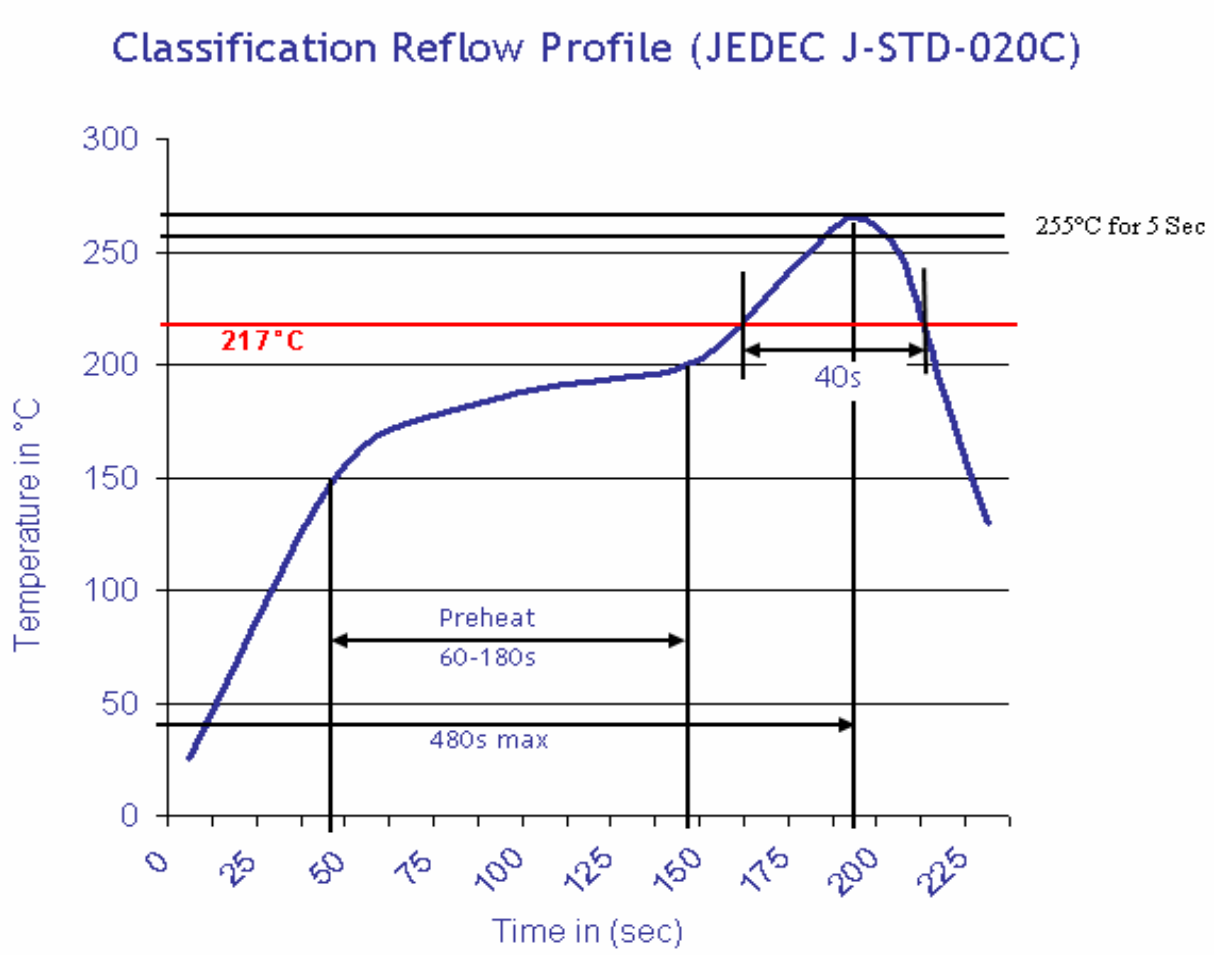

Ordering Information

Serie	Inductance	Tolerance	Function	ROHS	Packing	
S10A04	**680**	**K**	**N**	**R**	**TR**	

680= 68µH	**K=** Tol. 10%	**N=** No function	**R=** ROHS conform	**BU=** Bulk Ware
	J= Tol. 5%		**N=**NON ROHS conform	**TR=** Tape Reel Package

THT AXIAL MOLDED Choke

Part No.: **S10A04**

Customer:

DRW:	James	CHKD	Jim	MATL:	Wim	DATE	05.07.2007
APPD:	Sarah			FINISH	Jeff	Sheet	2 from 2

Copyright by EDCON-COMPONENTS H.Schmitt

www.edcon-components.com email: info@edcon-components.com