




Technical Specification

Features

Wire Wound construction
Polyolefin Shrink Tube
Excellent Environmental Characteristics
High reliability
High Inductance and Lower RDC
Tolerance 10% is standard tighter tolerance available

Dimensions

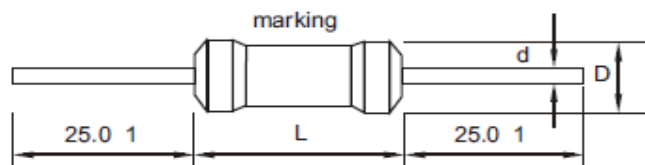

Part-No-	L	D	d
S10A08	17,8	6,6	0,8/+/-0,05

Applications

Power Supplies
SCR and Triac Controls
RFI Suppression
Filters
Switching Regulators

Electrical Characteristics

Technical Information

Inductance Testing: LCR Bridge
[measured @ 1KHz 0,1V HP4284A](#)
RDC: Quad Tech 1880 Milliohm meter
IDC Max. Lowerr inductance by 10%
Operating Temperature: -50°C ~ +125°C
Shrink Tube: Flame retardent UL type VW-1
Marking Inductance and tolerance
Note: All specifications subject to change without notice.

Inductance	Inductance Code	I Sat (max)	IDC (max)
68μH	680	1,500A	0,610A

DCR max.			
0,145Ω			

THT AXIAL UL TUBE POWER CHOKES

Part No.: **S10A08**

Customer:


DRW:	James	CHKD	Jim	MATL:	Wim	DATE	06.08.2008
APPD:	Sarah			FINISH	Jeff	Sheet	1 from 2

Copyright by EDCON-COMPONENTS H.Schmitt



Soldering Profile

Classification Reflow Profile (JEDEC J-STD-020C)

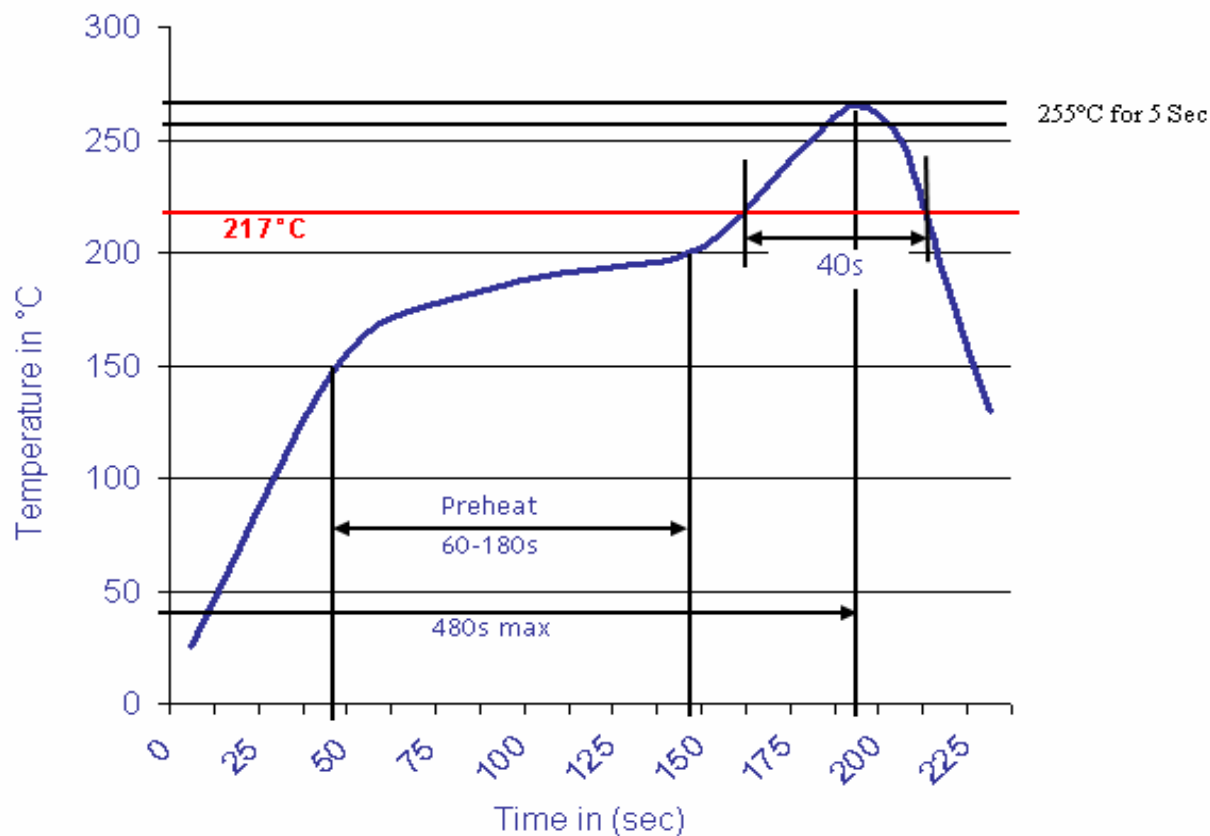

Ordering Information

Serie	Inductance	Tolerance	Function	ROHS	Packing	
S10A08	680	M	N	R	TB	
680= 68μH		M= Tol. 20%	N= No function	R= ROHS conform	BU= Bulk Ware	
		K= Tol. 10%		N=NON ROHS conform	TB= Tape Box Package	

THT AXIAL UL TUBE POWER CHOKES

Part No.: **S10A08**

Customer:

DRW:	James	CHKD	Jim	MATL:	Wim	DATE	06.08.2008
APPD:	Sarah			FINISH	Jeff	Sheet	2 from 2

