

EDCON-COMPONENTS



SPECIFICATIONS : Slide switches are known for providing selection of two or more switch positions for engagement of respective switch contacts. Electrical slide switches have long been used to control the operation of many devices, including volume and other controls for audio & video equipment, dimmer controls for lights among a multitude of other daily electrical products. Such slide switches have also been used for controlling the operating speed of many kinds of variable speed hand tools. In electrical slide switches a slide member is slidably repositionable to affect a switching action.

Contact Material Silver plated Code 1

Fixed Terminal: Silver plated over copper alloy
 Moving Contact: Silver plated over copper alloy
 Contact Rating: 3A with resistive load 120VAX or 28VDC
 1A with resistive load 250VAC

Contact Material Gold plated Code 2




Fixed Terminal: Copper Alloy with gold plated over nickel plated
 Moving Contact: Copper Alloy with gold plated over nickel plated
 Contact Rating: 0,4 Volt-Amps (VA max. @ 20V max.AC or DC

Electrical Specifications and Material

Electrical Life: 20.000 cycles
 Contact Resistance: 50mΩ max. initial
 silver and gold plated contacts.
 Insulation Resistance: 1000M Ω min.
 Dielectric Strength: 1000V RMS min. @ sea level
 Operating Temperature: -40°C to +80°C
 Case: Nylon, White
 Actuator: Nylon, Black
 Housing: Nylon, Black
 Switch Support: Brass, tin plated
 Terminal/Contact: Silver or gold plated

Technical Drawing

P.C. MOUNTING



**Alternative to Siemens /
EPCOS SLIDE-SWITCH**

Part No.: **Q52A3001-**


DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	14.02.2018
APPD:	Schumi			FINISH	Jamy		Sheet No.		1 from 4

Customer:


EDCON-COMPONENTS



Actuator Type 1




Actuator Type 2

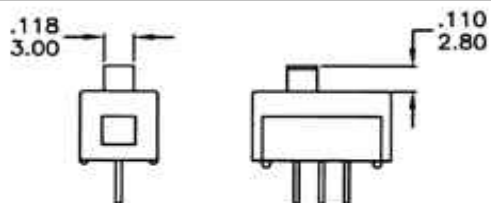


Actuator Type 3


ONLY DPDT

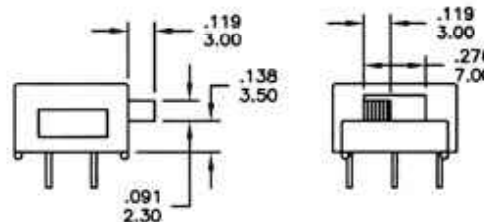


Actuator Type 4

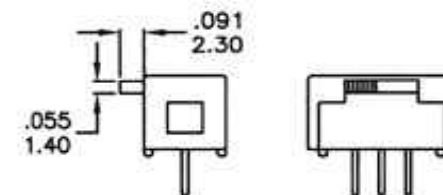


Actuator Type 5

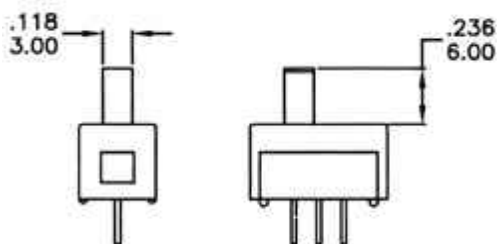

Actuator Type 6

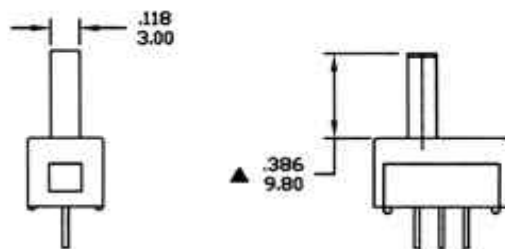


Terminations Options Type 1

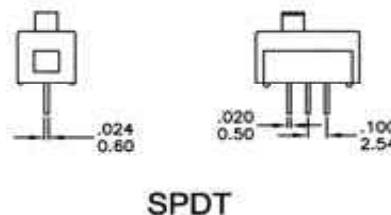


SPDT

Terminations Options Type 2

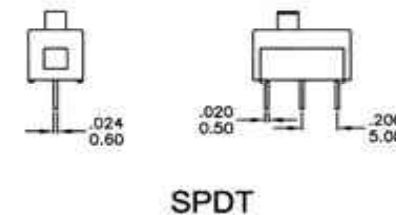


SPDT

Terminations Options Type 3

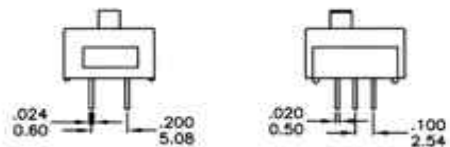

DPDT

Terminations Options Type 4

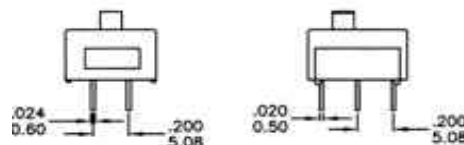

DPDT

Alternative to Siemens / EPCOS SLIDE-SWITCH

Part No.: **Q52A3001-**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	14.02.2018
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 4

EDCON-COMPONENTS



Connected Terminals Cematic

Switch function	Pos.1	Pos2	Pos3	Pos 1	Pos 2	Pos 3
A2	ON	NONE	ON	.2-1	OPEN	.2-3
A3	ON	OFF	ON			

Ordering Informations

Serie	Switch function	ACTUATOR	CONTACT MATERIAL	SEAL	Terminal Options	ROHS	Packing			
Q52A3001-	B	1	1	A	1	R	BU			

B= A2	1= C1	1= Silver	A= Epoxy	1= SPDT 2,54mm	R= Rohs conform	BU= 100PCS per Bag
C= A3	2= C2	2= Gold plated	B= No Epoxy	2= SPDT 5,08mm	N= NON Rohs conform	
	3= C3					
	4= C4					
	5= C5					
	6= C6					

Alternative to Siemens / EPCOS SLIDE-SWITCH

Part No.: **Q52A3001-**


DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	14.02.2018
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 4

Customer:



Lead Free Soldering curve

Classification Reflow Profile (JEDEC J-STD-020C)

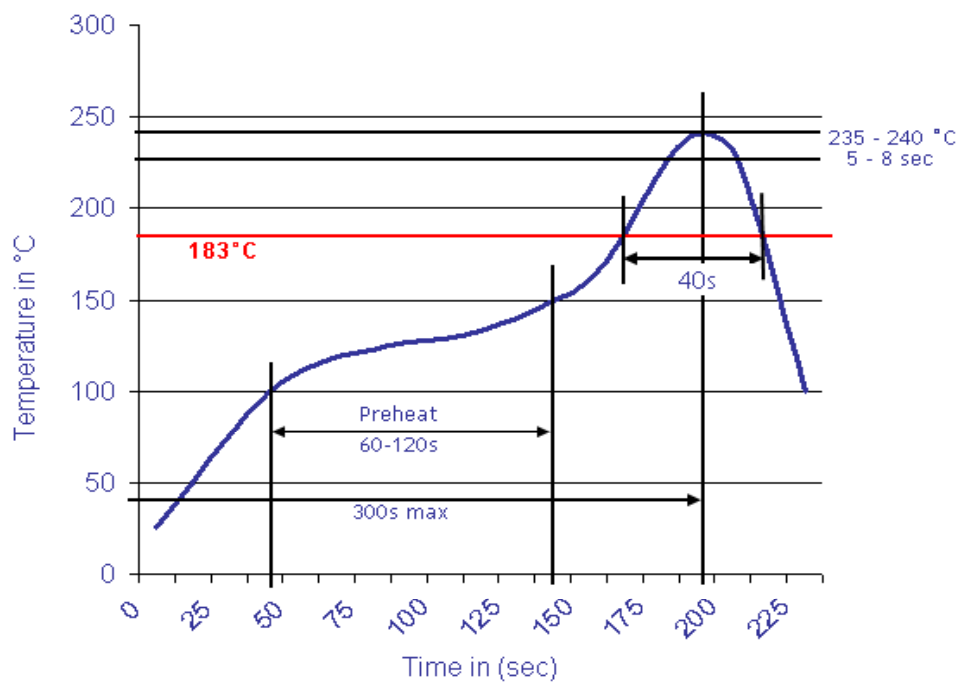

**Alternative to Siemens /
 EPCOS SLIDE-SWITCH**

Part No.: **Q52A3001-**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	14.02.2018
APPD:	Schumi			FINISH	Jamy		Sheet No.	4 from 4	Customer: