


EDCON-COMPONENTS



Specifications

Radial Solid Tantalum Electrolytic Capacitor THT Type
 Rated Voltage from 6,3 ~ 50Volt
 Capacitance Range from 0,1 μ F ~ 470 μ F
 Tolerance 10% or 20%
 Highly reliable resin dipped type
 Excellent frequency and temperature characteristics
 Non flammable epoxy resin

Technical Drawing

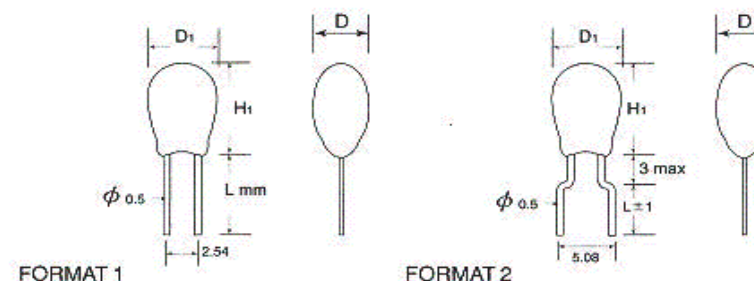

Technical

Performance Characteristics

Operating Temperature Range . -55 to +125°C (-55 to +85° for 4 & 6,3 V)
 Rated Working Voltage Range 6,3 ~ 50 VDC
 Nominal Capacitance Range 0,1 ~ 33 μ F
 Capacitance Tolerance .+/-20% (+/-10% is available) (120Hz +/-20%)
 Leakage Current Not more than 0,008CV (μ A) or 0,5 μ A whichever is greater

| Characteristics at high and low Temperature | Cap. μ F | Capacit. Change (%) | | | DF max. % | | | | DCL max. (μ F) | | |
|---|--------------|---------------------|----------|-----------|-----------|--------|--------|---------|---------------------|---------|---------|
| | | -.50% °C | +.85%° C | +.125% °C | -.50°C | +.20°C | +.85°C | +.125°C | +.20°C | +.85°C | +.125°C |
| ≤ 1.0 | . +10 | . +15 | . +25 | 6 | 4 | 6 | 6 | 10 lo | 10 lo | 12,5 lo | |
| 1,5-68 | | | | 8 | 6 | 8 | 8 | | | | |
| 100-330 | | | | 10 | 8 | 10 | 10 | | | | |

Dimensions (mm)

| Case Size | A | B | C | D | E | F |
|---------------------|-----|-----|-----|-----|------|------|
| Formats 1/2/H1 max. | 7 | 8 | 9,5 | 11 | 13,5 | 16,5 |
| D1 max. | 4,5 | 5,0 | 5,5 | 6,5 | 8,5 | 9,5 |
| D max. | 4,2 | 4,7 | 5,5 | 6,5 | 8,5 | 9,5 |

| | | |
|-----------------|----------|------------|
| Wire length (L) | 5,7 +/-1 | 16,18 +/-1 |
| Code | A | B |


Standard Radial Tantalum Capacitor 10V

Part No.: **I16001**

Customer:

| | | | | | | | | | |
|-------|--------|------|--------|--------|--------|-----------|-----------|------|------------|
| DRW: | Jason | CHKD | Wilson | MATL: | Wilson | TOLERANCE | Mason | DATE | 20.05.2010 |
| APPD: | Schumi | | | FINISH | Jamy | | Sheet No. | | 1 from 5 |

EDCON-COMPONENTS



Moisture Resistance

| | |
|--------------------------------|---|
| Test conditions | |
| Relative humidity | : 90 to 95% without load |
| Ambient Temperature: | : + 40°C |
| Duration: | : 500hours |
| Post test requirements at 20°C | |
| Leakager current | : ≤ 0,012CV or 0,75(µF) wichever is greater |
| Capacitance Change | : +/-10% of initial measured value |
| tan | : ≤ 150% of initial spevified value |

Shelf Life

| | | |
|---------------------|-------------|---------------------------------|
| Test conditions | | Post test requirements at +20°C |
| Duration | :2000 hours | Same limits for "Endurance" |
| Ambient temperature | : +85°C | |
| Applied Voltage | : none | |

Tinned radial leads Ø 0,5min.

Temperature: 260°C

| | |
|---|--|
| Time of immersions: 3s | Time of immersions: 3S |
| Standard lead spacing :2,54/5,08 +/-0,5mm | The tin should cover 95% of wire surface |
| Solderability | Permissible pull test: 10N |
| Recommended soldering bath | |

Endurance

| | | |
|---------------------|------------------------------|-----------------------|
| Test conditions | | |
| Conditions Item | Derating (for 10 to 50V only | Rating |
| Duration | 1000hours | 2000 hours |
| Ambient Temperature | .+105°C | .+ 85°C |
| Applied voltage | Derated working voltage | Rated working voltage |
| Source impedance | 1 Ω/V | 1 Ω/V |

Derating Voltage +125°C for 10~50V working

| | | | | | | | | |
|---------------------|-----|-----|------|------|------|------|------|------|
| Rated Voltage | 4,0 | 6,3 | 10,0 | 16 | 20 | 25 | 35,0 | 50,0 |
| Voltage Derating | 2,5 | 4,0 | 6,3 | 10,0 | 13,0 | 16,0 | 23,0 | 33,0 |
| Surge Voltage +85°C | 5,0 | 8,0 | 13,0 | 20,0 | 26,0 | 32,0 | 36,0 | 65,0 |
| Surge Voltage +0°C | 3,4 | 5,0 | 9,0 | 12,0 | 16,0 | 20,0 | 26,0 | 38,0 |

Post test requirements at +20°C

| | |
|--------------------|---|
| Leakage current | ≤ 0,01% CV or 0,0625 (µA), whichever is greater |
| Capacitance change | .+10% of inital measured value |
| tan | ≤ initial specified value |

Standard Radial Tantalum Capacitor 10V

Part No.: **I16001**




Customer:

| | | | | | | | | | |
|-------|--------|------|--------|--------|--------|-----------|-----------|------|------------|
| DRW: | Jason | CHKD | Wilson | MATL: | Wilson | TOLERANCE | Mason | DATE | 20.05.2010 |
| APPD: | Schumi | | | FINISH | Jamy | | Sheet No. | | 2 from 5 |

EDCON-COMPONENTS



Packing Specification Tape & Ammo Packing (conform to IEC288-2)

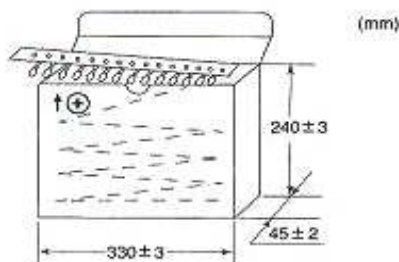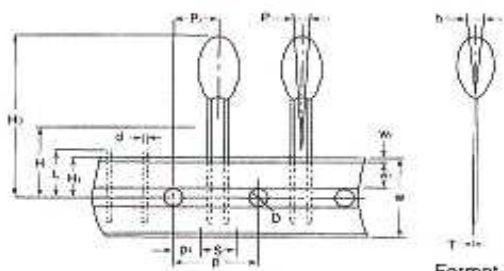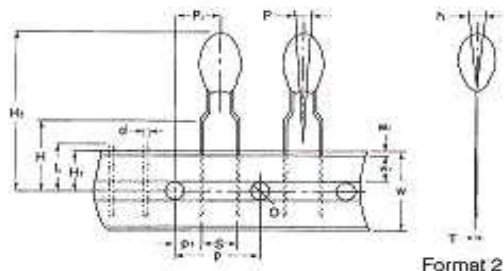

| Item | Code | Dimension (mm) |
|---------------------------------|------------|-----------------------|
| Carrier tape width | W | 18,0 |
| Hold down tape width | W | 6,0 +/-0,5 |
| Hold down tape position | W | 1,0max. |
| Feed hold diameter | D | 4,0 +/-0,2 |
| Feed hole pitch | P | 12,7 +/-0,3 |
| Hold center to lead | P | Format 1: 5,05 +/-0.7 |
| | | Format 2: 3,85 +/-0.7 |
| Hole center to component center | P | 6,35 +/-1.0 |
| Lead wire clench height | H | 16,0 +/-0,5 |
| Hole position | H1 | 9,0 +/-0,5 |
| Base of component height | H | 0,8 min. |
| Component height | H | 32,2max. |
| Components alignment | ΔP | 0 +/-1.3 |
| | Δh | 0 +/-2.0 |
| Lead spacing | S | 'S' wires 2.5 |
| | | 'B' wires 5.0 |
| Lead diameter | d | 0,5 +/-0,05 |
| length of snipping lead | L | 11,0 max. |
| Carrier tape thickness | T | 0,5 +/-0,1 |

| Quantity of Tape Ammo Packing type | | | |
|------------------------------------|------|------|------|
| Case Code | A~B | C~D | E~F |
| QTY (PCS/box) | 2500 | 2000 | 1000 |

| CASE Size FORMAT | Qty per bag (cut ≤7mm) | CASE Size FORMAT | Qty per bag (cut ≤18mm) |
|------------------|------------------------|------------------|-------------------------|
| from A to B | 1000 | from A to B | 1000 |
| from C to D | 1000 | from C to D | 500 |
| from E to F | 500 | from E to F | 500 |

| | |
|---|---------------|
| Standard Radial Tantalum Capacitor 10V | |
| Part No.: | I16001 |
| Customer: | |

| | | | | | | | | | |
|-------|--------|------|--------|--------|--------|-----------|-----------|------|------------|
| DRW: | Jason | CHKD | Wilson | MATL: | Wilson | TOLERANCE | Mason | DATE | 20.05.2010 |
| APPD: | Schumi | | | FINISH | Jamy | | Sheet No. | | 3 from 5 |

EDCON-COMPONENTS



| Capacitance | DCL (µA) max. | DF % max. | ESR max. (Ω) @ 100KHz |
|-------------|---------------|-----------|--------------------------|
| 47µF | 3,7µA | 8% | 1,7Ω |

Ordering Informations

| Serie | Voltage Code | Tol. Code | Range Code | Case Code | Lead function | ROHS | Package | | | |
|---------------|--------------|-----------|------------|-----------|---------------|----------|-----------|--|--|--|
| I16001 | 100 | M | 476 | D | LL | R | BU | | | |

| | | | | | | |
|--------------------|--------------------|------------------|---------------------|------------------------------------|----------------------------|------------------------|
| 100= 10Volt | M= Tol. 20% | 476= 47µF | D= Size Code | LL= Long Lead | R= ROHS Conform | BU= Bulk / Ware |
| | K= Tol. 10% | | | L6= Lead length 5,7 +/- 1mm | N= NON ROHS Conform | TR= Tape / Reel |

Standard Radial Tantalum Capacitor 10V

Part No.: **I16001**

| | | | | | | | | | |
|-------|--------|------|--------|--------|--------|-----------|-----------|------|------------|
| DRW: | Jason | CHKD | Wilson | MATL: | Wilson | TOLERANCE | Mason | DATE | 20.05.2010 |
| APPD: | Schumi | | | FINISH | Jamy | | Sheet No. | | 4 from 5 |

Customer:



Soldering Profile Curve

Classification Reflow Profile (JEDEC J-STD-020C)



| | |
|---|---------------|
| Standard Radial Tantalum Capacitor 10V | |
| Part No.: | I16001 |
| Customer: | |

| | | | | | | | | | |
|-------|--------|------|--------|--------|--------|-----------|-----------|----------|------------|
| DRW: | Jason | CHKD | Wilson | MATL: | Wilson | TOLERANCE | Mason | DATE | 20.05.2010 |
| APPD: | Schumi | | | FINISH | Jamy | | Sheet No. | 5 from 5 | |