


EDCON-COMPONENTS




Technical Discription


Nominal Capacity	120mAh
Nominal Voltage	1,2Volt
Discharge Cut-Off Voltage	1,0Volt
Charge Current Standard	12mA
Charge Current Rapid	120mAh
Charge Time Standard	14~16Hrs
Charge Time Rapid	1,2Hrs
Service Lifetime	> 500 cycles
Ambient Temperature	
Charge Standard	. 0°C ~ +45°C
Charge Rapid	10°C ~ +40°C
Discharge	. -20°C ~ +60°C
Storage	. -20°C ~ +30°C
Internal Impedance After Charge	< 25mΩ

Drawing (mm)

D=	10,5
H=	15,0

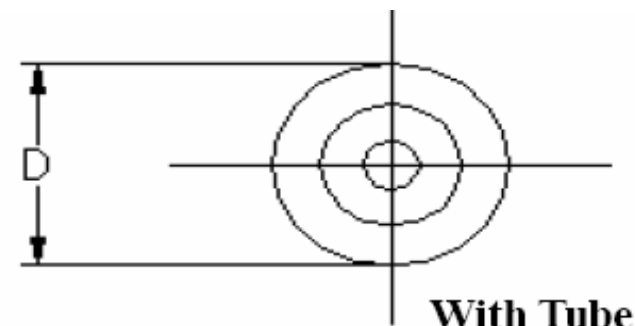

With Tube

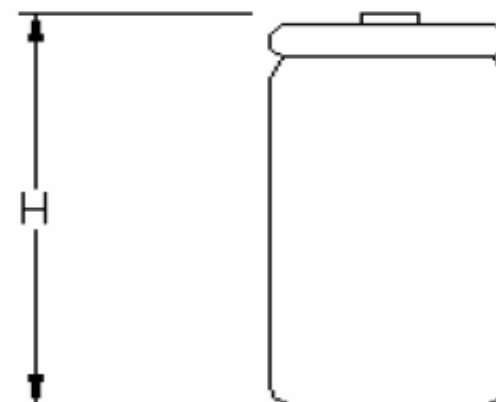





**Rechargeable Nickel Metall
Hybride Cylindrical Cell**

Part No.: **B14004**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	10.08.2008
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 3	

EDCON-COMPONENTS

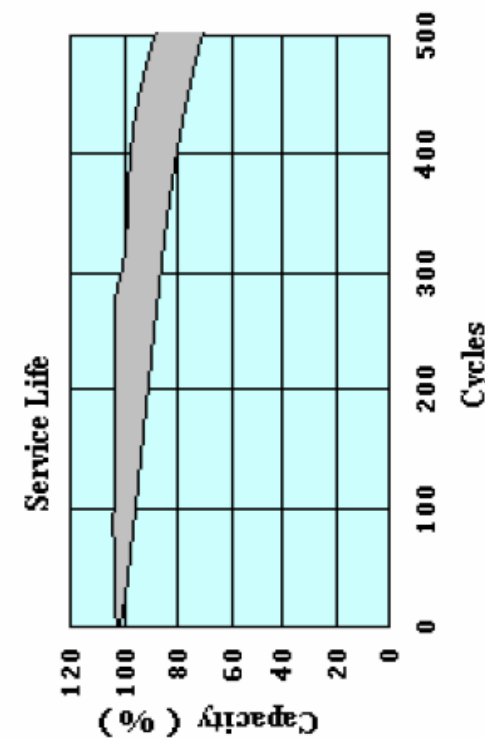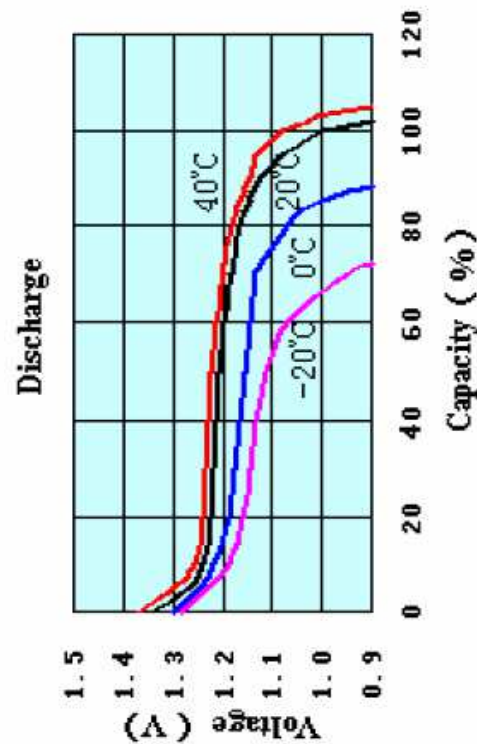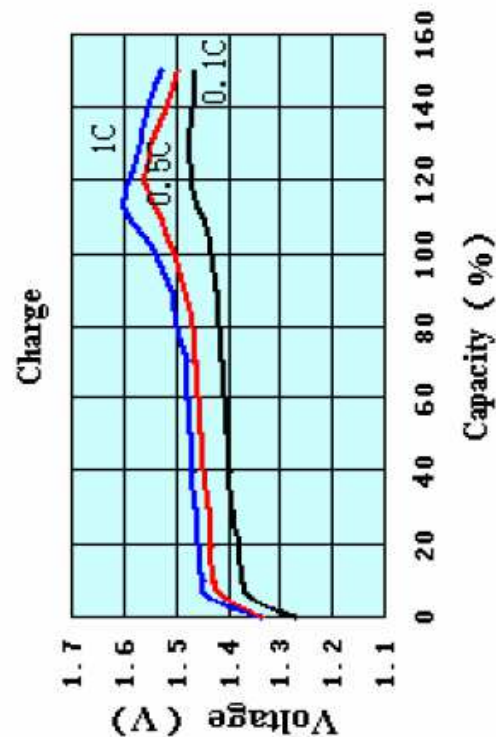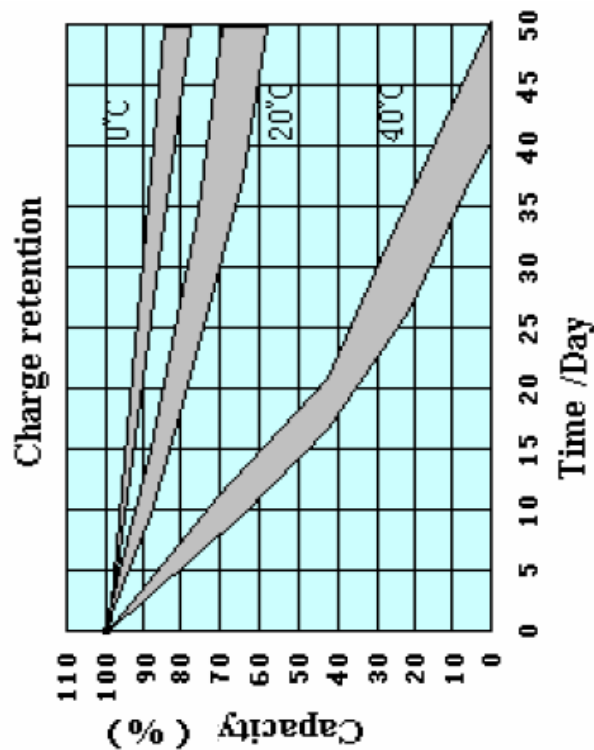


Rechargeable Nickel Metal
Hybride Cylindrical Cell

Part No.: **B14004**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	10.08.2008
APPD:	Schumi			FINISH	Jamy		Sheet No.	2 from 3	Customer:

EDCON-COMPONENTS



Ordering Informations

Serie	Size of Battery	ROHS	Packing	Customer No.	-	Customer type
B14004	1015	R	T			

R = ROHS Conform	T = Tray	When our customer need special item	Sequential number from our customer
N = NON ROHS Conform	I = individual		

Rechargable Nickel Metall Hybride Cylindrical Cell	
Part No.:	B14004
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	10.08.2008
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 3