


# EDCON-COMPONENTS





## Technical Discription

Nominal Capacity	2100mAh
Nominal Voltage	1,2Volt
Discharge Cut-Off Voltage	1,0Volt
Charge Current Standard	210mA
Charge Current Rapid	2100mAh
Charge Time Standard	14~16Hrs
Charge Time Rapid	1,2Hrs
Service Lifetime	> 500 cycles
Ambient Temperature	
Charge Standard	. 0°C ~ +45°C
Charge Rapid	10°C ~ +40°C
Discharge	. -20°C ~ +60°C
Storage	. -20°C ~ +30°C
Internal Impedance After Charge	< 25mΩ

D=	14,5
H=	50,4

## Drawing (mm)

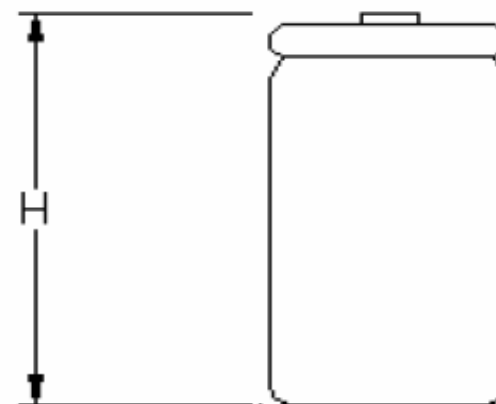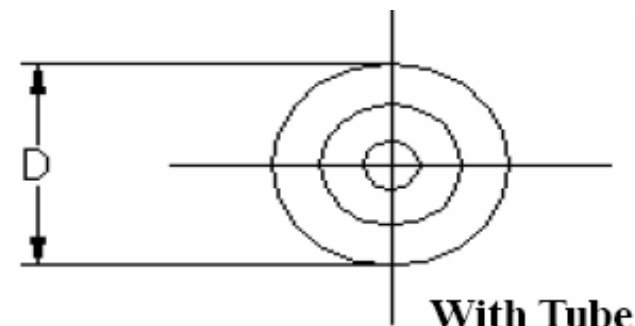





**Rechargeable Nickel Metall  
Hybride Cylindrical Cell**

Part No.: **B14034**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	10.08.2008
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 3	

# EDCON-COMPONENTS

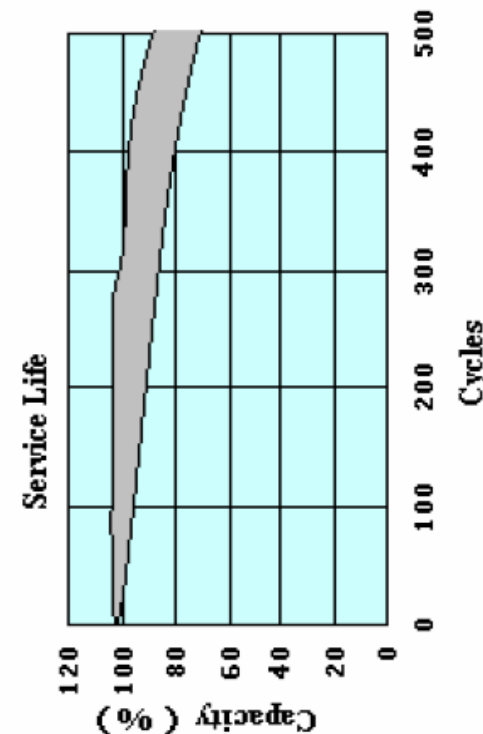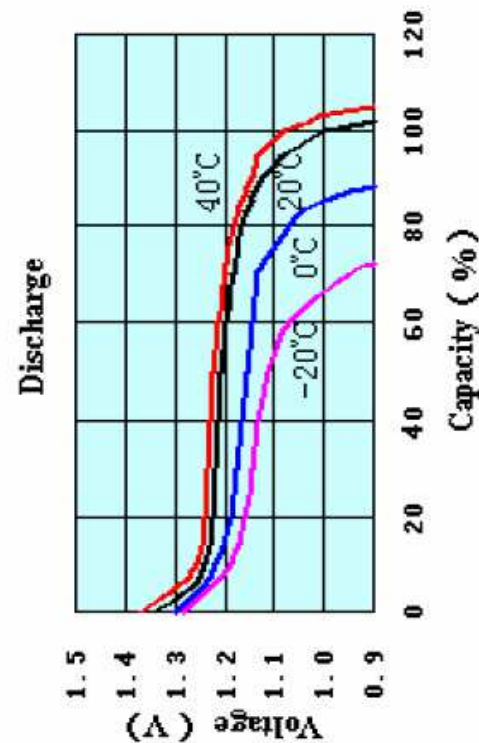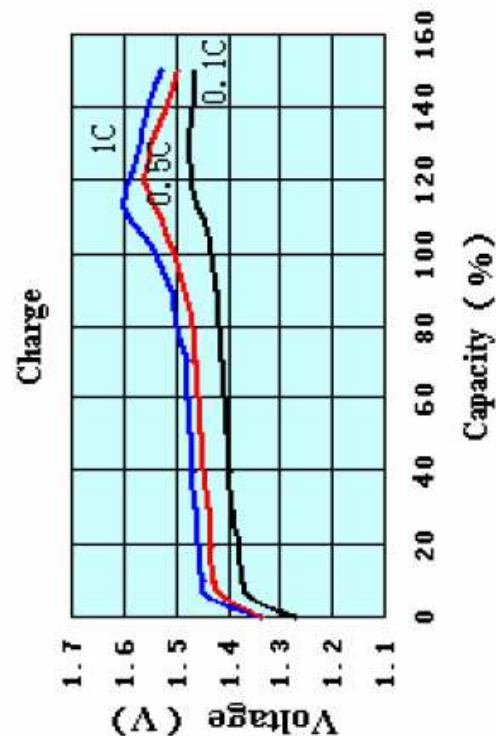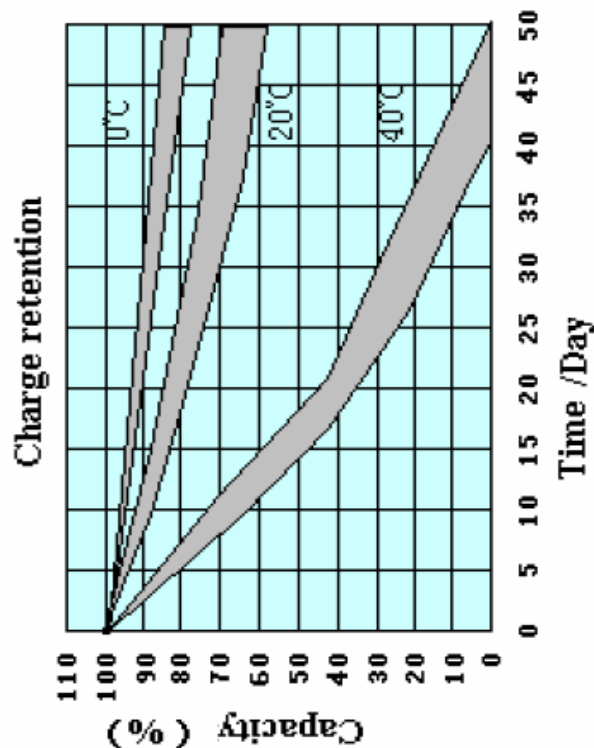


Rechargeable Nickel Metal  
Hybride Cylindrical Cell

Part No.: **B14034**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	10.08.2008
APPD:	Schumi			FINISH	Jamy		Sheet No.	2 from 3	Customer:

# EDCON-COMPONENTS



## Ordering Informations

Serie	Size of Battery	ROHS	Packing	Customer No.	-	Customer type
B14034	1450	R	T			

<b>R</b> = ROHS Conform	<b>T</b> = Tray	When our customer need special item	Sequential number from our customer
<b>N</b> = NON ROHS Conform	<b>I</b> = individual		

<b>Rechargable Nickel Metall Hybride Cylindrical Cell</b>	
Part No.:	<b>B14034</b>
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	10.08.2008
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 3