

EDCON-COMPONENTS





Technical Discription

Nominal Capacity	3600mAh
Nominal Voltage	1,2Volt
Discharge Cut-Off Voltage	1,0Volt
Charge Current Standard	360mA
Charge Current Rapid	3600mAh
Charge Time Standard	14~16Hrs
Charge Time Rapid	1,2Hrs
Service Lifetime	> 500 cycles
Ambient Temperature	
Charge Standard	. 0°C ~ +45°C
Charge Rapid	10°C ~ +40°C
Discharge	. -20°C ~ +60°C
Storage	. -20°C ~ +30°C
Internal Impedance After Charge	< 25mΩ

D=	17,0
H=	67,3

Drawing (mm)

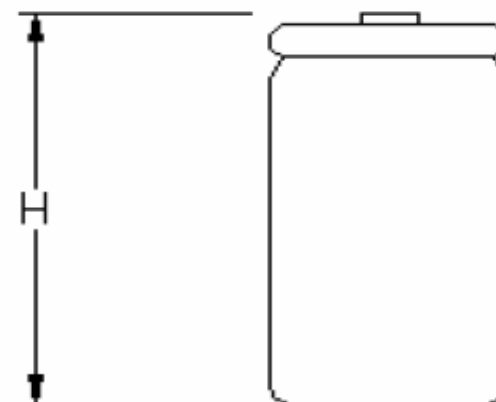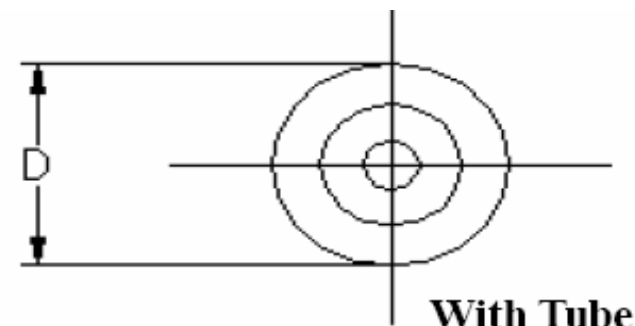





**Rechargeable Nickel Metall
Hybride Cylindrical Cell**

Part No.: **B14045**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	10.08.2008
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 3	

EDCON-COMPONENTS

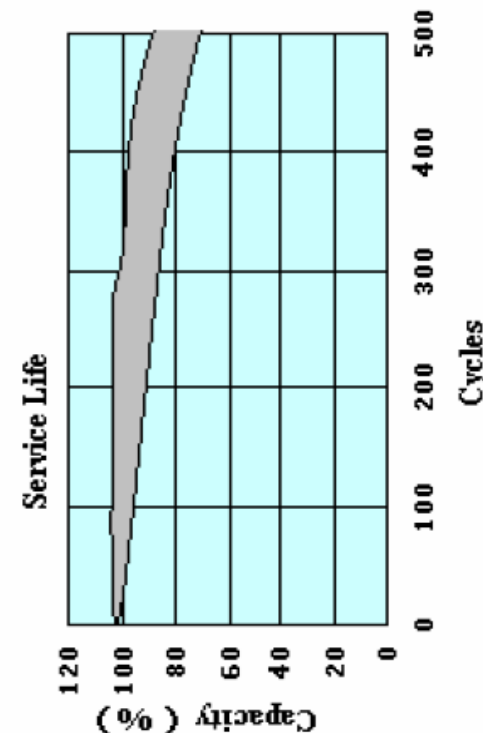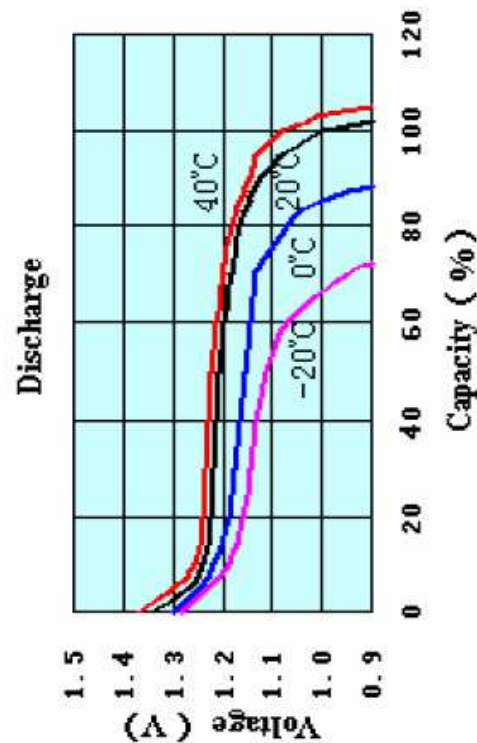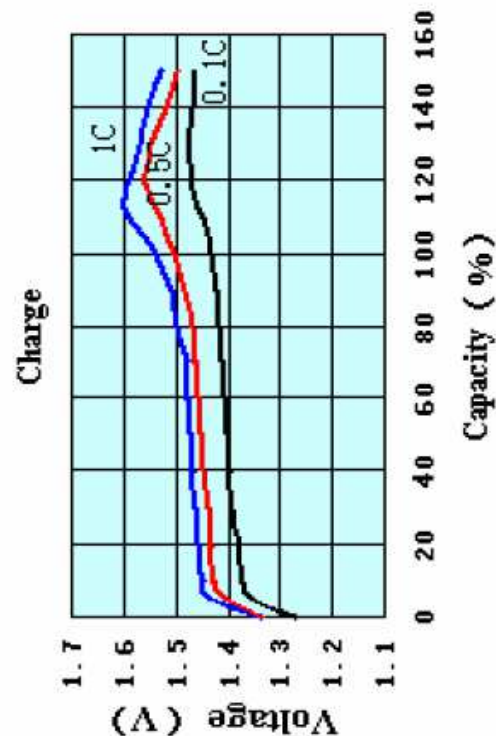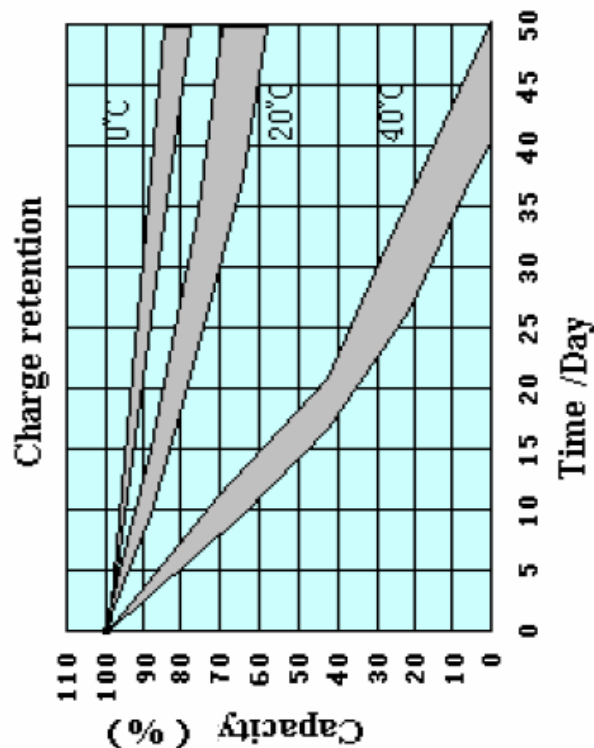

Rechargeable Nickel Metal Hybride Cylindrical Cell	
Part No.:	B14045
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	10.08.2008
APPD:	Schumi			FINISH	Jamy		Sheet No.	2 from 3	

www.edcon-components.com

email: info@edcon-components.com

EDCON-COMPONENTS



Ordering Informations

Serie	Size of Battery	ROHS	Packing	Customer No.	-	Customer type
B14045	1767	R	T			

R= ROHS Conform	T= Tray	When our customer need special item	Sequential number from our customer
N= NON ROHS Conform	I= individual		

Rechargeable Nickel Metall Hybride Cylindrical Cell	
Part No.:	B14045
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	10.08.2008
APPD:	Schumi			FINISH	Jamy		Sheet No.	3 from 3	