

# EDCON-COMPONENTS



## Technical Discription

Nominal Capacity	180mAh
Nominal Voltage	8,4Volt
Discharge Cut-Off Voltage	8,0Volt
Charge Current Standard	18mA
Charge Current Rapid	180mAh
Charge Time Standard	14~16Hrs
Charge Time Rapid	1,2Hrs
Service Lifetime	> 500 cycles
Ambient Temperature	
Charge Standard	. 0°C ~ +45°C
Charge Rapid	10°C ~ +40°C
Discharge	. -20°C ~ +60°C
Storage	. -20°C ~ +30°C
Internal Impedance After Charge	< 25mΩ

## Drawing (mm)

D=	26,5
H=	17,5
W=	48,5





**Rechargeable Nickel Metall  
Hybride Cell**

Part No.: **B14056**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	10.08.2008
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 3	

# EDCON-COMPONENTS

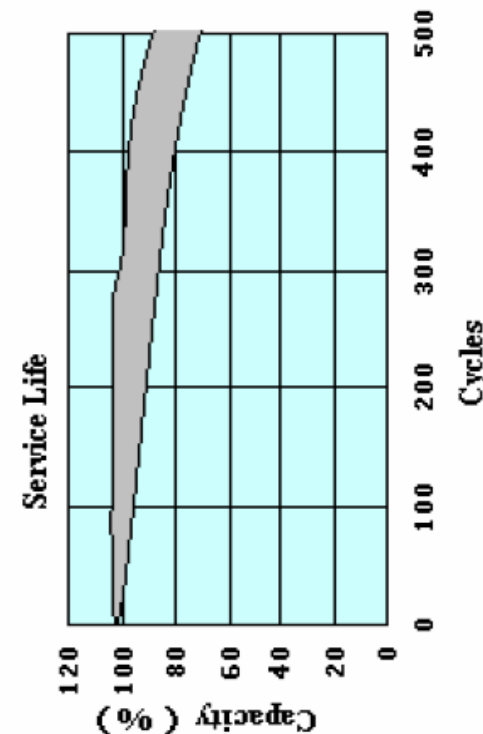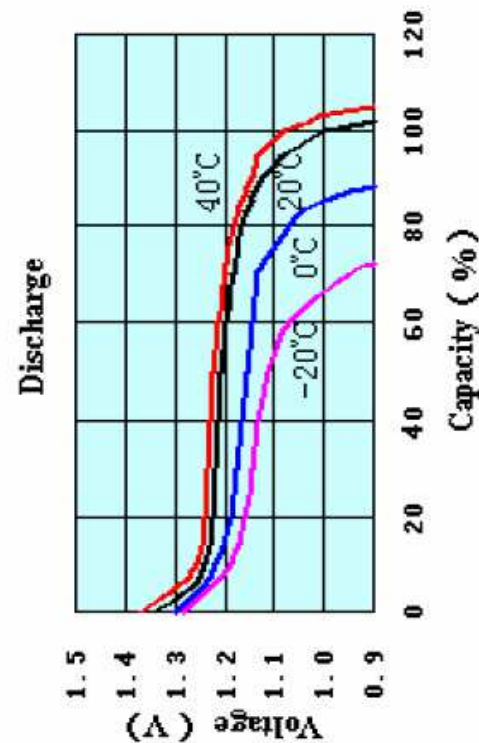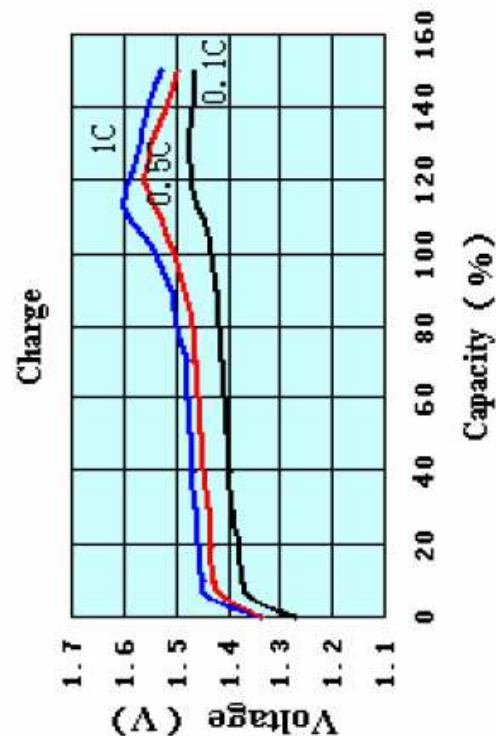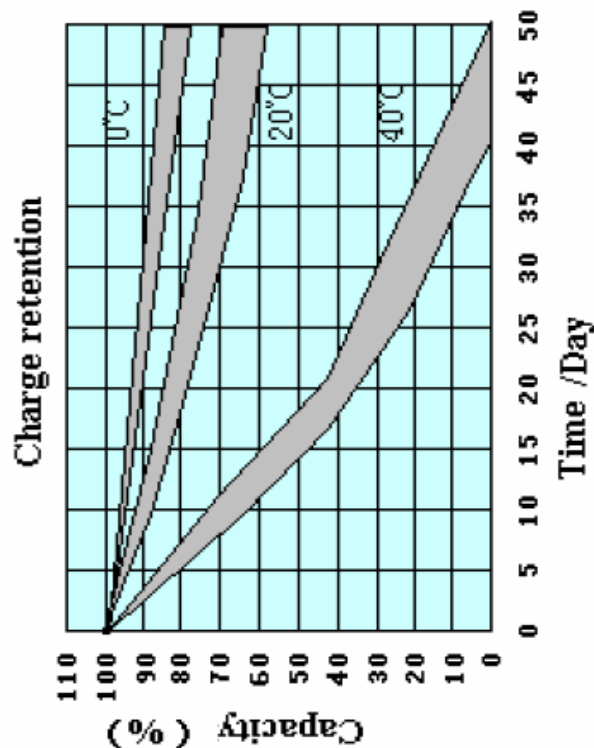

Rechargeable Nickel Metal  
Hybride Cell

Part No.: **B14056**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	10.08.2008
APPD:	Schumi			FINISH	Jamy		Sheet No.	2 from 3	

# EDCON-COMPONENTS



## Ordering Informations

Serie	Size of Battery	ROHS	Packing	Customer No.	-	Customer type
B14056	261748	R	T			

<b>R=</b> ROHS Conform	<b>T=</b> Tray	When our customer need special item	Sequential number from our customer
<b>N=</b> NON ROHS Conform	<b>I=</b> individual		

<b>Rechargable Nickel Metall Hybride Cell</b>	
Part No.:	<b>B14056</b>
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	10.08.2008
APPD:	Schumi			FINISH	Jamy		Sheet No.	3 from 3	