





**Material**



Material: Body Nickel plated  
 Seal: PA6 Sealing NBR  
 Protection Degree: Using suitable O-Sealing within clamping range ist protection degree can reach IP68  
 Properties: Succeed in the experiment of IEC-60077-1999 resistance to vibration and impact  
 Temperature Range: Stat. Min. -40°C max 100°C Short-term 120°C  
 Dynm. Min. -20°C max 80°C Short-term 100°C  
 Note: According to customer demand for custom ROHS trough the joint certification of products

**Technical Drawing**

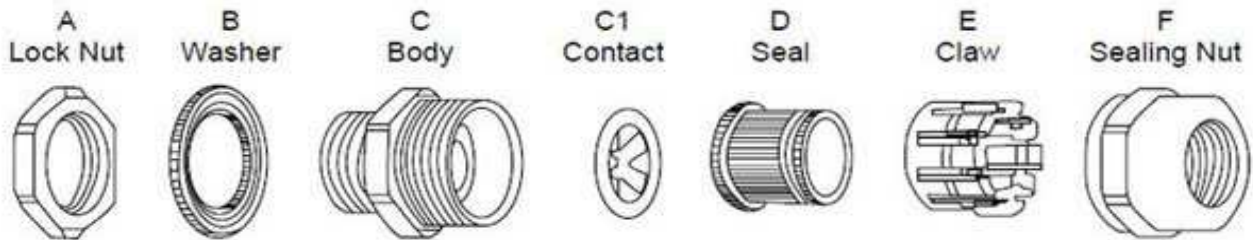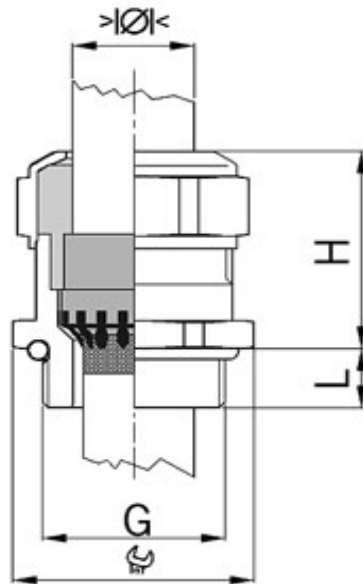

**Electromagnetic Metal  
 Cable Gland M Thread  
 Type 2**

Part No.: **231020**  
 Customer:

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	16.08.2010
APPD:	Join			FINISH	Shieh	Sheet	1 from 2



**Dimension Table**

Size	Thread Dimension	Clamping Range (mm)	Thread AG (mm)	Thread Length (mm)	Wrench Size (mm)	Packing units
M12A	M12x1,5	3 ~ 6,5	12	5	14	100
M16A	M16x1,5	5 ~ 9	16	7	17	100
M20A	M20x1,5	6 ~ 13	20	8	22	50
M25A	M25x1,5	11 ~ 16	25	10	27	50
M32A	M32x1,5	14 ~ 21	32	11	34	25
M40A	M40x1,5	19 ~ 27	40	12	43	25
M50A	M50x1,5	22 ~ 32	50	13	55	10
M63A	M63x1,5	34 ~ 44	63	14	68	12

**Ordering Information**

Serie	Size	ROHS	Packing		
<b>231020</b>	<b>M12A</b>	<b>R</b>	<b>B05</b>		

Look dimension table	<b>R= ROHS Conform</b>	<b>B05= 50PCS</b> in one Poly Bag look Packing units
	<b>0= NON ROHS</b>	

<b>Electromagnetic Metal Cable Gland M Thread Type 2</b>	
Part No.:	<b>231020</b>
Customer:	

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	16.08.2010
APPD:	Join			FINISH	Shieh	Sheet	2 from 2