

EDCON-COMPONENTS




Technical Discription

Material: Nylon 66 UL94 V-0
 No. of Positions: 1x2 ~ 1x08Pos.
 Type of Housing: Plug
 Current Rating: 1A AC/DC
 Voltage Rating: 125V AC/DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: Initial Value/20mΩ max.
 After environmental testing: 20mΩ max.
 Insulation Resistance: 500MΩ min.
 Withstanding Voltage: 500V AC/minute
 Applicable Wire: AWG28~26

Item-No.		Dimension (mm)	
		A	B
T70A004-02	2Pos.	7,75	1,25
T70A004-03	3Pos.	9,00	2,50
T70A004-04	4Pos.	10,25	3,75
T70A004-05	5Pos.	11,50	5,00
T70A004-06	6Pos.	12,75	6,25
T70A004-07	7Pos.	14,00	7,50
T70A004-08	8Pos.	15,25	8,75

Drawing

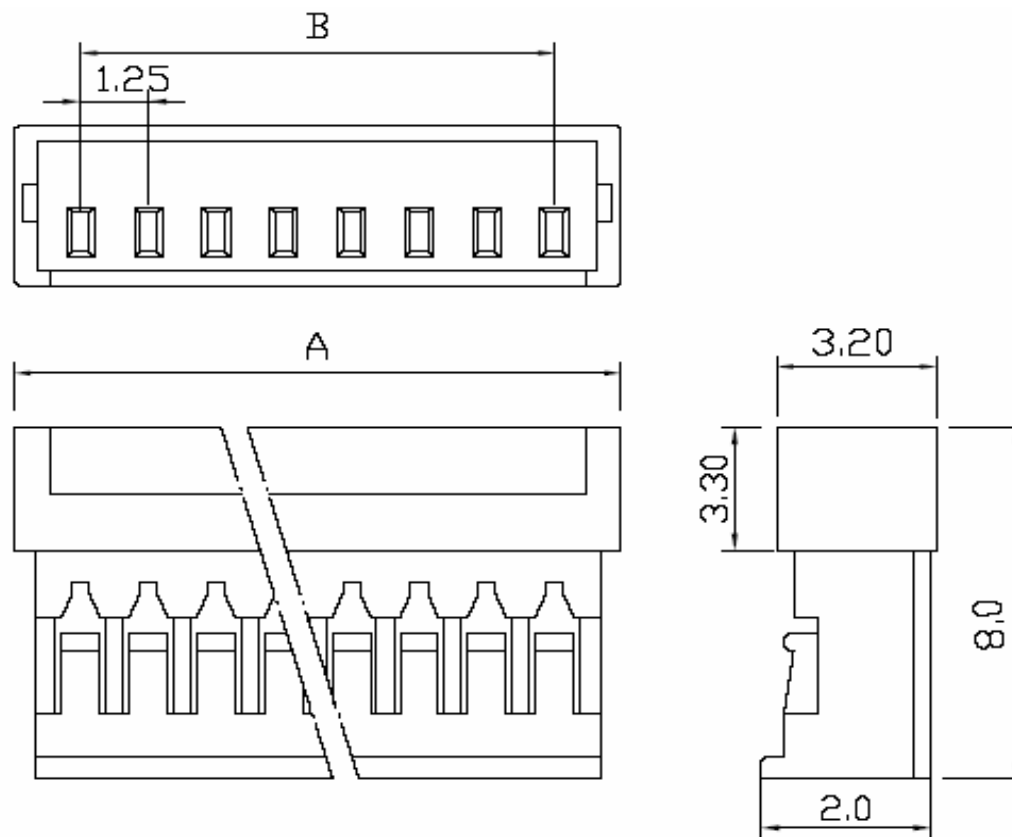

Wire to Wire Connector
Pitch 1,25mm
 Part No.: **T70A004**
 Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	30.10.2010
APPD:	Schumi			FINISH	Jamy		Sheet No.		1 from 2

EDCON-COMPONENTS



Ordering Informations

Serie	No. of Pos.	ROHS	Packing			
T70A004	02	R	BU			

02= 2Pos. / 02~08Pos.	R= ROHS Conform	BU= Bulk- Ware
	N= NON ROHS Conform	

Wire to Wire Connector Pitch 1,25mm	
Part No.:	T70A004
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	30.10.2010
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 2