




EDCON-COMPONENTS




Discription Terminal

| | |
|-----------------------------|----------------------------|
| Material: | Brass tin-plated |
| Thickness: | 0,20mm |
| Wire Range: | AWG22~26 |
| Insulation O.D.: | 1,70mm max. |
| Quantity of Reel: | 7000PCS |
| Current Rating: | 3A AC/DC |
| Voltage Rating: | 250 VAC/DC |
| Temperature Range: | -25°C ~ +85°C |
| Contact Resistance: | Initinal Value / 10mΩ max. |
| After environmental Testing | 20mΩ max. |
| Insulation Resistance: | 500MΩ min. |
| Withstanding Voltage: | 1000VAC / minute |
| Contact Plating | Tin or Gold plating |

Drawing (mm)

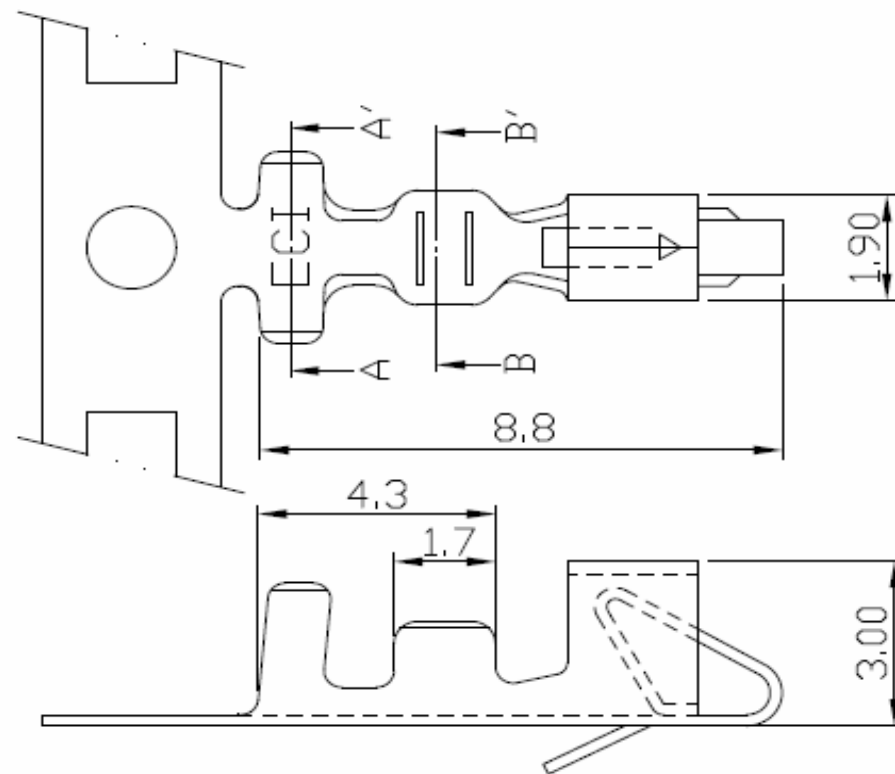

Section A-A'



Section B-B'


**Female Terminal for
2,50mm Housing**

Part No.:

Customer:

| | | | | | | | | | |
|-------|--------|------|--------|--------|--------|-----------|-----------|------|------------|
| DRW: | Jason | CHKD | Wilson | MATL: | Wilson | TOLERANCE | Mason | DATE | 30.10.2010 |
| APPD: | Schumi | | | FINISH | Jamy | | Sheet No. | | 1 from 2 |

EDCON-COMPONENTS



Ordering Informations

Terminal

| Serie | Wire Size | Contact Plating | ROHS | Packing | | |
|-------|-----------|-----------------|------|---------|--|--|
|-------|-----------|-----------------|------|---------|--|--|

| | | | | | | |
|---------|---|----|---|----|--|--|
| T70D001 | A | TN | R | TR | | |
|---------|---|----|---|----|--|--|

| | | | |
|-------------------------|----------------------------|-----------------------------------|----------------------------|
| A = AWG 22~26 | TN = Tin plating | R = ROHS Conform | TR = Tape / Reel |
| | | N = NON ROHS Conform | |

**Female Terminal for
2,50mm Housing**

Part No.: **T70D001**

| | | | | | | | | | |
|-------|--------|------|--------|--------|--------|-----------|-----------|------|------------|
| DRW: | Jason | CHKD | Wilson | MATL: | Wilson | TOLERANCE | Mason | DATE | 30.10.2010 |
| APPD: | Schumi | | | FINISH | Jamy | | Sheet No. | | 2 from 2 |

Customer: