


# EDCON-COMPONENTS



## Technical Description

**Material:** Nylon 66 UL94 V-0  
**No. of Positions:** 1x2 ~ 1x20Pos.  
**Type of Housing:** Receptacle  
**Current Rating:** 3A AC/DC  
**Voltage Rating:** 250V AC/DC  
**Temperature Range:** -25°C ~ +85°C  
**Contact Resistance:** Initial Value/10mΩ max.  
**After environmental testing:** 20mΩ max.  
**Insulation Resistance:** 500MΩ min.  
**Withstanding Voltage:** 1500V AC/minute  
**Applicable Wire:** AWG18~22

## Drawing

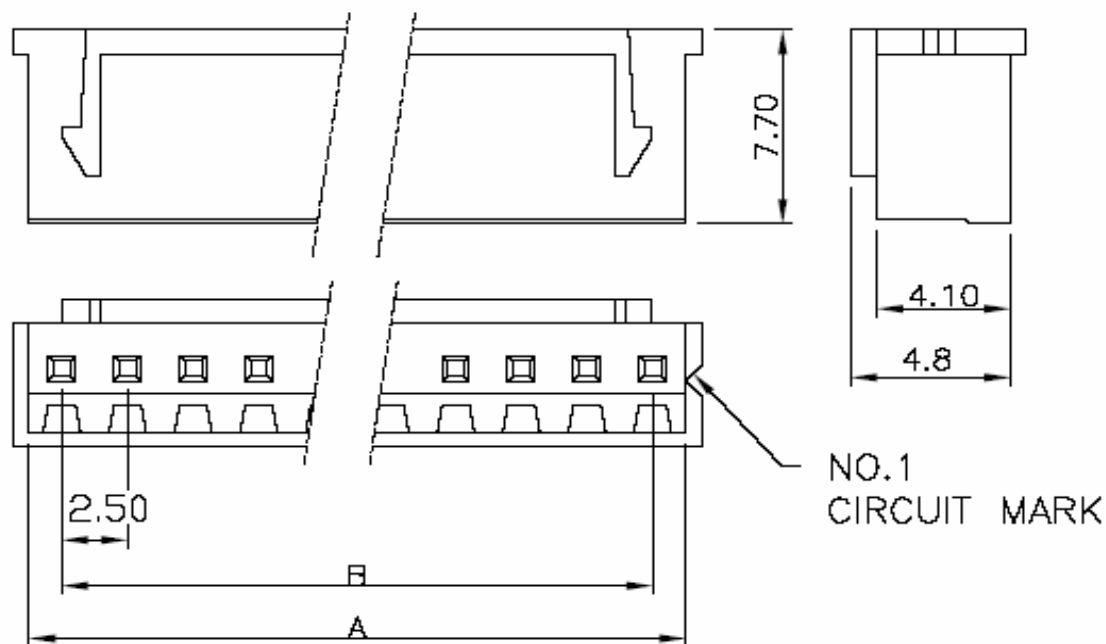

Item-No.		Dimension (mm)	
		A	B
T70D014-02	2Pos.	5,70	2,50
T70D014-03	3Pos.	8,20	5,00
T70D014-04	4Pos.	10,70	7,50
T70D014-05	5Pos.	13,20	10,00
T70D014-06	6Pos.	15,70	12,50
T70D014-07	7Pos.	18,20	15,00
T70D014-08	8Pos.	20,70	17,50
T70D014-09	9Pos.	23,20	20,00
T70D014-10	10Pos.	25,70	22,50
T70D014-11	11Pos.	28,20	25,00
T70D014-12	12Pos.	30,70	27,50
T70D014-13	13Pos.	33,20	30,00
T70D014-14	14Pos.	35,70	32,50
T70D014-15	15Pos.	38,20	35,00

Item-No.		Dimension (mm)	
		A	B
T70D014-16	16Pos.	40,70	37,50
T70D014-17	17Pos.	43,20	40,00
T70D014-18	18Pos.	45,70	42,50
T70D014-19	19Pos.	48,20	45,00
T70D014-20	20Pos.	50,70	47,50

<b>Wire to Wire Connector</b>	
<b>Pitch 2,50mm</b>	
Part No.:	<b>T70D014</b>
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	30.10.2010
APPD:	Schumi			FINISH	Jamy		Sheet No.		1 from 2

# EDCON-COMPONENTS



## Ordering Informations

Serie	No. of Pos.	ROHS	Packing			
T70D014	02	R	BU			

02= 2Pos. / 02~20Pos.	R= ROHS Conform	BU= Bulk- Ware
	N= NON ROHS Conform	

<b>Wire to Wire Connector Pitch 2,50mm</b>	
Part No.:	<b>T70D014</b>
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	30.10.2010
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 2