



EDCON-COMPONENTS



Technical Discription

Material: Nylon 66 UL94 V-0
No. of Positions: 1x2 ~ 1x20Pos.
Type of Housing: Plug
Current Rating: 3A AC/DC
Voltage Rating: 250V AC/DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: Initial Value/10mΩ max.
After environmental testing: 20mΩ max.
Insulation Resistance: 500MΩ min.
Withstanding Voltage: 1500V AC/minute
Applicable Wire: AWG18~22

Drawing

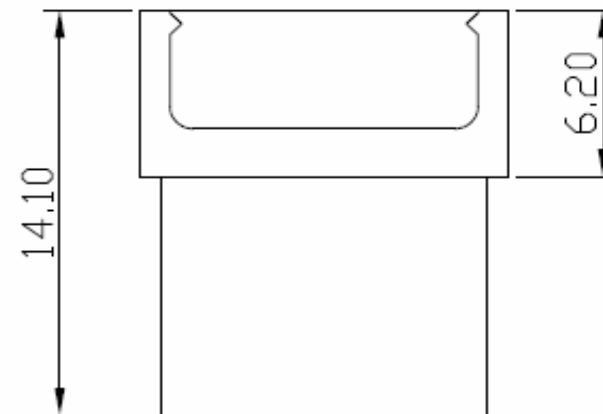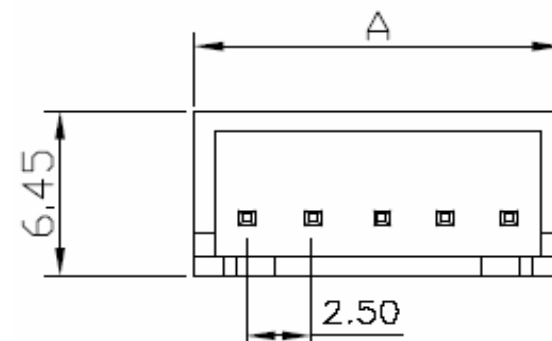

Item-No.		Dimension (mm)	
		A	B
T70D015-02	2Pos.	7,50	2,50
T70D015-03	3Pos.	10,00	5,00
T70D015-04	4Pos.	12,50	7,50
T70D015-05	5Pos.	15,00	10,00
T70D015-06	6Pos.	17,50	12,50
T70D015-07	7Pos.	20,00	15,00
T70D015-08	8Pos.	22,50	17,50
T70D015-09	9Pos.	25,00	20,00
T70D015-10	10Pos.	27,50	22,50
T70D015-11	11Pos.	30,00	25,00
T70D015-12	12Pos.	32,50	27,50
T70D015-13	13Pos.	35,00	30,00
T70D015-14	14Pos.	37,50	32,50
T70D015-15	15Pos.	40,00	35,00

Item-No.		Dimension (mm)	
		A	B
T70D015-16	16Pos.	42,50	37,50
T70D015-17	17Pos.	45,00	40,00
T70D015-18	18Pos.	47,50	42,50
T70D015-19	19Pos.	50,00	45,00
T70D015-20	20Pos.	52,50	47,50

Wire to Wire Connector
Pitch 2,50mm
 Part No.: **T70D015**
 Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	30.10.2010
APPD:	Schumi			FINISH	Jamy		Sheet No.		1 from 2

EDCON-COMPONENTS



Ordering Informations

Serie	No. of Pos.	ROHS	Packing			
T70D015	02	R	BU			

02= 2Pos. / 02~20Pos.	R= ROHS Conform	BU= Bulk- Ware
	N= NON ROHS Conform	

Wire to Wire Connector Pitch 2,50mm	
Part No.:	T70D015
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	30.10.2010
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 2