



EDCON-COMPONENTS



Technical Discription

Material: Noryl 94V-0
 No. of Positions: 2 ~ 25Pos.
 Type of Housing: Male
 Current Rating: 3A AC/DC
 Voltage Rating: 250V AC/DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: Initial Value/10mΩ max.
 After environmental testing: 20mΩ max.
 Insulation Resistance: 500MΩ min.
 Withstanding Voltage: 1500V AC/minute
 Applicable Wire: AWG24~28

Drawing

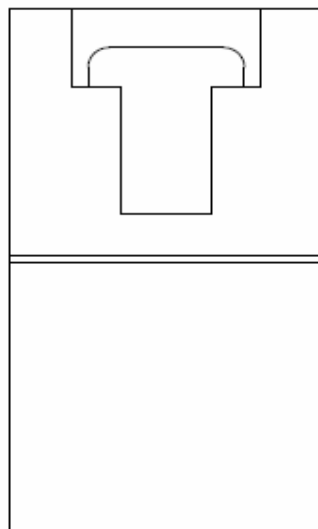

No. of Pos.	A	B
2	7,12	2,54
3	9,66	5,08
4	12,20	7,62
5	14,74	10,16
6	17,28	12,70
7	19,82	15,25
8	22,36	17,78
9	24,90	20,32
10	27,44	22,86
11	29,98	25,40
12	32,52	27,94
13	35,06	30,48
14	37,60	33,02
15	40,14	35,56
16	42,68	38,10
17	45,22	40,64
18	47,76	43,18
19	50,30	45,72
20	52,84	48,26
21	55,38	50,80
22	57,92	53,34
23	60,46	55,88
24	63,00	58,42
25	65,64	60,96

**Wire to Wire Connector
Pitch 2,54mm**

Part No.: **T70E003**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	30.10.2010
APPD:	Schumi			FINISH	Jamy		Sheet No.		1 from 2

Customer:

EDCON-COMPONENTS



Ordering Informations

Serie	No. Of Pos.	ROHS	Packing			
T70E003	02	R	BU			

02 = 2Pos. Look table no. Of. Pos.	R = ROHS Conform	BU = Bulk- Ware
	N = NON ROHS Conform	

Wire to Wire Connector Pitch 2,54mm	
Part No.:	T70E003
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	30.10.2010
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 2