




EDCON-COMPONENTS



Technical Discription

Material: Noryl 94V-0
No. of Positions: 2 ~ 25Pos.
Type of Housing: Female
Current Rating: 3A AC/DC
Voltage Rating: 250V AC/DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: Initial Value/10mΩ max.
After environmental testing: 20mΩ max.
Insulation Resistance: 500MΩ min.
Withstanding Voltage: 1500V AC/minute
Applicable Wire: AWG24~28

Drawing

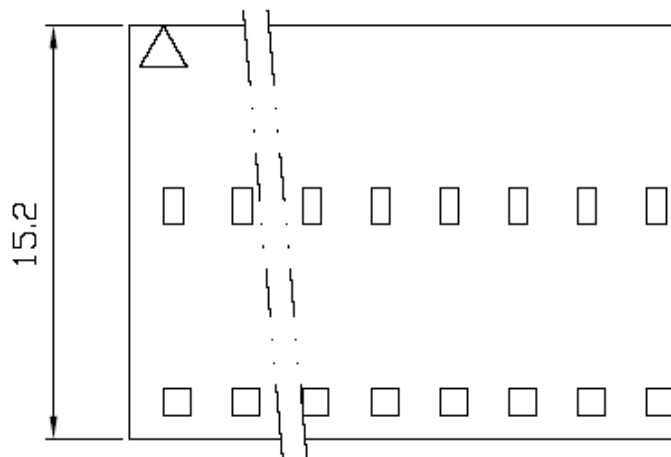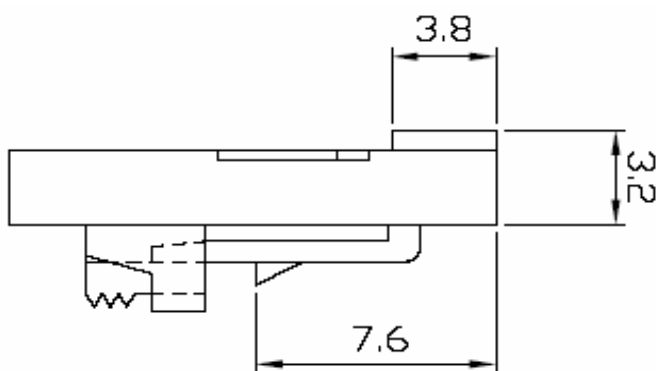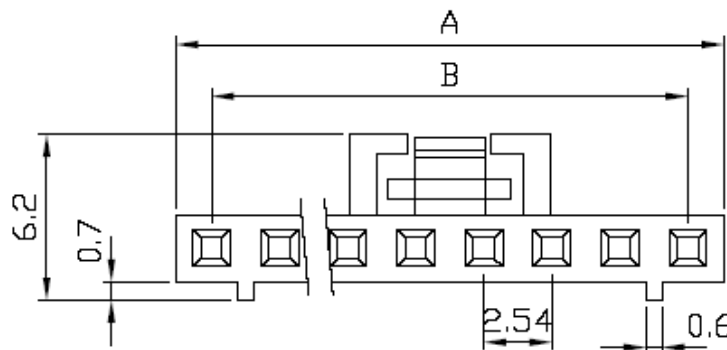

No. of Pos.	A	B
2	5,05	2,54
3	7,59	5,08
4	10,13	7,62
5	12,67	10,16
6	15,21	12,70
7	17,75	15,24
8	20,29	17,77
9	22,83	20,32
10	25,37	22,86
11	27,91	25,40
12	30,45	27,94
13	32,99	30,48
14	35,53	33,02
15	38,07	35,56
16	40,61	38,10
17	43,15	40,64
18	45,69	43,18
19	48,23	45,72
20	50,77	48,26
21	53,31	50,80
22	55,85	53,34
23	58,39	55,88
24	60,93	58,42
25	63,47	60,96

**Wire to Wire Connector
Pitch 2,54mm**

Part No.: **T70E004**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	30.10.2010
APPD:	Schumi			FINISH	Jamy		Sheet No.		1 from 2

Customer:

EDCON-COMPONENTS



Ordering Informations

Serie	No. Of Pos.	ROHS	Packing			
T70E004	02	R	BU			

02 = 2Pos. Look table no. Of. Pos.	R = ROHS Conform	BU = Bulk- Ware
	N = NON ROHS Conform	

Wire to Wire Connector Pitch 2,54mm	
Part No.:	T70E004
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	30.10.2010
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 2