



# EDCON-COMPONENTS



## Technical Discription

**Material:** Nylon 66 UL94V-0  
**Number of Position:** 1x3Pos.  
**Key-Code:**  
  
**Current Rating:** 3A AC/DC  
**Voltage Rating:** 250 VAC/DC  
**Temperature Range:** . -25°C ~ +85°C  
**Contact Resistance:** Initinal Value / 10mΩ max.  
**After environmental Testing:** 20mΩ max.  
**Insulation Resistance:** 500MΩ min.  
**Withstanding Voltage:** 1000VAC / minute

## Drawing

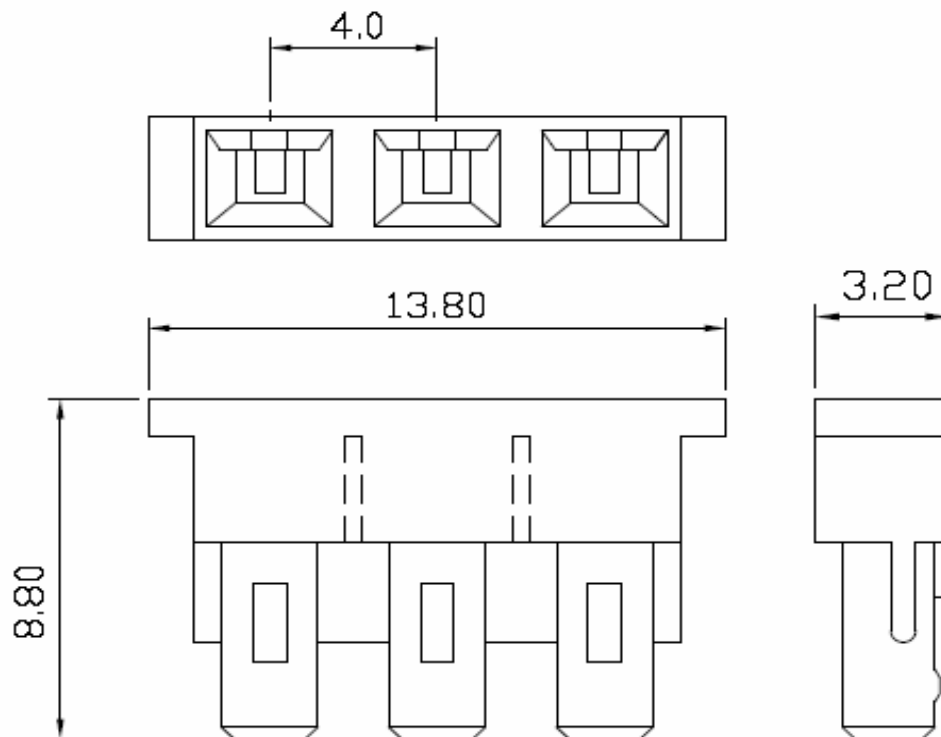


**Wire to Wire Connector  
Pitch 4,00mm**

Part No.: **T70K049**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	30.10.2010
APPD:	Schumi			FINISH	Jamy		Sheet No.		1 from 2

Customer:

# EDCON-COMPONENTS



## Ordering Informations

Serie	ROHS	Packing				
T70K049	R	BU				

R= ROHS Conform	BU= Bulk-Ware
N= NON ROHS Conform	

<b>Wire to Wire Connector Pitch 4,00mm</b>	
Part No.:	<b>T70K049</b>
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	30.10.2010
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 2