


EDCON-COMPONENTS



Technical Discription


Pitch	2,54mm
No of Conductor	2~30Pin
Conductor Diameter	0,50mm
Total Length from / to	10 ~ 3000mm
Flammability Rating:	UL94V-0
Current Rating:	3A
Voltage Rating:	1000V/Min.
Insulation Film:	Kapton or Nomex or Polyester
Temperatur Rating:	Kapton = 150°C Nomex = 125°C Polyester = 105°C

Drawing

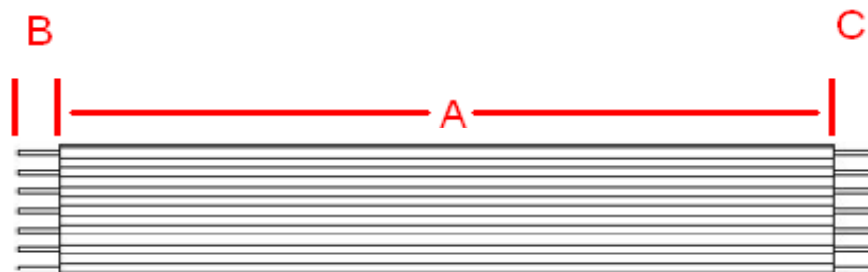

Both ends strip

A= Length tolerance Dimension	Code A Explanation
A= >12-200mm +/- 2mm	0012-0200
A= 200-400mm +/- 2mm	0200-0400
A= >400mm +/- 2mm	0400-3000

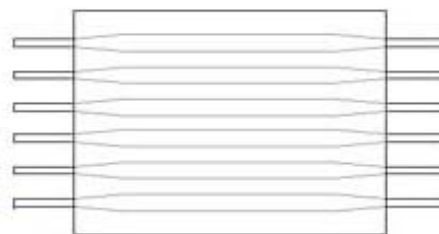

**Round end Jumper Flat
Cable Pitch 2,54mm**

Part No.:

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	04.01.2018
APPD:	Schumi			FINISH	Jamy		Sheet No.		1 from 2

EDCON-COMPONENTS



Ordering Informations

Terminal

Serie	No of Conductor	Insulation Film	Length B	Length C	Insulation Length A	ROHS	Packing
T29024	10	N	Bx	Cx	Axxxx	R	BG1

10= 10Pos. You can selection 2~30Pos.	N= Nomex	B1= 3,0mm +/- 0,5mm	C1= 3,0mm +/- 0,5mm	Axxxx= 0010 to 3000mm	R= ROHS conform	BG1= Polybag w. 100PCS
	K= Kapton	B2= 3,5mm +/- 0,5mm	C2= 3,5mm +/- 0,5mm		N= NON ROHS conform	
	P= Polyester	B3= 4,0mm +/- 0,5mm	C3= 4,0mm +/- 0,5mm	Example A0010 = 10mm A0100 = 100mm A1000 = 1000mm		
		B4= 5,0mm +/- 1,0mm	C4= 5,0mm +/- 1,0mm			

**Round end Jumper Flat
Cable Pitch 2,54mm**

Part No.: **T29024**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	04.01.2018
APPD:	Schumi			FINISH	Jamy		Sheet No.	2 from 2	Customer: