


# EDCON-COMPONENTS



## Technical Discription


Pitch	1,27mm
No of Conductor	2~30Pin
Conductor Diameter	0,30mm
Total Length from / to	10 ~ 3000mm
Flammability Rating:	UL94V-0
Current Rating:	1,6A
Voltage Rating:	1000V/Min.
Insulation Film:	Kapton or Nomex or Polyester
Temperatur Rating:	Kapton = 150°C Nomex = 125°C Polyester = 105°C

## Drawing

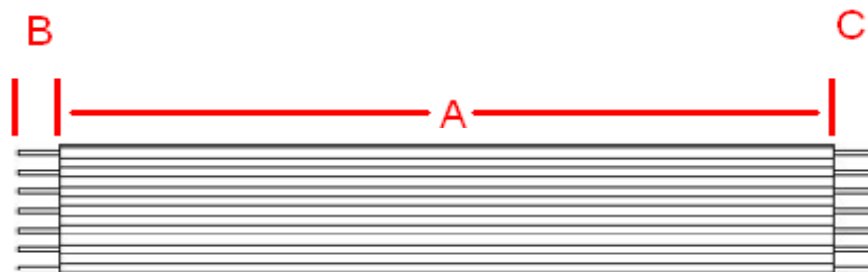

Both ends strip

A= Length tolerance Dimension	<b>Code A</b>
A= >12-200mm +/- 2mm	<b>0012-0200</b>
A= 200-400mm +/- 2mm	<b>0200-0400</b>
A= >400mm +/- 2mm	<b>0400-3000</b>

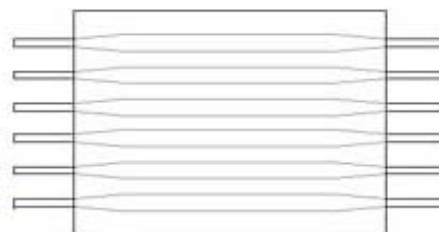

**Round end Jumper Flat  
Cable Pitch 1,27mm**

Part No.:

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	08.06.2017
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 2	

# EDCON-COMPONENTS



## Ordering Informations

### Terminal

Serie	No of Conductor	Insulation Film	Length B	Length C	Insulation Length A	ROHS	Packing
T29026	10	P	Bx	Cx	Axxxx	R	BG

10= 10Pos. You can selection 2~30Pos.	P= Polyester	B1= 3,0mm +/- 0,5mm	C1= 3,0mm +/- 0,5mm	Axxxx= +/- 0010 to 3000mm	R= ROHS conform	BG101= Polybag w. 100PCS
	N= Nomex	B2= 3,5mm +/- 0,5mm	C2= 3,5mm +/- 0,5mm		N= NON ROHS conform	
	K= Kapton	B3= 4,0mm +/- 0,5mm	C3= 4,0mm +/- 0,5mm			
		B4= 5,0mm +/- 1,0mm	C4= 5,0mm +/- 1,0mm			

**Round end Jumper Flat  
Cable Pitch 1,27mm**

Part No.: **T29026**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	08.06.2017
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 2

Customer: