

# EDCON-COMPONENTS



## SPECIFICATION:


Contact Rating:	100VA
Pull In Value (PI):	80~240AT
Drop Out Value (DO):	≥ 30AT
Contact Resistance:	≤ 50mΩ
Breakover Voltage:	≥ 1000VDC
Insulation Resistance:	≥ 100MΩ
Electrostatic Capacitance:	0,5pf
Max. Switching Voltage:	500VDC
Max. Switching Current:	4A
Max. Carry Current:	8A
Operaing time:	≤ 5ms
Bounce Time:	≤ 5ms
Release Time:	≤ 2ms
Maximum Operating Freq.:	100Hz
Operating Temperature:	-10°C ~ +70°C

## Description



Reed contacts are hermetically sealed within a glass tube and do not receive the external atmospheric environment;  
 Quick response, and light weight;  
 Superior corrosion resistance and wear resistance of the contacts assures stable switching operation and long life;  
 Composed fast with the coil and magnet, reed switch can be used for reed relay or sensor;  
 Widely used in household appliances, control equipment, communication equipment, communication, automotive electronic

## Drawing

常开型NO type



转换型Changeover type

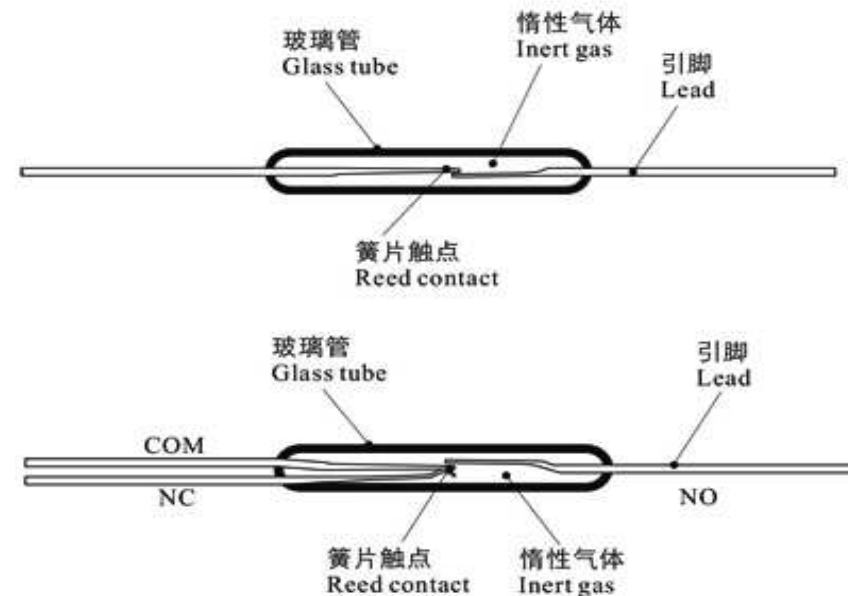

**Reed Switch 6,5x42mm**

Part No.: **Q39101**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	25.02.2014	Customer:
APPD:	Schumi			FINISH	Jamy		Sheet No. XSH-1	1 from 2		

[www.edcon-components.com](http://www.edcon-components.com)

email: info@edcon-components.com

# EDCON-COMPONENTS



## Ordering Informations

Serie	Contact form	Pull In Value	Special function	Special function	ROHS	Packing				
<b>Q39101</b>	<b>2</b>	<b>A</b>	<b>1</b>	<b>X</b>	<b>R</b>	<b>BU</b>				

	A= Pull in Value 80-130	1= No special function	X= No special function	N= Non ROHS	BU= Bulk Ware	
2= contact form 1C	B= Pull in Value 130-190			R= ROHS conform		
	C= Pull in Value 190-240					

<b>Reed Switch 6,5x42mm</b>
Part No.: <b>Q39101</b>
Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	25.02.2014
APPD:	Schumi			FINISH	Jamy		Sheet No. XSH-1		2 from 2