

# EDCON-COMPONENTS



## SPECIFICATION:


Contact Rating:	10VA
Pull In Value (PI):	75~120AT
Drop Out Value (DO):	≥ 25AT
Contact Resistance:	≤ 200mΩ
Breakover Voltage:	≥ 250VDC
Insulation Resistance:	≥ 100MΩ
Electrostatic Capacitance:	1,5pf
Max. Switching Voltage:	100VDC
Max. Switching Current:	0,5A
Max. Carry Current:	2A
Operaing time:	≤ 1,5ms
Bounce Time:	≤ 1ms
Release Time:	≤ 0,5ms
Maximum Operating Freq.:	200Hz
Operating Temperature:	-10°C ~ +70°C

## Description



Reed contacts are hermetically sealed within a glass tube and do not receive the external atmospheric environment;  
 Quick response, and light weight;  
 Superior corrosion resistance and wear resistance of the contacts assures stable switching operation and long life;  
 Composed fast with the coil and magnet, reed switch can be used for reed relay or sensor;  
 Widely used in household appliances, control equipment, communication equipment, communication, automotive electronic

## Drawing

常开型NO type



转换型Changeover type

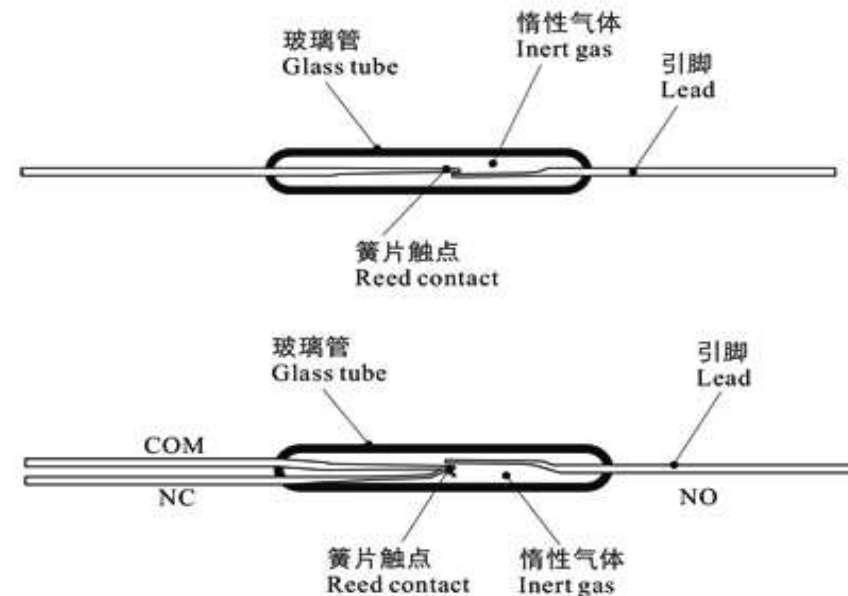

**Reed Switch 5x50mm**

Part No.: **Q39104**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	25.02.2014
APPD:	Schumi			FINISH	Jamy		Sheet No. XGH-5Z		1 from 2

Customer:

# EDCON-COMPONENTS



## Ordering Informations

Serie	Contact form	Pull In Value	Special function	Special function	ROHS	Packing				
<b>Q39104</b>	<b>2</b>	<b>A</b>	<b>1</b>	<b>X</b>	<b>R</b>	<b>BU</b>				

	A= Pull in Value 120-180	1= No special function	X= No special function	N= Non ROHS	BU= Bulk Ware	
2= contact form 1C	B= Pull in Value 180-240			R= ROHS conform		
	C= Pull in Value 240-300					

<b>Reed Switch 5x50mm</b>	
Part No.:	<b>Q39104</b>
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	25.02.2014
APPD:	Schumi			FINISH	Jamy		Sheet No. XGH-5Z		2 from 2