

# EDCON-COMPONENTS



## SPECIFICATION:


Contact Rating:	5VA
Pull In Value (PI):	45~65AT
Drop Out Value (DO):	≥ 12AT
Contact Resistance:	≤ 200mΩ
Breakover Voltage:	≥ 200VDC
Insulation Resistance:	≥ 100MΩ
Electrostatic Capacitance:	1,0pf
Max. Switching Voltage:	60VDC
Max. Switching Current:	0,3A
Max. Carry Current:	1A
Operating time:	≤ 1,5ms
Bounce Time:	≤ 1ms
Release Time:	≤ 0,5ms
Maximum Operating Freq.:	200Hz
Operating Temperature:	-10°C ~ +70°C

## Description



Reed contacts are hermetically sealed within a glass tube and do not receive the external atmospheric environment;  
 Quick response, and light weight;  
 Superior corrosion resistance and wear resistance of the contacts assures stable switching operation and long life;  
 Composed fast with the coil and magnet, reed switch can be used for reed relay or sensor;  
 Widely used in household appliances, control equipment, communication equipment, communication, automotive electronic

## Drawing

常开型NO type



转换型Changeover type

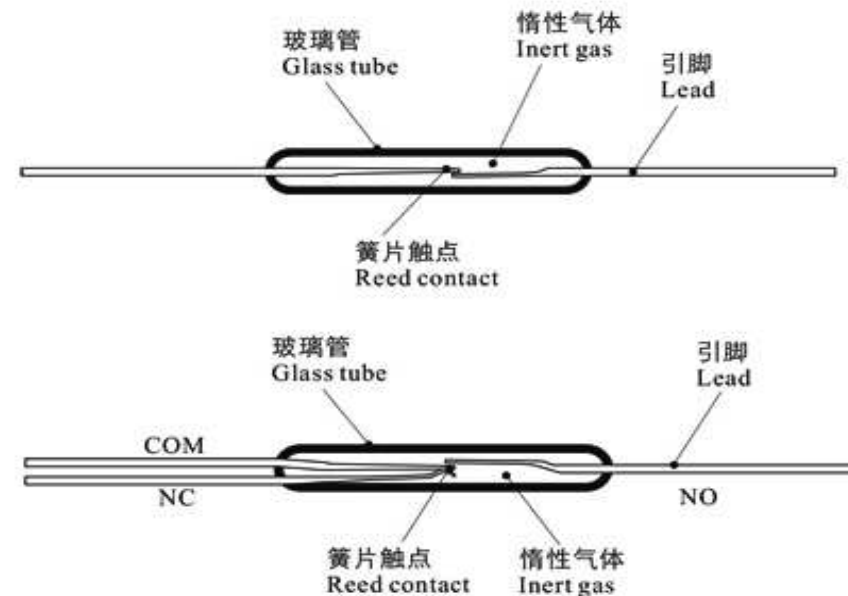

**Reed Switch 4x36mm**

Part No.: **Q39106**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	25.02.2014
APPD:	Schumi			FINISH	Jamy		Sheet No. XGH-4Z		1 from 2

Customer:  
 email: info@edcon-components.com

[www.edcon-components.com](http://www.edcon-components.com)

