



## SPECIFICATION:


Contact Rating:	10VA
Pull In Value (PI):	50~80AT
Drop Out Value (DO):	≥ 15AT
Contact Resistance:	≤ 200mΩ
Breakover Voltage:	≥ 200VDC
Insulation Resistance:	≥ 100MΩ
Electrostatic Capacitance:	0,8pf
Max. Switching Voltage:	60VDC
Max. Switching Current:	0,5A
Max. Carry Current:	2A
Operaing time:	≤ 1,5ms
Bounce Time:	≤ 0,8ms
Release Time:	≤ 0,4ms
Maximum Operating Freq.:	200Hz
Operating Temperature:	-10°C ~ +70°C

## Description



Reed contacts are hermetically sealed within a glass tube and do not receive the external atmospheric environment;  
 Quick response, and light weight;  
 Superior corrosion resistance and wear resistance of the contacts assures stable switching operation and long life;  
 Composed fast with the coil and magnet, reed switch can be used for reed relay or sensor;  
 Widely used in household appliances, control equipment, communication equipment, communication, automotive electronic

## Drawing

常开型NO type



转换型Changeover type

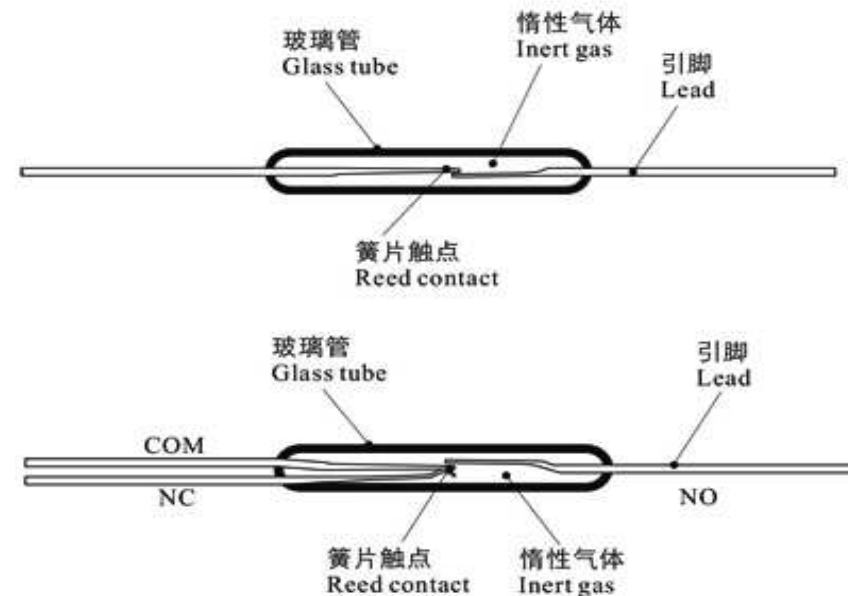

**Reed Switch 4x38mm**

Part No.: **Q39107**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	25.02.2014	Customer:
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 2		

