

EDCON-COMPONENTS



SPECIFICATION:


Contact Rating:	1,0VA
Pull In Value (PI):	25~50AT
Drop Out Value (DO):	≥ 10AT
Contact Resistance:	≤ 200mΩ
Breakover Voltage:	≥ 150VDC
Insulation Resistance:	≥ 100MΩ
Electrostatic Capacitance:	0,5pf
Max. Switching Voltage:	30VDC
Max. Switching Current:	0,1A
Max. Carry Current:	0,3A
Operaing time:	≤ 1ms
Bounce Time:	≤ 1ms
Release Time:	≤ 0,5ms
Maximum Operating Freq.:	100Hz
Operating Temperature:	-10°C ~ +60°C

Description



Reed contacts are hermetically sealed within a glass tube and do not receive the external atmospheric environment;
 Quick response, and light weight;
 Superior corrosion resistance and wear resistance of the contacts assures stable switching operation and long life;
 Composed fast with the coil and magnet, reed switch can be used for reed relay or sensor;
 Widely used in household appliances, control equipment, communication equipment, communication, automotive electronic

Drawing

常开型NO type



转换型Changeover type

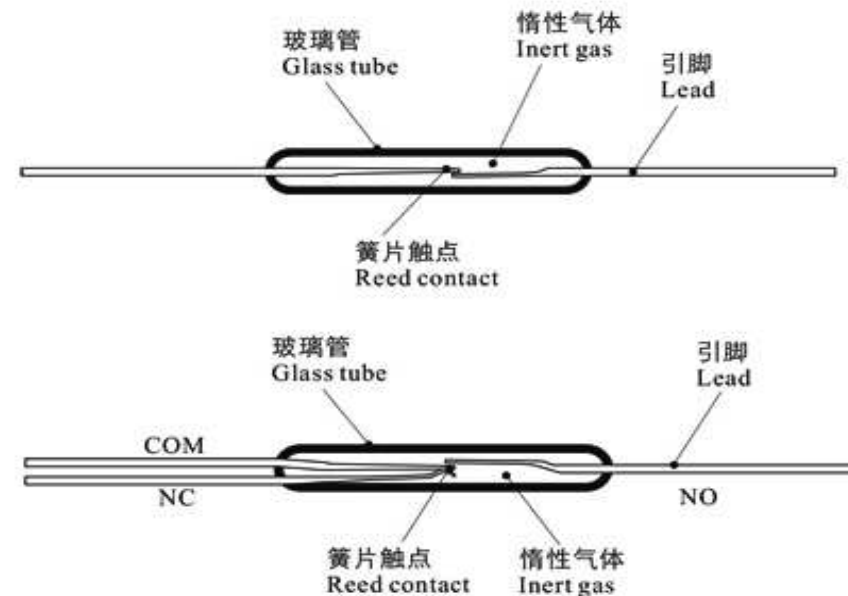

Reed Switch 3x20mm

Part No.: **Q39109**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	25.02.2014
APPD:	Schumi			FINISH	Jamy		Sheet No. XGH-3		1 from 2

Customer:

