





Material

Material:	Brass with Nickel plated
Protection level:	IP65-10 bar pressure (fixed installation)
Sealing	NBR
O-Sealing ring	NBR
Claw:	Nylon Plastic (PA)
Ambient Temperature:	. -40°C ~ +100°C temporary to: +120°C
Character:	Special design of clamping claw and clamping ring. Wide clamping range high stretching resistance, water proof dust proof salt resistant. Resistant for weak acid, alcohol, oil, grease and general solvent

Technical Drawing

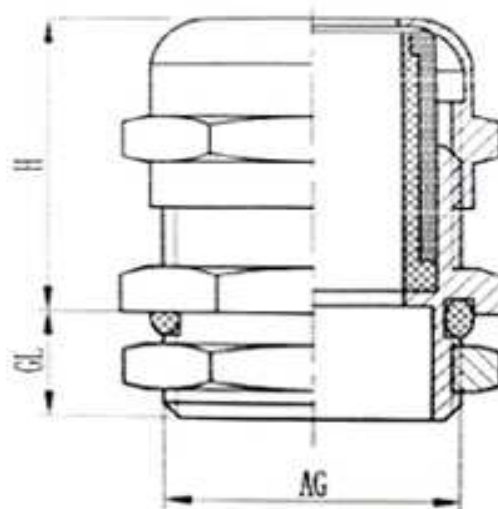

Flat hole Metal Cable Gland PG-Thread

Part No.: **231086**

Customer:

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	03.06.2011
APPD:	Join			FINISH	Shieh	Sheet	1 from 2



EDCON[®]
COMPONENTS
A MEMBER OF EDCON-GROUP

Dimension Table

[illegible]

Ordering Information

Serie	Size	No function	ROHS	Packing		
-------	------	-------------	------	---------	--	--

231086	M18A	N	R	B1		
--------	------	---	---	----	--	--

Look dimension table	N =No function	R = ROHS Conform	B1 = 100PCS in one Poly Bag
		0 = NON ROHS	

Flat hole Metal Cable Gland PG-Thread	
Part No.:	231086
Customer:	

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	03.06.2011
APPD:	Join			FINISH	Shieh	Sheet	2 from 2

