




Material

Material: UL-certified nylon PA 66, 94V-2
Temperature Range: min -40°C ~ max. +100°C
Protection Degree: IP68 using with O-ring (NBR)
Standard Color: Gray RAL7035, Black RAL9005 other colors are available on request

Technical Drawing

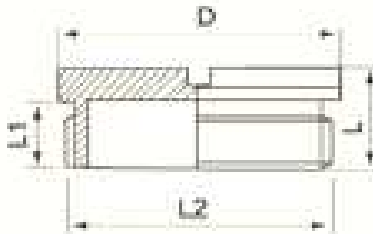

Cross Slit Blind Plug Thread		M-
Part No.:		231082
Customer:		

DRW:	Jason	CHKD	Jules	MATL:	Wu
APPD:	Join			FINISH	Shieh

DATE	28.07.2016
Sheet	1 from 2



Dimension Table

Size	Thread Size	Thread O.D. L2 (mm)	Thread O.D. L1 (mm)	Main Body L (mm)	Cover D (mm)		
PG7	PG7	12,5	8,5	12,2	15		
PG9	PG9	15,2	8,5	13	19		
PG11	PG11	18,6	9	13	22		
PG13,5	PG13,5	20,4	9	13	25		
PG16	PG16	22,5	10,5	15	27		
PG21	PG21	28,3	10,5	15,5	33		
PG29	PG29	37	11,5	16	44		
PG36	PG36	47	13,5	18	55		
PG42	PG42	54	13,5	18,6	62		
PG48	PG48	59,3	14,5	19,5	68		

Ordering Information

Serie	Size	Color	ROHS	Packing		
231082	PG7	7035	R	BU		

Look dimension table	7001 =Silver Gray	R = ROHS Conform N = NON ROHS	BU = Bulk- Ware into Polybag
	7035 = Light Gray		
	9005 = Black		
	5015 = Blue		
	9003 = White		
	3020 = Red		



Cross Slit Blind Plug M-Thread	
Part No.:	231082
Customer:	

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	28.07.2016
APPD:	Join			FINISH	Shieh	Sheet	2 from 2

Copyright by S.Tiede