






Technical Specification

Insulator:	Black glass filled polyester PPS-GF-30-FR
Flammability:	UL 94V-0
Sleeve:	Brass CuZn 36Pb3 (36000)
Mating Pin: (Ø)	0,41mm
Mechanical Life:	min 500 cycles
Rated Current:	1A
Contact Resistance:	max. 10m Ohm
Dielectric Strength:	min 500V rms
Minimal position of deliver:	2
Maximal position of deliver:	50

O-Code	L (mm)
A01	4,95
A02	6,60
A03	
A04	
A05	
A06	
A07	
A08	
A09	
A10	
A11	
A12	

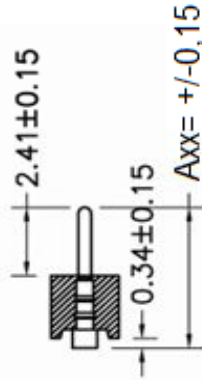

Technical Drawing

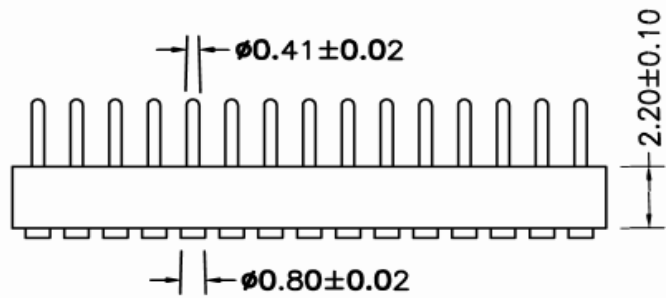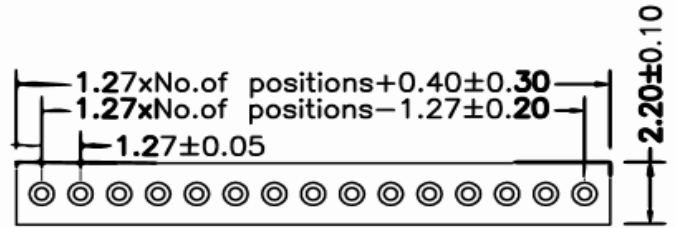

PCB-Layout (mm)

Ordering Information

Serie	No. of Pos.	Solder Pin Plating	Pin Length Code	ROHS	Packing
T40231	50	A	A01	R	TU

02 ~ 50	A= Tin 150µ" (Standard) B= Tin 200µ" C= GF D= Gold 3µ" E= Gold 10µ" F= Gold 15µ" G= Gold 30µ" H=Special	A01= Look Table	R= ROHS conform N= NON ROHS conform	TU= Tube Pcking TR = Tape/ Reel w. Pic and Place Cap Ix = individuall
----------------	---	------------------------	--	--

**Machined Contact Pitch
1,27mm**

Part No.: **T40231**

Customer:

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	30.01.2023
APPD:	Join			FINISH	Shieh	Sheet	1 from 1