

EDCON-COMPONENTS



Technical Discription



Material:
 Housing: 30% Glass filled PBT UL94V-0
 Contacts: Phosphor Bronze
 Plating: Gold Plated 3μ over 50μ Nickel
 Tin Plated 100μ over 50μ Nickel

Electrical Characteristics:
 Current Rating: 1Amp.
 Insulator Resistance: 5000MΩ min, at DC 500V.
 Contact Resistance: 20mΩ max, at DC100mA
 Operating Temperature: . -55°C ~ + 105°C

Features:
 For DIP with 100% lead spacing
 Lever actuated zero insertion force mechanismus
 Socket easily dissembles for repairability.
 Socket contact point of 110° below top surface of socket

| Dimension in (mm) | | | |
|-------------------|------|------|------|
| Position | A | B | C |
| 24 | 45,1 | 40,7 | 27,9 |
| 28 | 50,2 | 45,8 | 33,0 |
| 32 | 55,3 | 50,9 | 38,1 |
| 40 | 65,5 | 61,0 | 48,3 |
| 48 | 75,6 | 71,2 | 58,4 |
| | | | |
| | | | |
| | | | |
| | | | |

Drawing

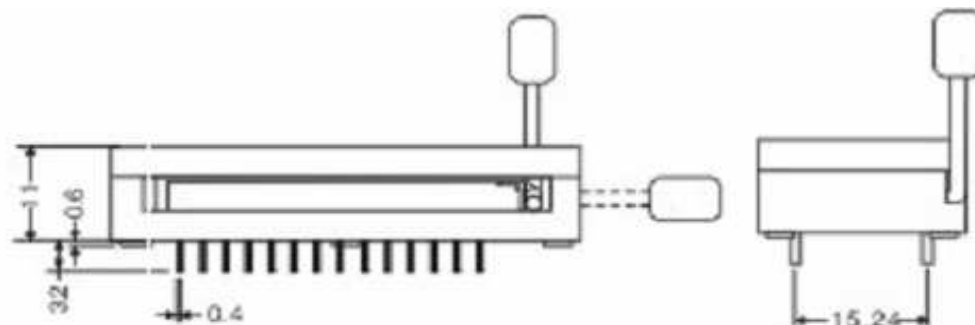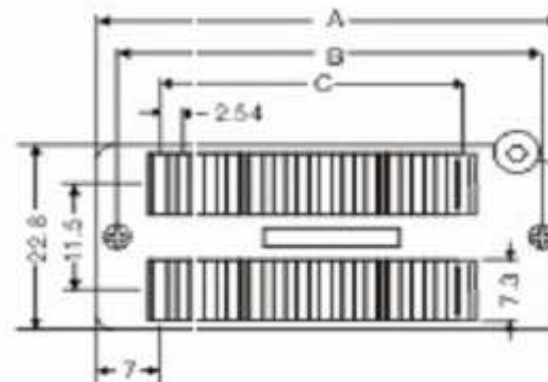

**ZIP-DIP-Socket Type 2
Pitch 2,54mm**

Part No.:

Customer:

| | | | | | | | | | |
|-------|--------|------|--------|--------|--------|-----------|-----------|----------|------------|
| DRW: | Jason | CHKD | Wilson | MATL: | Wilson | TOLERANCE | Mason | DATE | 10.09.2011 |
| APPD: | Schumi | | | FINISH | Jamy | | Sheet No. | 1 from 2 | |

EDCON-COMPONENTS



Ordering Informations

Terminal

| Serie | No. Of Pos. | Lead space | Contact Plating | Body Color | ROHS | Packing |
|--------|-------------------|----------------------------|---|---|--|------------------------------------|
| T72002 | 24 | 6 | TN | GN | R | TY |
| | 24= 24Pos. | 6= Pitch 15,24mm | TN= Tin plated G0= Gold plated | GN= Green BL= Blue BK= Black | R= ROHS Conform N= NON ROHS Conform | TY= Tray TU= Tube |

**ZIP-DIP-Socket Type 2
Pitch 2,54mm**

Part No.: **T72002**

| | | | | | | | | | |
|-------|--------|------|--------|--------|--------|-----------|-----------|------|------------|
| DRW: | Jason | CHKD | Wilson | MATL: | Wilson | TOLERANCE | Mason | DATE | 10.09.2011 |
| APPD: | Schumi | | | FINISH | Jamy | | Sheet No. | | 2 from 2 |

Customer: