

EDCON-COMPONENTS



Technical Discription


Material:
 Housing: 30% Glass filled PBT UL94V-0
 Contacts: Phosphor Bronze
 Plating: Gold Plated 3μ over 50μ Nickel
 Tin Plated 100μ over 50μ Nickel

Electrical Characteristics:
 Current Rating: 1Amp.
 Insulator Resistance: 5000MΩ min, at DC 500V.
 Contact Resistance: 20mΩ max, at DC100mA
 Operating Temperature: . -55°C ~ + 105°C

Features:
 For DIP with 100% lead spacing
 Lever actuated zero insertion force mechanismus
 Socket easily dissembles for repairability.
 Socket contact point of 110° below top surface of socket

Dimension in (mm)			
Position	A	B	C
40	55,0	50,7	38,2

Drawing

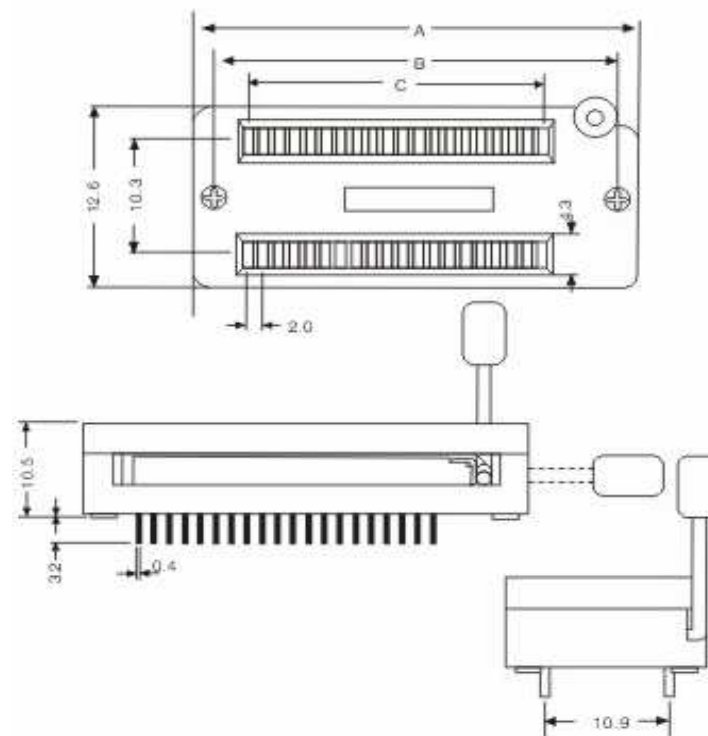

ZIP-DIP-Socket Type 3 Pitch 2,0mm
Part No.:
Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	10.09.2011
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 2	

EDCON-COMPONENTS



Ordering Informations

Terminal

Serie	No. Of Pos.	Lead space	Contact Plating	Body Color	ROHS	Packing
T72003	40	4	TN	GN	R	TY
	24= 24Pos.	4= Pitch 10,24mm	TN= Tin plated GO= Gold plated	GN= Green BL= Blue BK= Black	R= ROHS Conform N= NON ROHS Conform	TY= Tray TU= Tube

**ZIP-DIP-Socket Type 3
Pitch 2,0mm**

Part No.: **T72003**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	10.09.2011
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 2

Customer: