

# EDCON-COMPONENTS



## Technical Discription


**Material:**  
 Housing: 30% Glass filled PBT UL94V-0  
 Contacts: Phosphor Bronze  
 Plating: Gold Plated 3 $\mu$  over 50 $\mu$  Nickel  
 Tin Plated 100 $\mu$  over 50 $\mu$  Nickel

**Electrical Characteristics:**  
 Current Rating: 1Amp.  
 Insulator Resistance: 5000M $\Omega$  min, at DC 500V.  
 Contact Resistance: 20m $\Omega$  max, at DC100mA  
 Operating Temperature: . -55 $^{\circ}$ C ~ + 105 $^{\circ}$ C

**Features:**  
 For DIP with 100% lead spacing  
 Lever actuated zero insertion force mechanismus  
 Socket easily dissembles for repairability.  
 Socket contact point of 110 $^{\circ}$  below top surface of socket

Dimension in (mm)			
Position	A	B	C
28	40,5	36,1	23,1
32	44,1	39,7	26,6
42	52,8	48,2	35,9
56	65,4	61,0	48,0
64	72,3	62,9	55,1
50	59,8	55,1	43,0

## Drawing

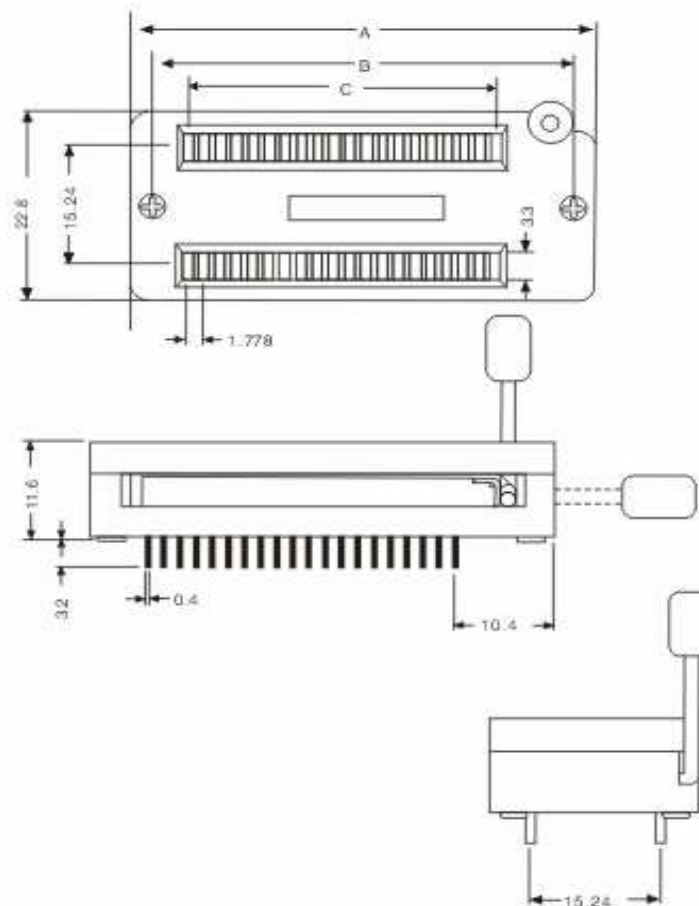

<b>ZIP-DIP-Socket Type 4</b> <b>Pitch 1,778mm</b>
Part No.:
Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	10.09.2011
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 2	

# EDCON-COMPONENTS



## Ordering Informations

### Terminal

Serie	No. Of Pos.	Lead space	Contact Plating	Body Color	ROHS	Packing
T72004	28	6	TN	GN	R	TY
	<b>28=</b> 28Pos.	<b>6=</b> Pitch 15,24mm	<b>TN=</b> Tin plated	<b>GN=</b> Green	<b>R=</b> ROHS Conform	<b>TY=</b> Tray
			<b>G0=</b> Gold plated	<b>BL=</b> Blue	<b>N=</b> NON ROHS Conform	<b>TU=</b> Tube
			<b>BK=</b> Black			

**ZIP-DIP-Socket Type 4  
Pitch 1,778mm**

Part No.: **T72004**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	10.09.2011	Customer:
APPD:	Schumi			FINISH	Jamy		Sheet No.	2 from 2		