


# EDCON-COMPONENTS



## Technical Discription

Voltage Rating: 15A/250VAC T105

Approval 

Voltage Rating: 10A / 250VAC

Approval 

Insulation Resistance: 1000MΩ (min) 500VDC

Dielectric withstand Voltage: 2500VAC 5s between Terminals 50~60Hz

Dielectric withstand Voltage: 3750VAC between Terminals to Base 50~60Hz


Insert & Extract Force: 1,36Kg - 6,8Kg

Leakage Current: 1mA

Termnial Strength: ≥ 80N

Operating Life: ≥ 5000 cycles

## Drawing

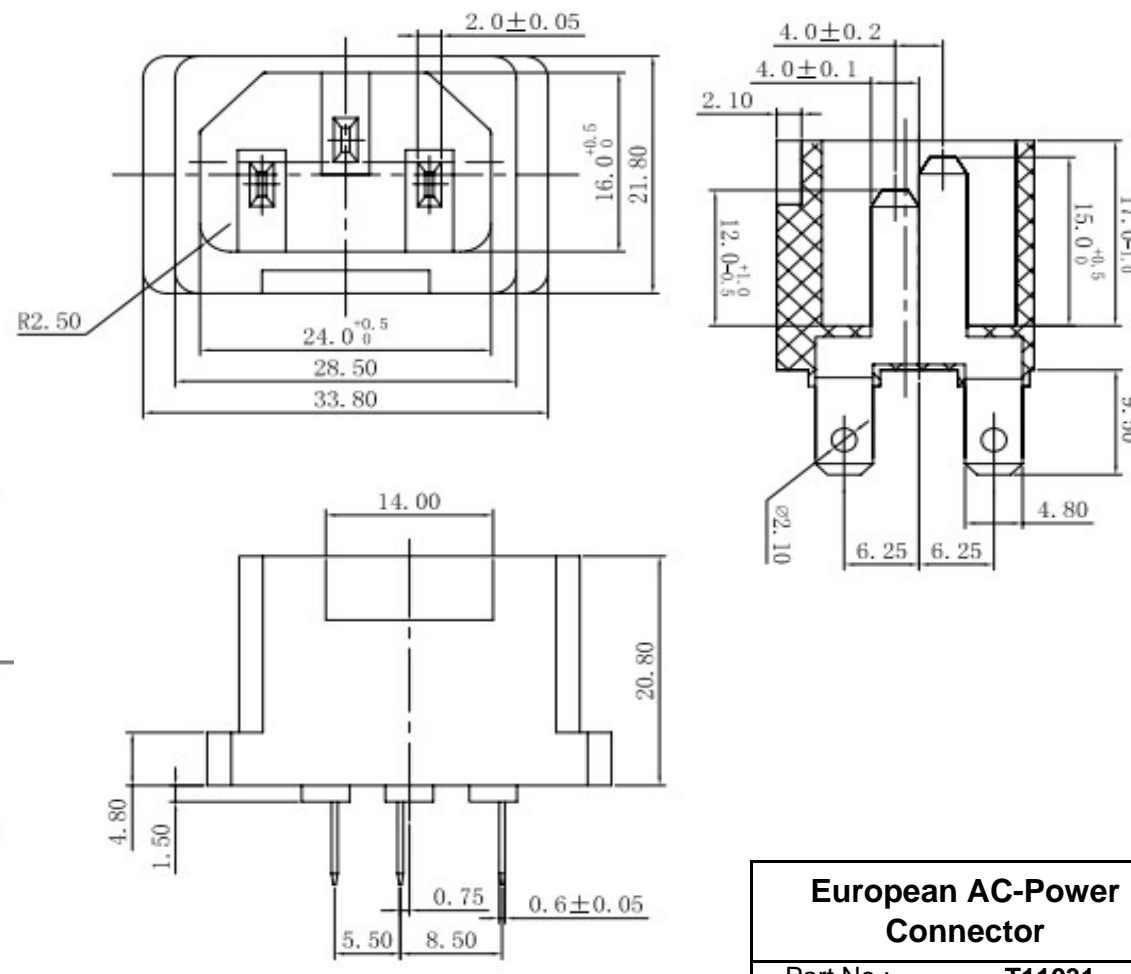

Panel Cutout

**European AC-Power Connector**

Part No.: **T11031**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	04.08.2016
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 2	

[www.edcon-components.com](http://www.edcon-components.com)

email: [info@edcon-components.com](mailto:info@edcon-components.com)

# EDCON-COMPONENTS



## Ordering Informations

Serie	Body Colour	Panel Thickness A	Dimension D	Connecting Terminal	Spezial Function	Spezial Function	ROHS	Packing		
-------	-------------	-------------------	-------------	---------------------	------------------	------------------	------	---------	--	--

<b>T11031</b>	<b>BK</b>	<b>N</b>	<b>N</b>	<b>A</b>	<b>N</b>	<b>N</b>	<b>R</b>	<b>BU</b>		
---------------	-----------	----------	----------	----------	----------	----------	----------	-----------	--	--

<b>BK= Black</b>	<b>N= No function</b>	<b>N= No function</b>	<b>A= 4,8mm Terminal</b>	<b>N= No function</b>	<b>N= No function</b>	<b>R= ROHS Conform</b>	<b>BU= Bulk-Ware</b>
<b>WH= White</b>			<b>B= Solder Lug Terminal</b>				<b>IV= Individual Package</b>
<b>RD= Red</b>							
<b>YE= Yellow</b>							
<b>GN= Green</b>							
<b>BL= Blue</b>							

**European AC-Power Connector**

Part No.: **T11031**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	04.08.2016
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 2

Customer: