


# EDCON-COMPONENTS



The Power of LED Light

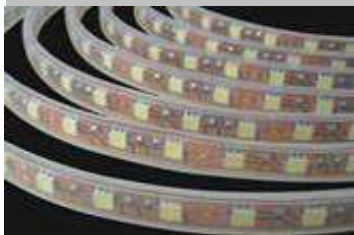

## Applications

It is made with silicon for outside tube but it is hollow inside without any glue.

Suitable for use in humid locations such as bathrooms and for use outdoors, like on garden furniture or accent lighting on houses and buildings..

## Features

Available in DC 12Volt or DC 24Volt maximum

Operating Temperature: -20°C ~ +50°C

Long Life span LED light, more than 50000hours

Viewing Angle of LED 120°

Available in Different White areas

2400K, 2700K, 3000K, 4200K, 5500K, 6000K, 8000K, 10000K

Available in color, Red, Green, Blue, Yellow, Pink,

Dimension of Flex-LED-Strip

Length: 5000mm

Width: 12mm

Thickness: 4mm

## Technical Informations

|                             |                  |
|-----------------------------|------------------|
| Size of LED                 | 5050             |
| LED per Meter               | 60PCS            |
| Voltage of LED Strip        | 24Volt           |
| Power of LED Strip          | 14,4Watt         |
| Emitting Color of LED Strip | Cool White 4200K |
| Lumen per Meter             | 967~1170lm       |
| Protection Degree           | IP67             |

**LED Flex-Strip LED-Size  
5050**

Part No.: **M33A9076**

|       |        |      |        |        |        |           |           |      |            |
|-------|--------|------|--------|--------|--------|-----------|-----------|------|------------|
| DRW:  | Jason  | CHKD | Wilson | MATL:  | Wilson | TOLERANCE | Mason     | DATE | 07.02.2012 |
| APPD: | Schumi |      |        | FINISH | Jamy   |           | Sheet No. |      | 1 from 2   |

Customer:

# EDCON-COMPONENTS



The Power of LED Light



## Ordering Informations

| Part-No. | Special function | ROHS | Packing |  |  |  |
|----------|------------------|------|---------|--|--|--|
| M33A9076 | X                | R    | TR      |  |  |  |

|                        |                     |                 |
|------------------------|---------------------|-----------------|
| X= No special function | R= ROHS Conform     | TR= Tape / Reel |
|                        | N= NON ROHS Conform |                 |

**LED Flex-Strip LED-Size 5050**

Part No.: **M33A9076**

|       |        |      |        |        |        |           |           |          |            |           |
|-------|--------|------|--------|--------|--------|-----------|-----------|----------|------------|-----------|
| DRW:  | Jason  | CHKD | Wilson | MATL:  | Wilson | TOLERANCE | Mason     | DATE     | 07.02.2012 | Customer: |
| APPD: | Schumi |      |        | FINISH | Jamy   |           | Sheet No. | 2 from 2 |            |           |

[www.edcon-components.com](http://www.edcon-components.com)

email: [info@edcon-components.com](mailto:info@edcon-components.com)