



# EDCON-COMPONENTS



## Specifications

Current Rating:	1 Ampere
Insulator Resistance:	5000 Megaohm min.
Contact Resistance:	10m Ohm max.
Dielectric Withstanding:	AC 500V
Mechanical Life:	min 500 cycles
Contact Material:	Brass CuZn 36Pb3
Insulator Material:	Glass filled Polyester,
Standard:	P.B.T.
Contact Plating:	Tin, Gold or Selective Plated
Standard:	Gold Flash Overall

## Drawing

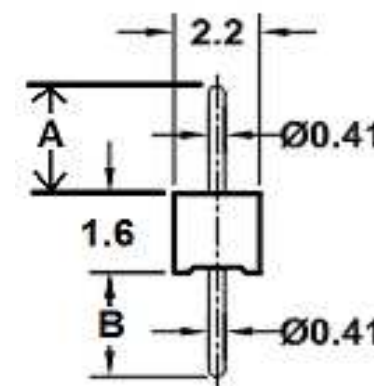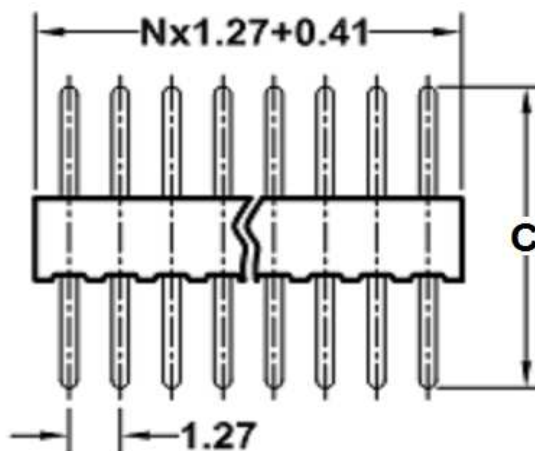

Machined Contact Male Header  
Pitch 1,27mm

Part No.: **T40130**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	23.01.2014
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 3	



## Pin Code length table free configuration

Order Code	Dimension (mm)		
	A	B	C
A01	3,40	1,00	6,00
A02			
A03			
A04			
A05			
A06			
A07			
A08			
A09			
A10			
A11			
A12			
A13			
A14			
A15			
A16			
A17			
A18			
A19			
A20			
A21			
A22			

Order Code	Dimension (mm)		
	A	B	C
A23			
A24			
A25			
A26			
A27			
A28			
A29			
A30			
A31			
A32			
A33			
A34			
A35			
A36			
A37			
A38			
A39			
A40			
A41			
A42			
A43			
A44			

Order Code	Dimension (mm)		
	A	B	C
A45			
A46			
A47			
A48			
A49			
A50			
A51			
A52			
A53			
A54			
A55			
A56			
A57			
A58			
A59			
A60			
A61			
A62			
A63			
A64			
A65			
A66			

Machined Contact Male Header  
Pitch 1,27mm

Part No.: **T40130**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	23.01.2014
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 3



## Ordering Informations

Serie	No. of Pos.	Pin length Code	Contact Plating	ROHS	Packing				
<b>T40130</b>	-	<b>XX</b>	<b>A01</b>	<b>C</b>	<b>R</b>	<b>B1</b>			

XX= total	Look Pin code Table	A= Tin 150μ (standard)	N=NO ROHS conform	B1= Bulk
		B= Tin 200μ		Ix= individual
		C= Gold Flash	R=ROHS conform	
		D= Gold 2μ		
		E= Gold 3μ		
		F= Gold 10μ		
		G= Gold 15μ		
		H= Gold Special		

Machined Contact Male Header Pitch 1,27mm
Part No.: <b>T40130</b>
Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	23.01.2014
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 3