


EDCON-COMPONENTS




Specifications


Voltage Rating: 250 VAC/DC
 Current Rating: 5A AC/DC
 Operating Temperature: -25°C to + 85°C
 Contact Resistance: 10 mΩ
 Withstanding Voltage: 1500V AC/Minute
 Insulation Resistance: 1000MΩ min.
 Material Housing: Nylon 6T UL94V-0
 Pin-Material: Brass
 Color of Body: Natural

P.C.B. Layout





Type A

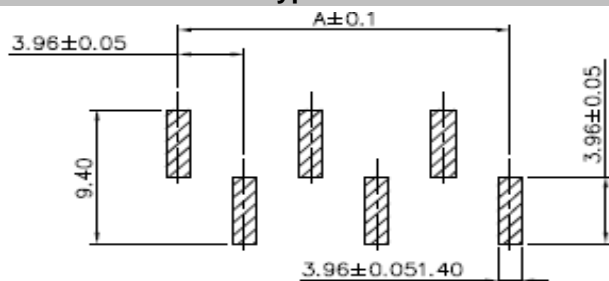

Type B

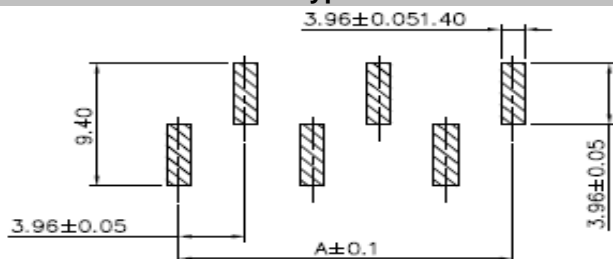

Drawing (dimensions all into mm)

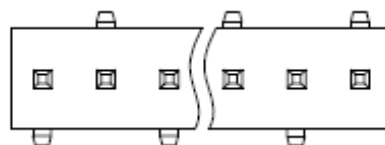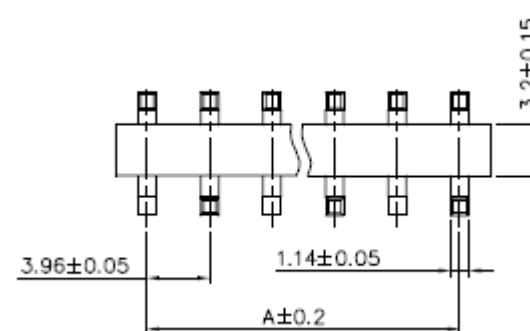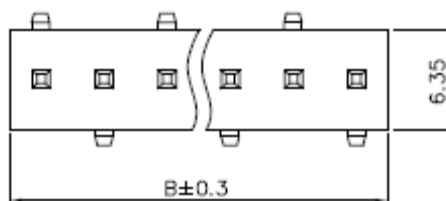


Wafer Serie T68Jxxxx Pitch
3,96mm

Part No.: **T68J036-**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	14.04.2017
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 4	

EDCON-COMPONENTS



Ordering Informations


Serie	Number of Pos.	Contact Plating	Color of Body	Layout Type	Special function	Packing				
-------	----------------	-----------------	---------------	-------------	------------------	---------	--	--	--	--

T68J036-	02	TN	NA	A	N	BU				
-----------------	-----------	-----------	-----------	----------	----------	-----------	--	--	--	--

02 = 2Pos.	TN= tinned	NA= Natural	A= Layout Type A	N= No special function	BU= Bulk-ware				
xx = xxPos like table	GF= Gold flash		B= Layout Type B						


Wafer Serie T68Jxxxx Pitch 3,96mm
Part No.: T68J036-
Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	14.04.2017
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 4



Soldering Profile Curve

Classification Reflow Profile (JEDEC J-STD-020C)

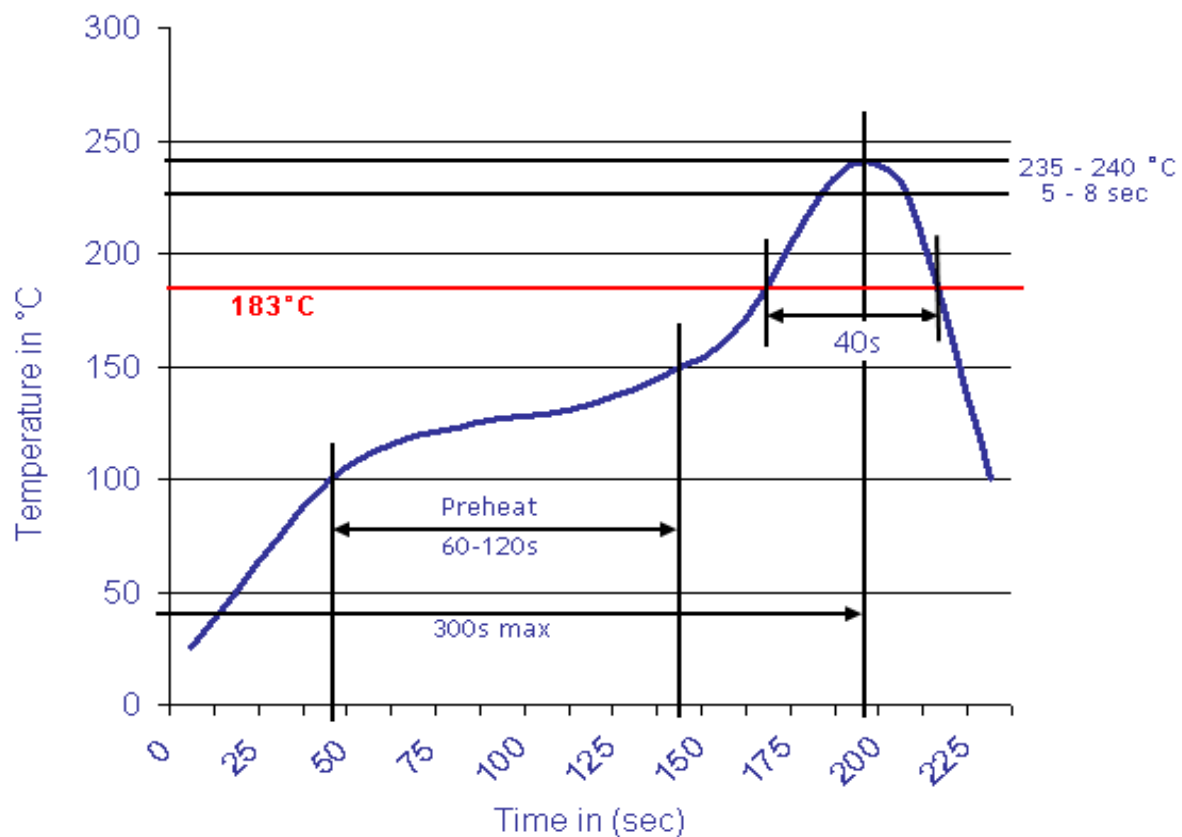

Wafer Serie T68Jxxxx Pitch 3,96mm
Part No.: T68J036-
Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	14.04.2017
APPD:	Schumi			FINISH	Jamy		Sheet No.	4 from 4	