



## R47004-030

### Features:

Size 1812
Lead Free and compliant with the European Union
Fast tripping resettable circuit protection
Surface mount packaging for automated assembly

### Technical Specifications:

**I<sub>H</sub>** Hold current maximum current device will pass without interruption in 25° C still air unless

**I<sub>T</sub>**: Trip current: minimum current that will switch the device from low resistance, Resistance in 25°C still unless otherwise specified.

**I<sub>max</sub>**: Maximum current device can VMAXIMAX 100 vcycles --- NO arcing or burning.

**V<sub>max</sub>**: Maximum Voltage device can withstand without damage at rated current.

**P<sub>d</sub>**: power dissipated from device when in the tripped state in 25°C still air unless otherwise specified.

**R<sub>min</sub>**: Minimum resistance of device as supplied at 25°C unless otherwise specified.

**R<sub>1</sub> max.** Maximum device resistance in the nonstripped state 1 hour post reflow.

### Approval:



<b>SMT POLY FUSE</b>	<b>SIZE</b>
	<b>1812</b>

Part No.:	<b>R47004-030</b>
-----------	-------------------

Customer:


DRW:	Lexua	CHKD	Wilson	MATL:	ChuChu	DATE	08.02.2017
APPD:	Jimmy			FINISH	Josy	Sheet	1 from 3

Copyright by S.Tiede



## Technical Drawing and Informations

### Dimensions

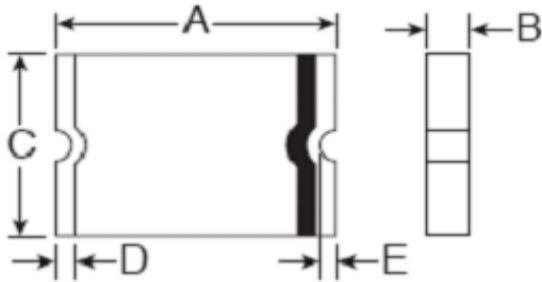


A (mm)		B (mm)		C (mm)		D (mm)		E (mm)	
Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.
4,37	4,73	3,07	3,41	0,635	0,89	0,25		0,200	--

### Performance Rating:

Range	ICH	IT	V <sub>max</sub>	I <sub>m ax</sub>	Pd <sub>typ</sub>	Maximum Time to Trip		Resistance:		
	(A)	(A)	(V DC)	(A)	(W)	Current	Time	Rmin	Rmax	R1max
	(A)	(A)	(V DC)	(A)	(W)	(A)	(Sec.)	(Ω)	(Ω)	(Ω)
<b>300mA</b>	<b>0,300</b>	<b>0,60</b>	<b>30,0</b>	<b>8,0</b>	<b>0,80</b>	<b>8,00</b>	<b>0,100</b>	<b>0,60</b>	<b>0,25</b>	<b>3,00</b>

### PAD Layout



A (mm)	B (mm)	C (mm)
3,45	1,78	3,15

**SMT POLY FUSE SIZE 1812**

Part No.: **R47004-030**

Customer:


DRW:	Lexua	CHKD	Wilson	MATL:	ChuChu	DATE	08.02.2017
APPD:	Jimmy			FINISH	Josy	Sheet	2 from 3

Copyright by S.Tiede




### Soldering Information

#### Lead Solder Performance

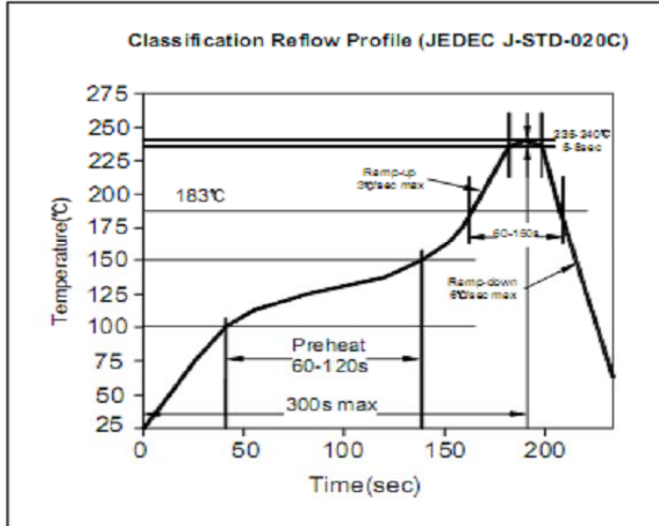

#### Lead free Solder Performance

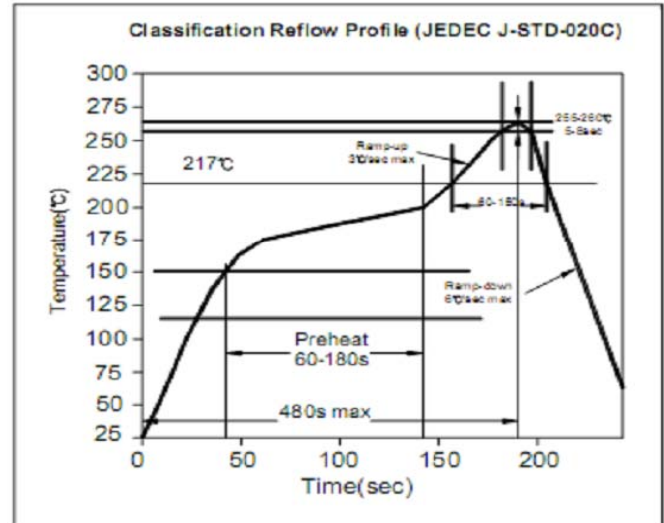

### Ordering Informations:

Item-No. & Range	ROHS	Packing
------------------	------	---------

<b>R47004-030</b>	<b>R</b>	<b>TR</b>
-------------------	----------	-----------

**030** = 300mA

<b>R=</b> ROHS	<b>TR=</b> Tape / Reel Standard)
<b>N=</b> Non ROHS	
<b>BU=</b> Bulk	

**SMT POLY FUSE SIZE 1812**

Part No.: **R47004-030**

Customer:

DRW:	Lexua	CHKD	Wilson	MATL:	ChuChu	DATE	08.02.2017
APPD:	Jimmi			FINISH	Josi	Sheet	3 from 3

Copyright by S.Tiede