

EDCON-COMPONENTS




Technical Discription



Drawing

Approval: CE
 Rated Voltage: 250VDC / 250VAC
 Rated Current: 5A
 Wire Range: AWG18 ~ 20
 Ambient Temp.: -40°C ~ +105°C
 Strip length: 6~7mm
 Pitch:
 Poles: 1P, 2P,
 Housing: PA46 / PA6T , UL94V-0
 Pin Header: Brass tin plated

Packing: Tape/Reel

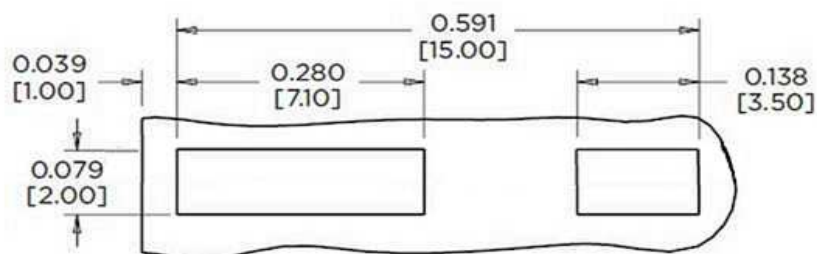

RECOMMENDED PCB LAYOUT

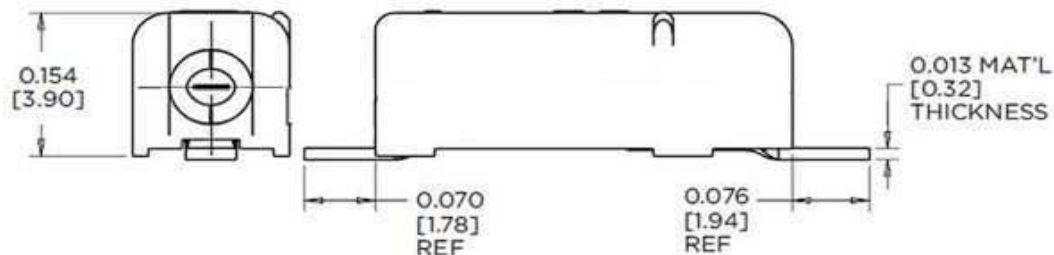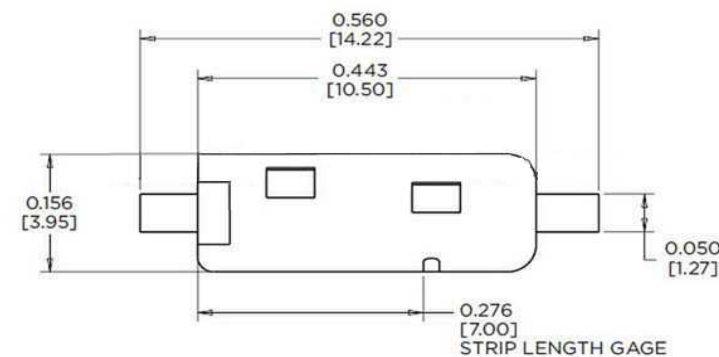

SMD PCB LED Connector

Part No.: **TA11003**


DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	08.11.2013	Customer:
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 4		

EDCON-COMPONENTS






Technical Discription

Drawing

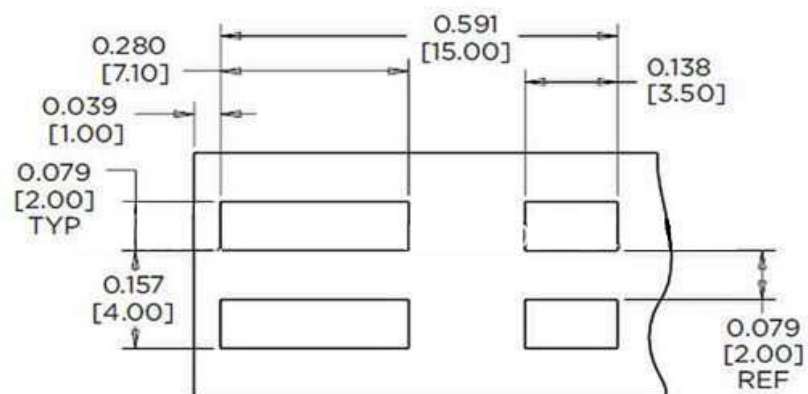

RECOMMENDED PCB LAYOUT

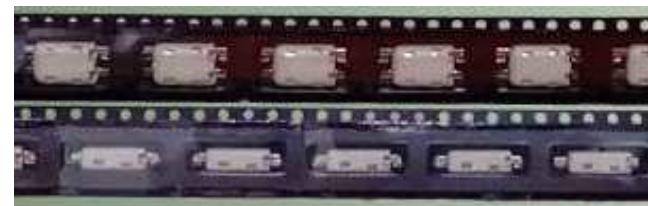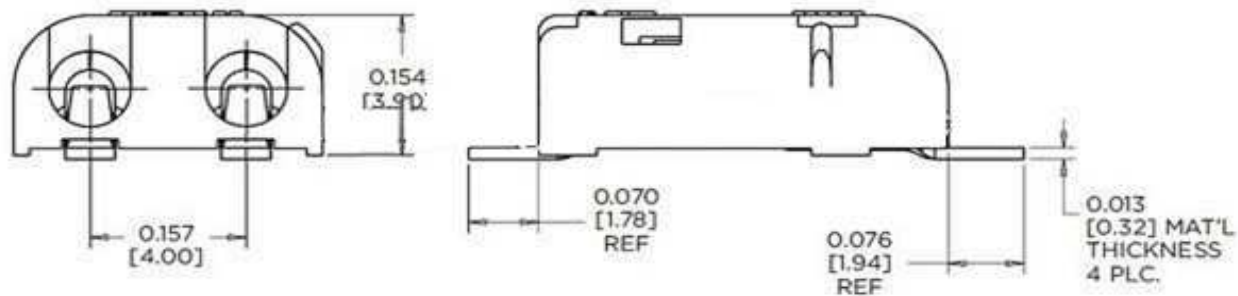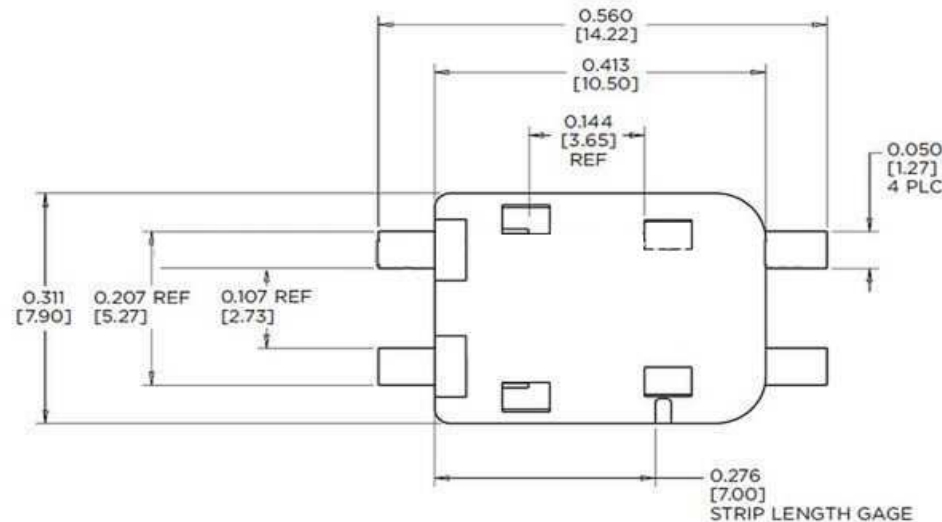

SMD PCB LED Connector	
Part No.:	TA11003
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	08.11.2013
APPD:	Schumi			FINISH	Jamy		Sheet No.	2 from 4	

www.edcon-components.com

email: info@edcon-components.com

EDCON-COMPONENTS



Ordering Informations

Serie	No. Pos.	Color Code	Spezial Function	Spezial Function	ROHS	Packing				
-------	----------	------------	------------------	------------------	------	---------	--	--	--	--

TA11003	1	GY	0	0	R	TR				
----------------	----------	-----------	----------	----------	----------	-----------	--	--	--	--

1 = One Pos.	GY = gray	0 = No function	0 = No function	R = ROHS Conform	BU = Bulk-Ware
2 = Two Pos.					TR = Tape Reel


SMD PCB LED Connector
Part No.: TA11003
Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	08.11.2013
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 4



Soldering Profile Curve

Classification Reflow Profile (JEDEC J-STD-020C)

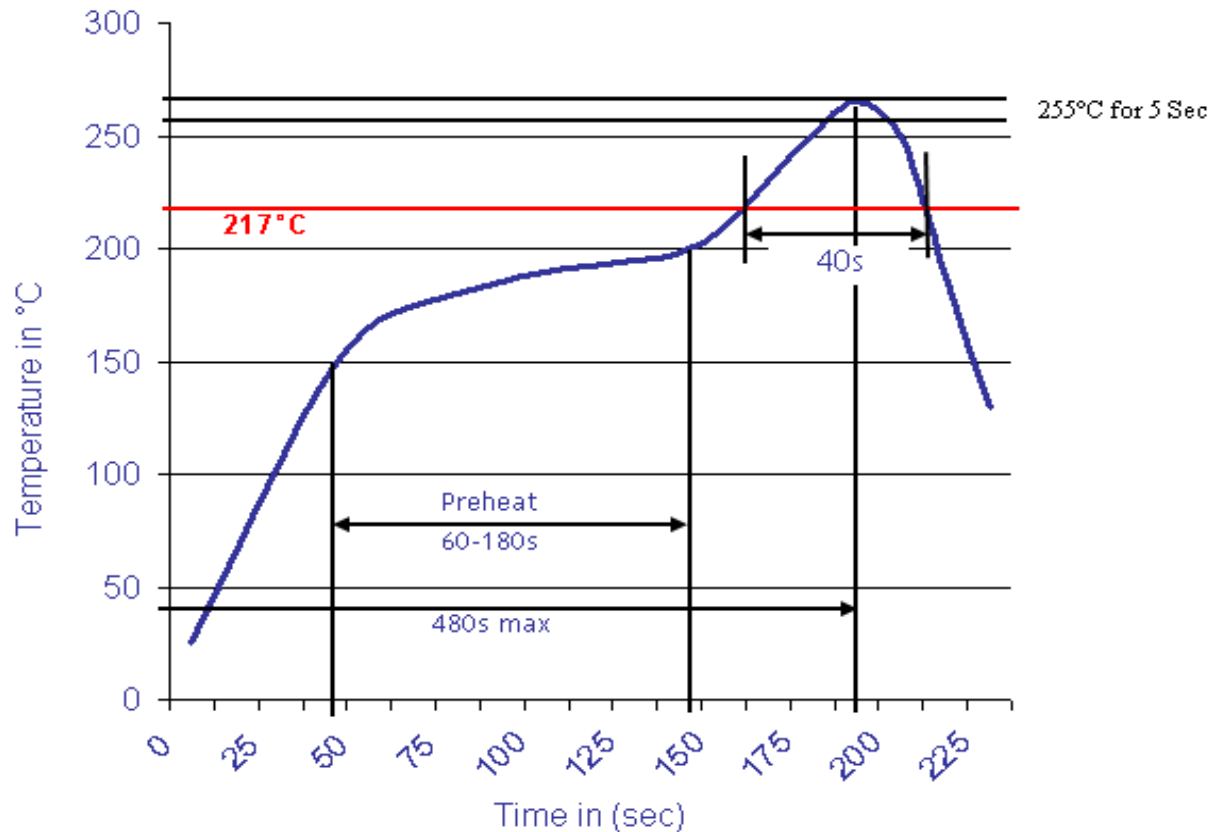

SMD PCB LED Connector	
Part No.:	TA11003
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	08.11.2013
APPD:	Schumi			FINISH	Jamy		Sheet No.	4 from 4	