

Data Sheet

Elevated Terminal Block

Pitch: 5,08 mm

Serie: A13M043

Customer Information for special Item

EDCON Customer : 0

Customer Version No. : 0


EDCON-COMPONENTS



Technical Discription

Electrical	UL	IEC
Rated Voltage	250 Volt	300V
Rated Current	18A	15A
Wire Range		
Solid Wire		AWG 14~26
Stranged Wire		AWG 14~26
Withstanding Voltage		2,5KV/ 1Min.
Insulation Resistance		5000MΩ / 1000V
Mechanical		
Operating Temperature		-40°C ~ +105°C
Wire Strip Length		7mm
Dimensions		
Pitch (mm)		5,08
Poles		2 + 3Pos. ~ 24 Pos.
Materials		
Terminal Housing		PA66 (UL94V-0)
Clamp		Brass Tin, plated
Wire guard		Wire guard solder Pin
Terminal screw		Steel Zinc plating

Drawing (Dimension in mm)

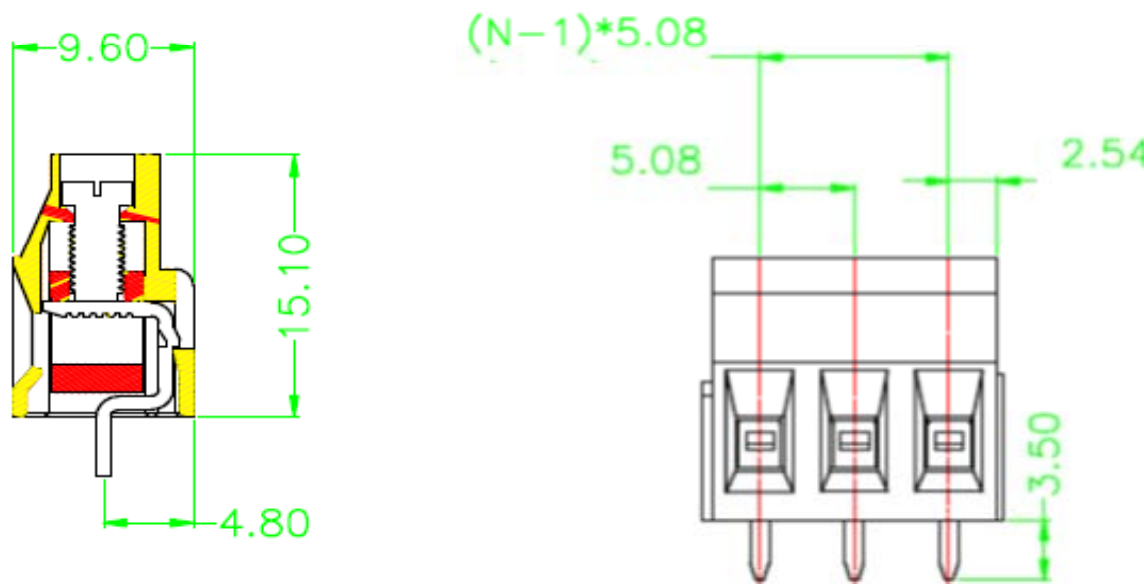

Elevated Terminal Block

Part No.: **A13M043**

Customer:


DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	25.10.2013
APPD:	Schumi			FINISH	Jamy		Sheet No.		1 from 4

EDCON-COMPONENTS



PCB Layout

Dimensions (mm)

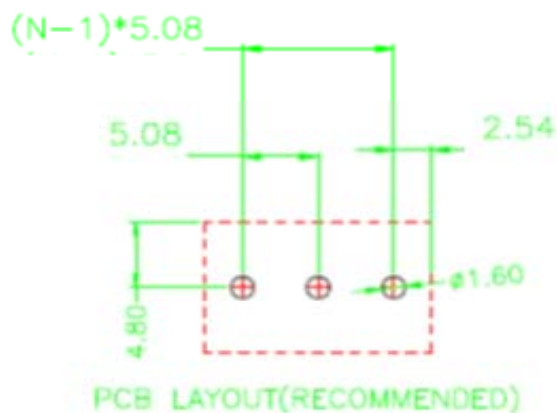

No. of Pos.	Tol. A	N	Tol. B
02	± 0,15	5,08	± 0,15
03	± 0,15	10,16	± 0,15
04	± 0,15	15,24	± 0,15
05	± 0,15	20,32	± 0,15
06	± 0,15	25,40	± 0,15
07	± 0,25	30,48	± 0,25
08	± 0,25	35,56	± 0,25
09	± 0,25	40,64	± 0,25
10	± 0,25	45,72	± 0,25
11	± 0,25	50,80	± 0,25
12	± 0,25	55,88	± 0,25
13	± 0,35	60,96	± 0,35
14	± 0,35	66,04	± 0,35
15	± 0,35	71,12	± 0,35
16	± 0,35	76,20	± 0,35
17	± 0,35	81,28	± 0,35
18	± 0,35	86,36	± 0,35
19	± 0,35	91,44	± 0,35
20	± 0,40	96,52	± 0,40
21	± 0,40	101,60	± 0,40
22	± 0,40	106,68	± 0,40
23	± 0,40	111,76	± 0,40
24	± 0,40	116,84	± 0,40

Elevated Terminal Block

Part No.: **A13M043**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	25.10.2013
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 4



EDCON-COMPONENTS



Ordering Informations

Serie	No. of Pos.	Body Color	No Function	Approval Code	ROHS	Packing	EDCON Cust. No.	Customer Version		
-------	-------------	------------	-------------	---------------	------	---------	-----------------	------------------	--	--

A13M043	02	PG	A	N	R	B				
----------------	-----------	-----------	----------	----------	----------	----------	--	--	--	--

Pitch 5,08	02 = Number of Pos. Standard 2 + 3Pos- ~ 24Pos.	PG = Phoenix Green (Standard) WH = White GN = Green GY = Gray LG = Light Gray OR = Orange BL = Blue BK = Black	A = Slotted Screw Type (Standard)  B = Cross Slotted Screw Type 	N = NON Approval A = UL /UR Approval Please consult EDCON for available B = VDE Approval Please consult EDCON for available C = TÜV Approval Please consult EDCON for available 0 = NON Plastic Approval	R = ROHS Conform N = NON ROHS Conform	B = Bulk-Ware I = Individual Package	xxxxxx = Customer Number	xxx = Customer Version ??(Printing)		
---------------	---	---	---	---	--	---	---------------------------------	--	--	--


Elevated Terminal Block
Part No.: A13M043
Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	25.10.2013
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 4



Soldering Profile Curve

Classification Reflow Profile (JEDEC J-STD-020C)

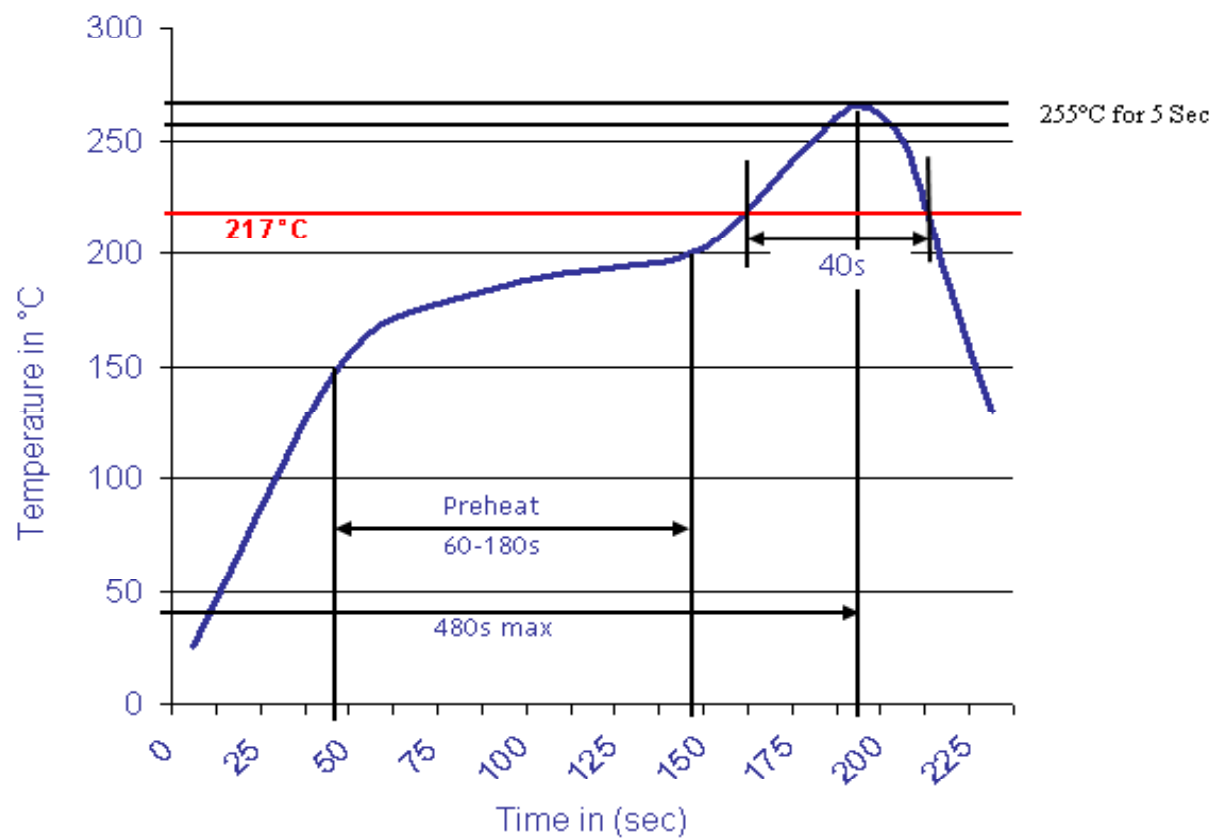

Elevated Terminal Block	
Part No.:	A13M043
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	25.10.2013
APPD:	Schumi			FINISH	Jamy		Sheet No.	4 from 4	