

EDCON-COMPONENTS




Technical Discription

Drawing

Spring loaded Connector

Pitch 2,54mm
Material:
 Insulator Black plastics (265°C) UL94V-0
 Pin Brass Au 0,5µm over Ni
 Number of Pins: 04 to 64

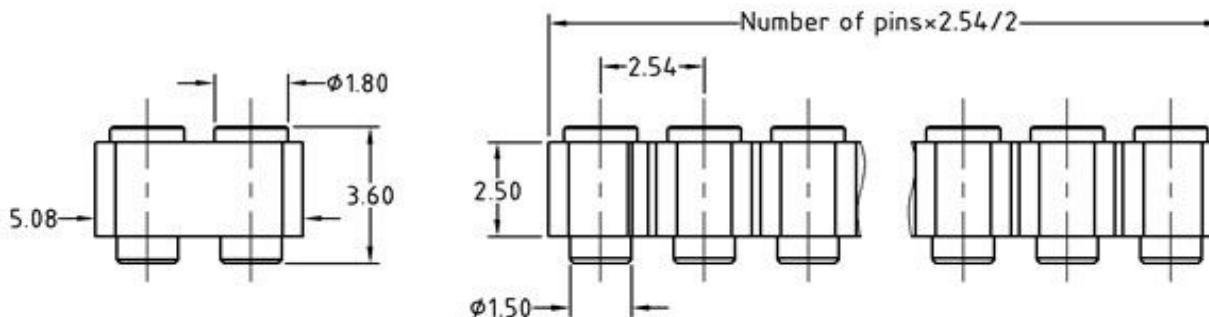

SMT POGO Pin Connector Dual Row	
Part No.:	TA23A9002
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.08.2014
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 3	

www.edcon-components.com

email: info@edcon-components.com

EDCON-COMPONENTS



Ordering Informations

Serie	No of Position	Contact Plating	Spezial Function	Spezial Function	ROHS	Packing				
-------	----------------	-----------------	------------------	------------------	------	---------	--	--	--	--

TA23A9002	xx	05	0	0	R	BU				
-----------	----	----	---	---	---	----	--	--	--	--

04 ~ 64	05= 5 µm AU	0= No function	0= No function	R= ROHS Conform	BU= Bulk-Ware 100PCS
	10= 10 µm AU				TU= Tube Packing
	15= 15 µm AU				
	20= 20 µm AU				TR= Tape Reel
	30= 30 µm AU				
other on request					

SMT POGO Pin Connector Dual Row	
Part No.:	TA23A9002
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.08.2014
APPD:	Schumi			FINISH	Jamy		Sheet No.	2 from 3	



Soldering Profile Curve

Classification Reflow Profile (JEDEC J-STD-020C)



SMT POGO Pin Connector Dual Row	
Part No.:	TA23A9002
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.08.2014
APPD:	Schumi			FINISH	Jamy		Sheet No.	3 from 3	