



EDCON-COMPONENTS




SPECIFICATION:

Current Rating:	50mA / 12VDC
Insulator Resistance:	100 Megaohm min.
Dielectric Withstanding:	AC 250V
Operating Temperature:	.-30°C to +85°C
Travel:	0,45mm ± 0,1mm
Insulator Material:	Nylon
Cover:	PBS-Strip
Contact Plating:	Stainless Steel Silver plated
Terminal:	Brass Silver plated
Contact Resistance:	100mΩ max.

Schematic

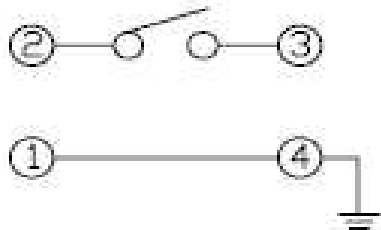

Drawing

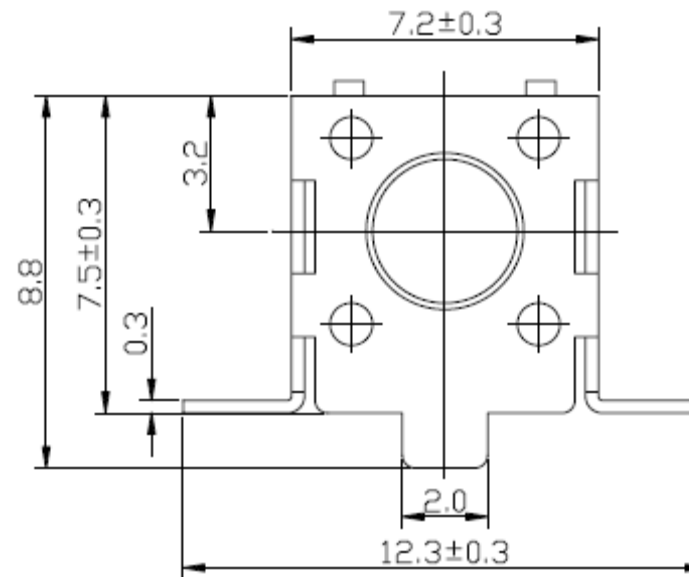

SMT TACT SWITCH 7,2x7,5mm

Part No.: **Q12134**

Customer:



DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	16.02.2015
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 4	

www.edcon-components.com

email: info@edcon-components.com



EDCON®
COMPONENTS
A MEMBER OF EDCON-GROUP

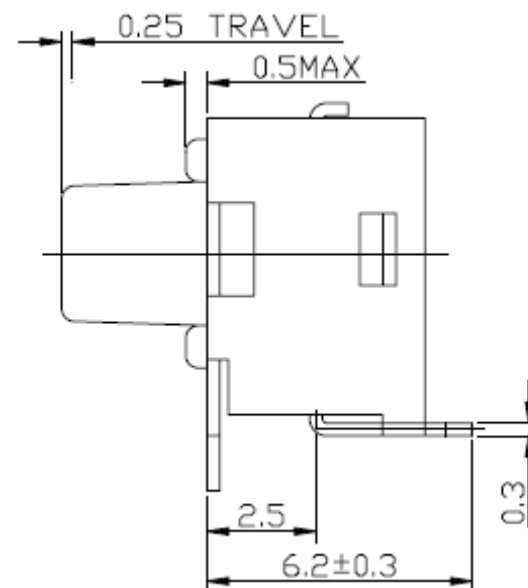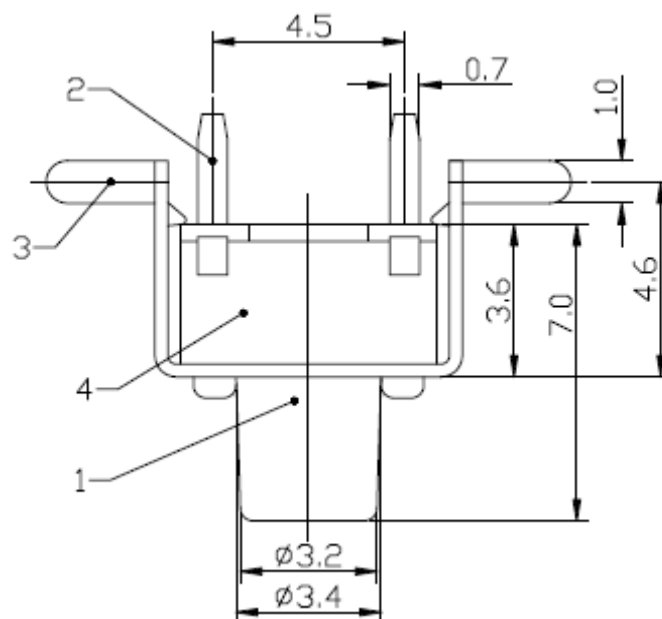[illegible]

SMT TACT SWITCH
7,2x7,5mm

Part No.: **Q12134**

Customer:


DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	16.02.2015
------	-------	------	--------	-------	--------	-----------	-------	------	------------

APPD:	Schumi			FINISH	Jamy		Sheet No.	2 from 4
-------	--------	--	--	--------	------	--	-----------	----------

www.edcon-components.com

email: info@edcon-components.com

EDCON-COMPONENTS



Ordering Informations

Serie	Total height w. Body	Fill with 0	Operating Force	Polarisation Peg	Electrical life	Fill with 0	ROHS	Packing		
Q12134	070	X	231	N	104	X	R	BU		


xxx= Look Knob Order Code L	X= no function	231= 230gr	N= without Peg	104= 100000 cycles	X= no function	N= non ROHS	BU= Bulk Ware
		331= 330gr				R= ROHS conform	

**SMT TACT SWITCH
7,2x7,5mm**


Part No.: **Q12134**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	16.02.2015
APPD:	Schumi			FINISH	Jamy		Sheet No.	3 from 4	


Customer:



Soldering Profile for Lead Soldering

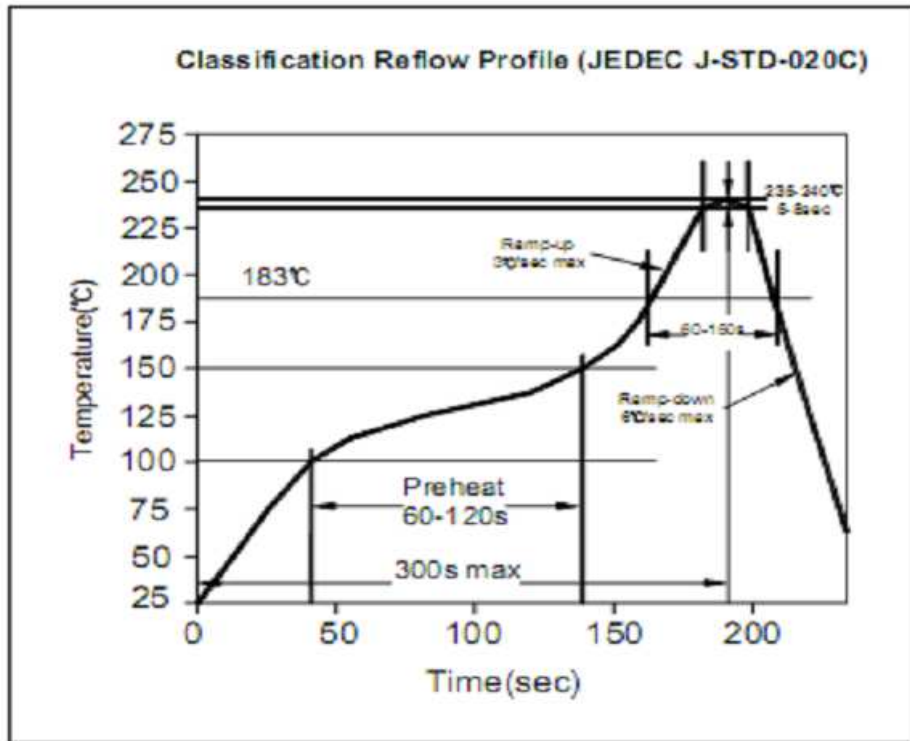

Soldering Profile for Lead Free Soldering

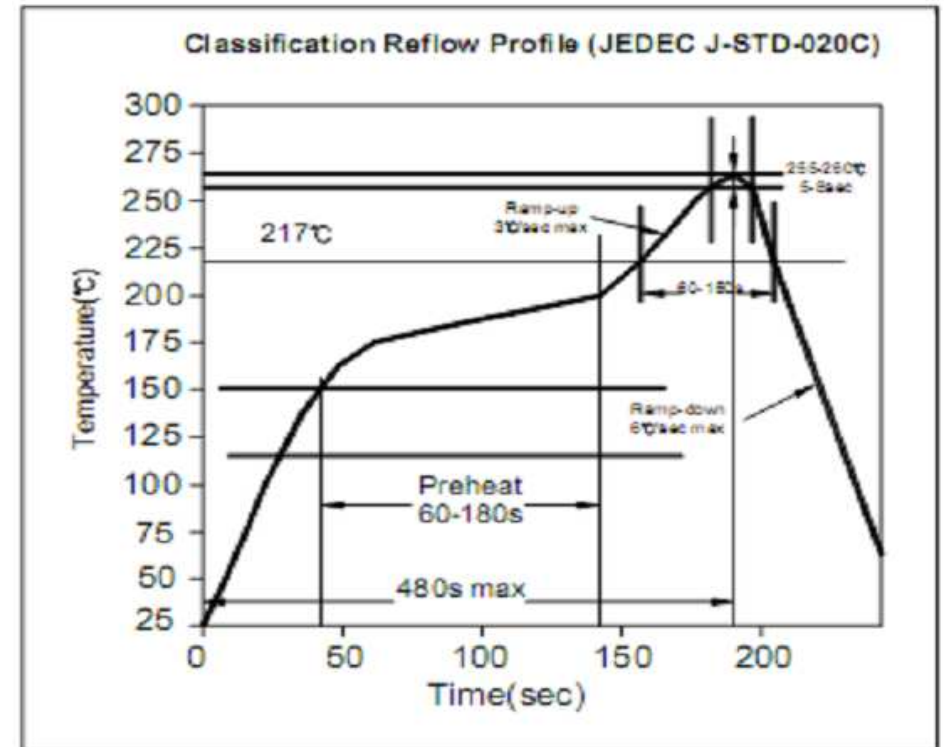

**SMT TACT SWITCH
7,2x7,5mm**

Part No.: **Q12134**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	16.02.2015
APPD:	Schumi			FINISH	Jamy		Sheet No.	4 from 4	

Customer: