



EDCON-COMPONENTS






SPECIFICATION:

Current Rating:	50mA / 12VDC
Insulator Resistance:	100 Megaohm min.
Dielectric Withstanding:	AC 250V
Operating Temperature:	.-30°C to +85°C
Travel:	0,45mm ± 0,1mm
Insulator Material:	Nylon
Cover:	PBS-Strip
Contact Plating:	Stainless Steel Silver plated
Terminal:	Brass Silver plated
Contact Resistance:	100mΩ max.

Schematic



Drawing

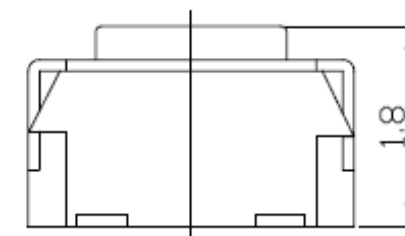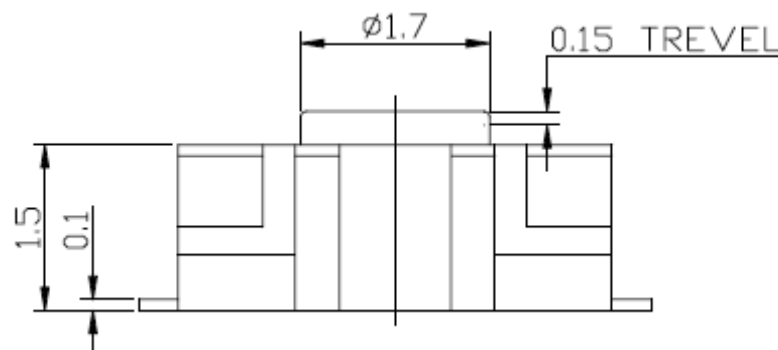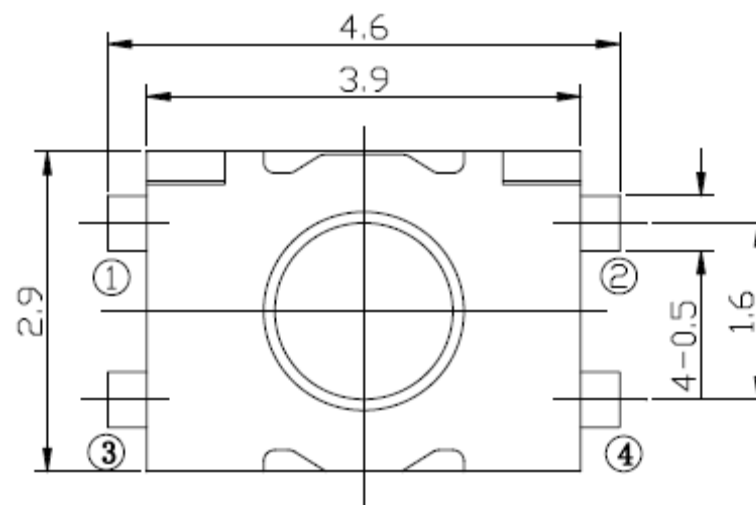


SMT TACT SWITCH
3,9x2,9mm

Part No.: **Q12138**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	12.05.2019
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 4	

EDCON-COMPONENTS




Knop Height Specifications (other specification on request)		Layout

[illegible]

SMT TACT SWITCH 3,9x2,9mm	
Part No.:	Q12138
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	12.05.2019
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 4

EDCON-COMPONENTS



Ordering Informations

Serie	Total height w. Body	Fill with 0	Operating Force	Polarisation Peg	Electrical life	Fill with 0	ROHS	Packing		
Q12138	-	xxx	X	251	N	104	X	R	BU	


xxx= Look Knob Order Code L	X= no function	251= 250gr	N= without Peg	104= 100000 cycles	X= no function	N= non ROHS	BU= Bulk Ware
						R= ROHS conform	
		161= 160gr					

**SMT TACT SWITCH
3,9x2,9mm**


Part No.: **Q12138**

Customer:


DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	12.05.2019
APPD:	Schumi			FINISH	Jamy		Sheet No.	3 from 4	



Soldering Profile for Lead Soldering

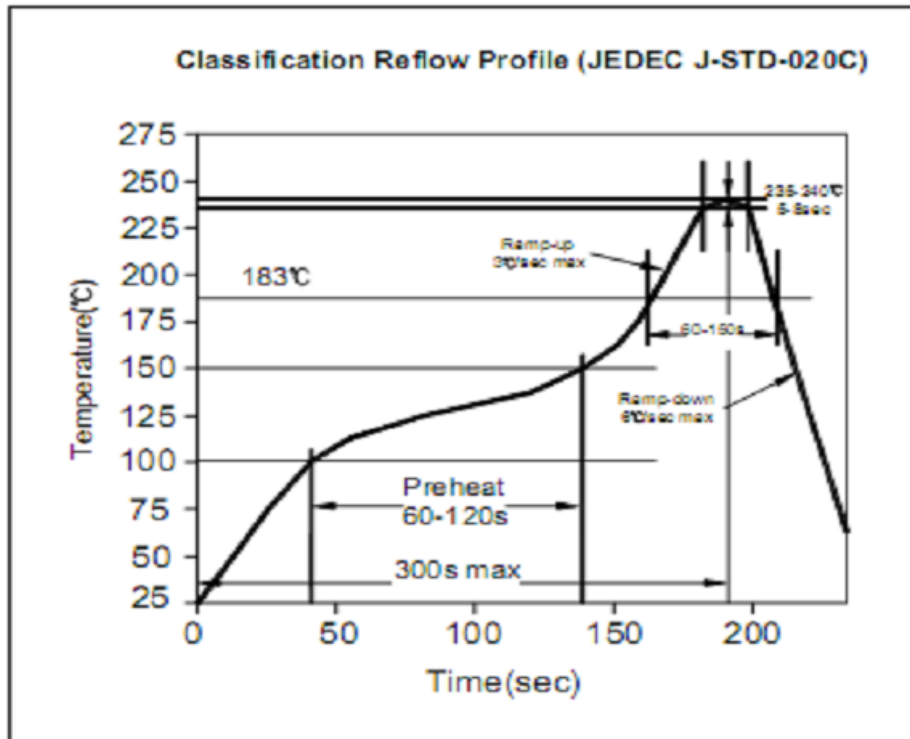

Soldering Profile for Lead Free Soldering

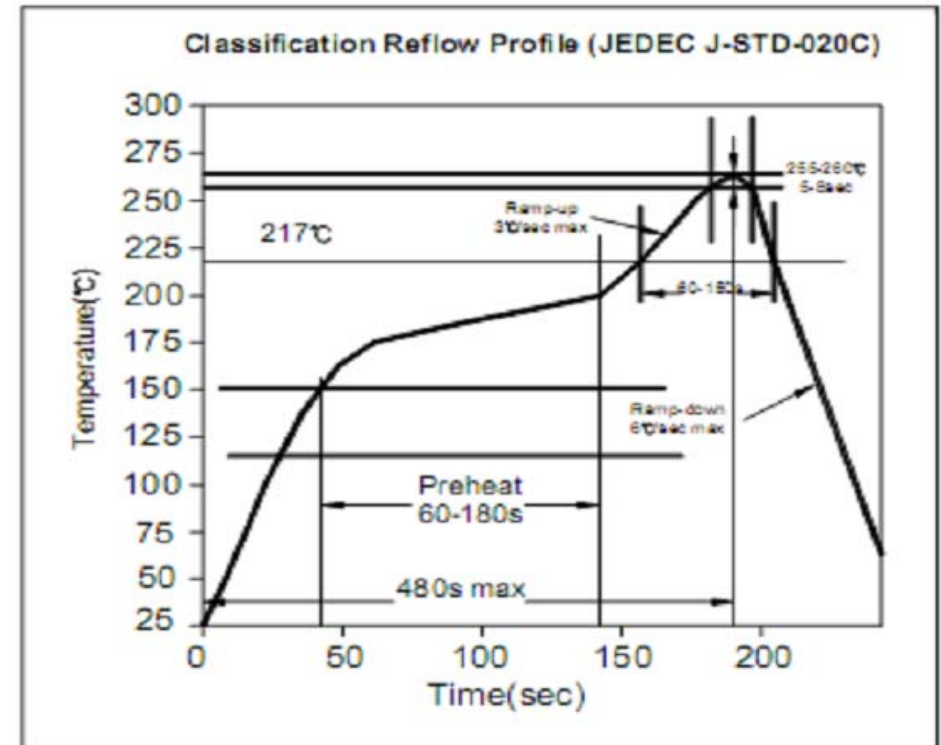

SMT TACT SWITCH
3,9x2,9mm

Part No.: **Q12138**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	12.05.2019
APPD:	Schumi			FINISH	Jamy		Sheet No.	4 from 4	