


EDCON-COMPONENTS



SPECIFICATION:

Current Rating:	1A / 125VAC / 0,5A/250VAC
Insulator Resistance:	100 Megaohm / min. 500VDC
Dielectric Withstanding:	AC 1000V / 1 Minute
Operating Temperature:	.-20°C to +50°C
Contact Material:	Copper, Alloy
Contact Resistance:	10mΩ mx.
Insulator Material:	Polyester, UL 94V-0
Standard:	P.B.T.
Contact Plating:	Tin, Gold or Selective Plated
Standard:	Gold Flash Overall
Operating Force:	100gr
Mechanical Lifetime:	100.00cycles
Electrical Lifetime:	10.000cycles

Drawing

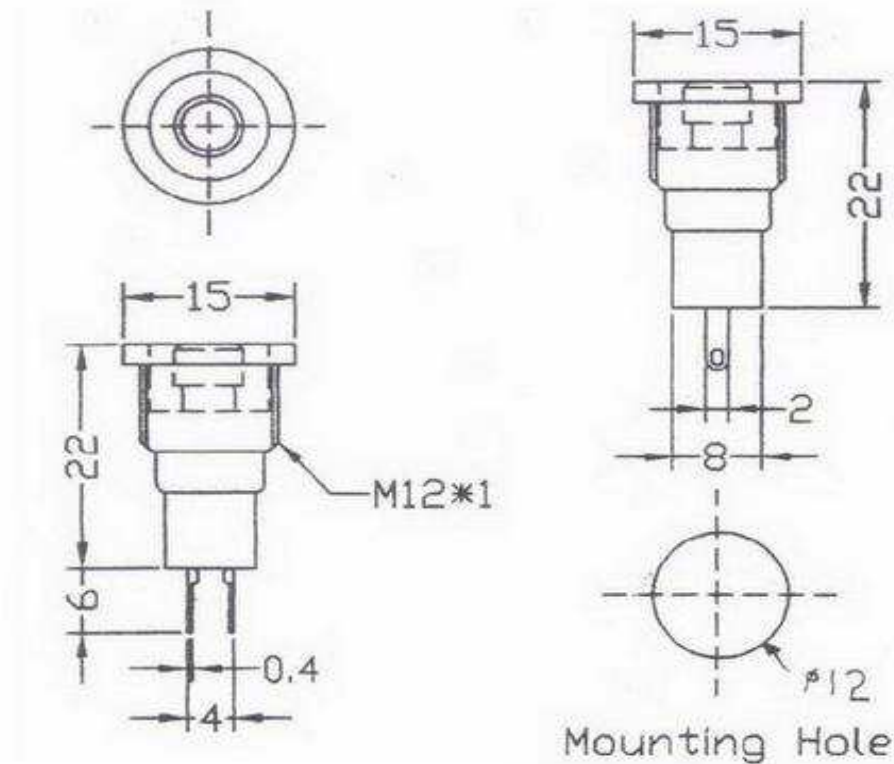

Frontpanel Switch 15/12mm

Part No.: **Q31024**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	22.12.2015
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 3	

www.edcon-components.com

email: info@edcon-components.com

EDCON-COMPONENTS



Ordering Informations

Serie	Knop Color	Switch function	Operating Force	Special function	Electrical life	Special function	ROHS	Packing		
Q31024	RD	A	101	N	103	X	R	BU		

BK= Black	A= Push ON	101 = 100gr	X= No Special function	103= 100000 cycles	X= No Special function	N= Non ROHS	BU= Bulk Ware
RD= Red	B= Push OFF					R= ROHS conform	
	C= ON- OFF						

**Frontpanel Switch
15/12mm**

Part No.: **Q31024**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	22.12.2015
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 3

Customer: