



DATA SHEET

Electro Magnetic Buzzer

Serie: Y11104

Electro Magnetic Buzzer

Serie No.: **Y11104**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	17.06.2018
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 5	



EDCON-COMPONENTS



Technical Specifications

Rated Voltage:	3,0	(Vp-p)
Operating Voltage:	2,0 ~ 5,0	(Vp-p)
Oscillation Frequency:	2700 ±300	Hz
Current Consumption (mA/max) rated V.	30	mA max.
Sound Pressure Level :@ 10cm rated V.	80	min. dB
Operating Temperature:	.-20~ +70	°C
Storage Temperature:	.-30~ +80	°C
Dimensions:L x W x H	9,6 x 9,6 x 5,0	mm
Termination Material / Plated	Brass/ Tin Plated	
Material:		
Housing:	PPS / Black	
	SMD	
Packing Unit:	600	PCS


Frequency Chart

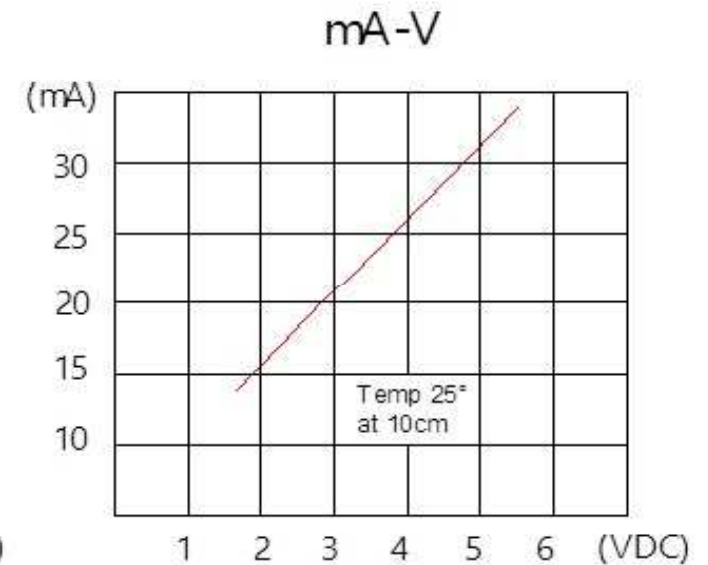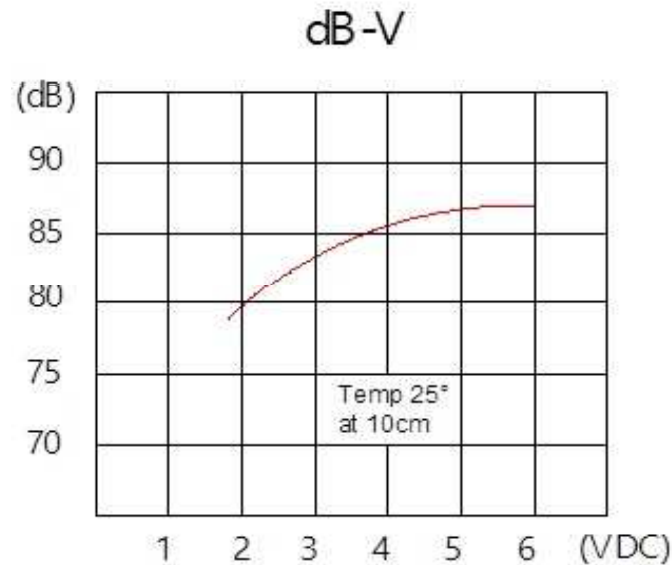

					Unspecified Tolerance (mm)					Electro Magnetic Buzzer Part No.: Y11104 Customer:
					X.	X.x	X.xx	X.xxx	X.xxxx	
					0,35	0,25	0,2	0,15		
DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	17.06.2018	Customer:
APPD:	Schumi			FINISH	Jamy		Sheet No.	2 from 5		



Technical Drawing

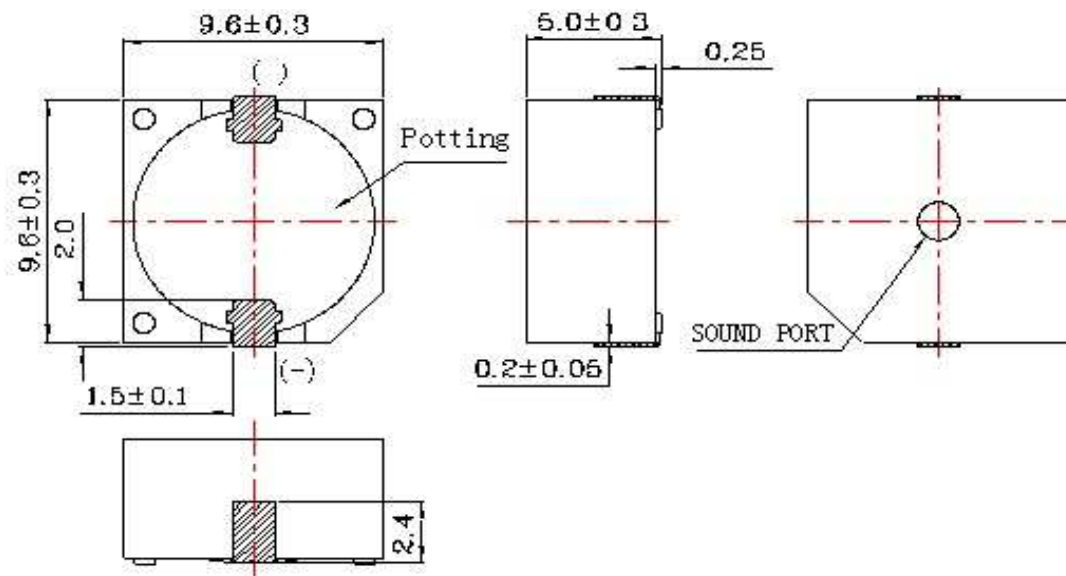
**Electro Magnetic
Buzzer**
Part No.: **Y11104**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	17.06.2018
APPD:	Schumi			FINISH	Jamy		Sheet No.	3 from 5	

EDCON-COMPONENTS



Ordering Informations

Serie		Special function	Special function	Special function	ROHS	Packing Code					
Y11104	-	N	N	N	R	TR					

0= no special function	0= no special function	0= no special function	R= ROHS Conform	BU= Bulk Ware
			N= NON ROHS Conform	TU= TUBE Packing
				TY= TRAY Packing
				TR= TAPE REEL Packing
				IV= Individual Packing

**Electro Magnetic
Buzzer**

Part No.: **Y11104**


DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	17.06.2018
APPD:	Schumi			FINISH	Jamy		Sheet No.		4 from 5

Customer:



Soldering Profile Curve

Classification Reflow Profile (JEDEC J-STD-020C)

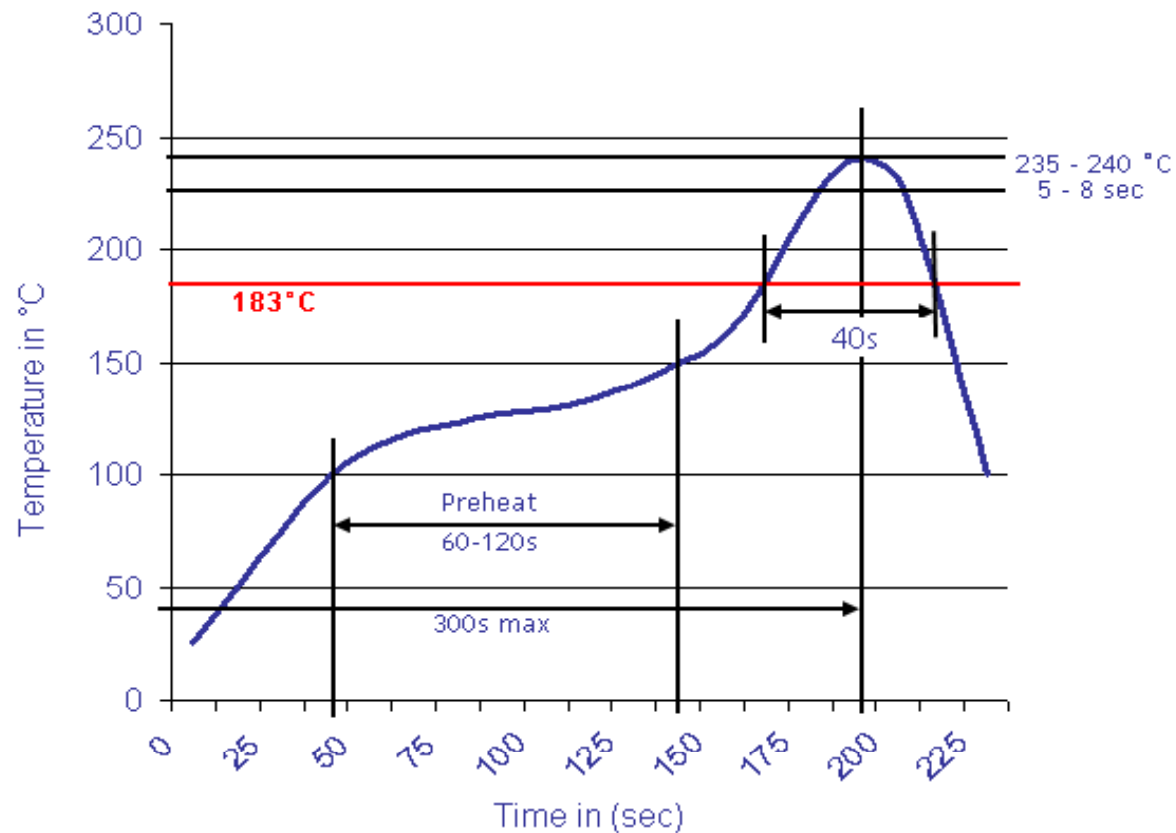
**Electro Magnetic
Buzzer**
Part No.: **Y11104**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	17.06.2018
APPD:	Schumi			FINISH	Jamy		Sheet No.	5 from 5	