



DATA SHEET

Electro Magnetic Buzzer

Serie: Y11195

Electro Magnetic Buzzer

Serie No.: Y11195

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	17.06.2018
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 5	

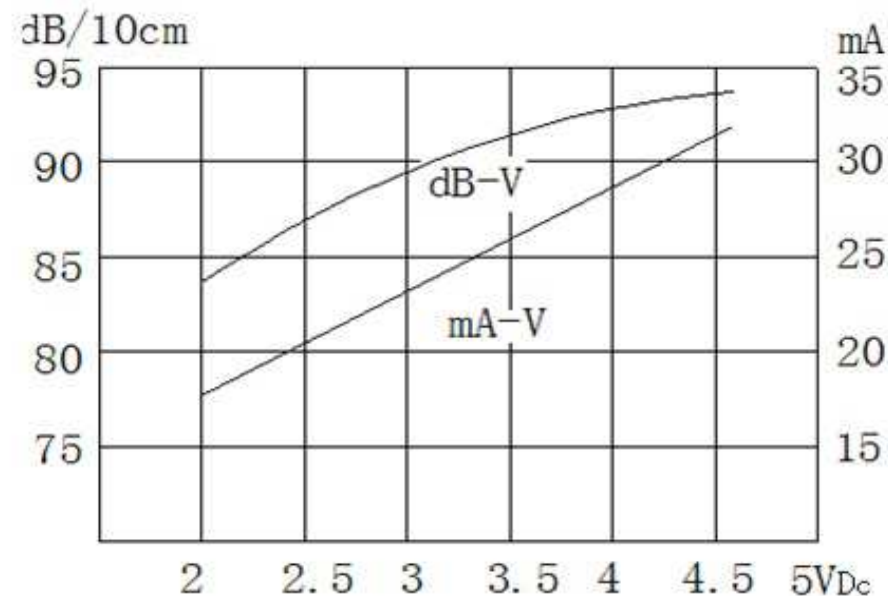
EDCON-COMPONENTS



Technical Specifications

Rated Voltage:	3,0	(Vp-p)
Operating Voltage:	2,0 ~ 5,0	(Vp-p)
Oscillation Frequency:	2300 ±300	Hz
Current Consumption (mA/max) rated V.	30	mA max.
Sound Pressure Level :@ 10cm rated V.	83	min. dB
Operating Temperature:	.-20~ +70	°C
Storage Temperature:	.-30~ +80	°C
Dimensions:L x W x H	12,0 x 7,5	mm
Termination Material / Plated	Brass/ Tin Plated	
Housing:	PPO / Black	
Termination:	THT	
Packing Unit: TRAY	100	PCS

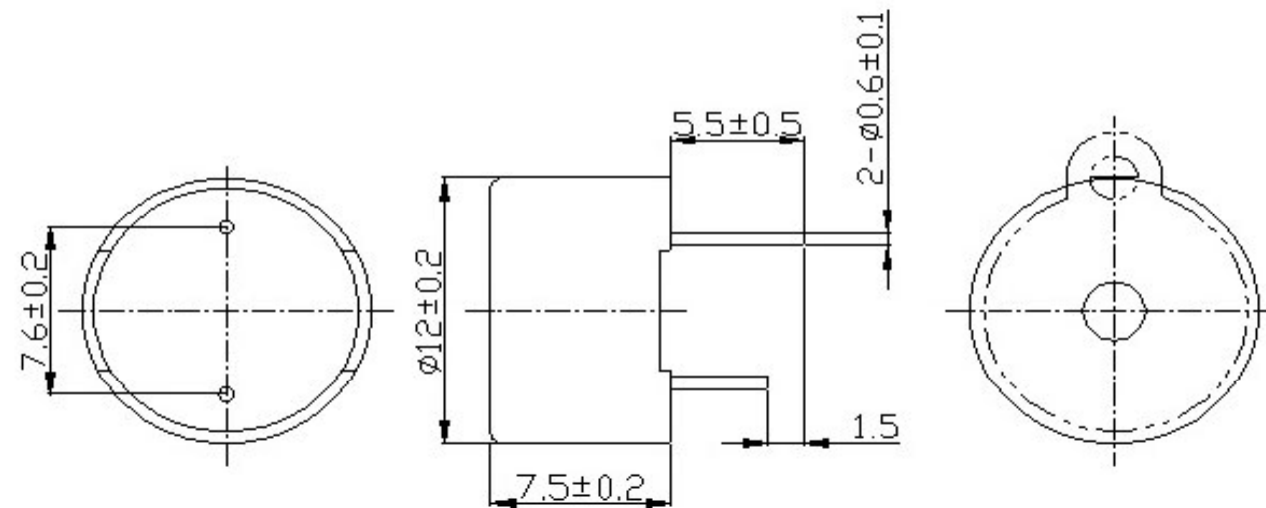
Frequency Chart (Distance= 10cm)



					Unspecified Tolerance (mm)					Electro Magnetic Buzzer	
					X.	X.x	X.xx	X.xxx	X.xxxx		
DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	17.06.2018	Part No.:	Y11195
APPD:	Schumi			FINISH	Jamy			Sheet No.	2 from 5	Customer:	



Technical Drawing


**Electro Magnetic
Buzzer**

Part No.: Y11195

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	17.06.2018
APPD:	Schumi			FINISH	Jamy		Sheet No.	3 from 5	

EDCON-COMPONENTS



Ordering Informations

Serie	Wire length	Wire Colour	Special function	ROHS	Packing Code					
Y11195	0100	A	N	R	TR					

0100= 100mm Wire Length	A= Red/Black Wire	0= no special function	R= ROHS Conform	BU= Bulk Ware
XXXX= Customer spezified	X= Customer Specified		N= NON ROHS Conform	TU= TUBE Packing
				TY= TRAY Packing
				TR= TAPE REEL Packing
				IV= Individual Packing

Electro Magnetic Buzzer

Part No.: Y11195

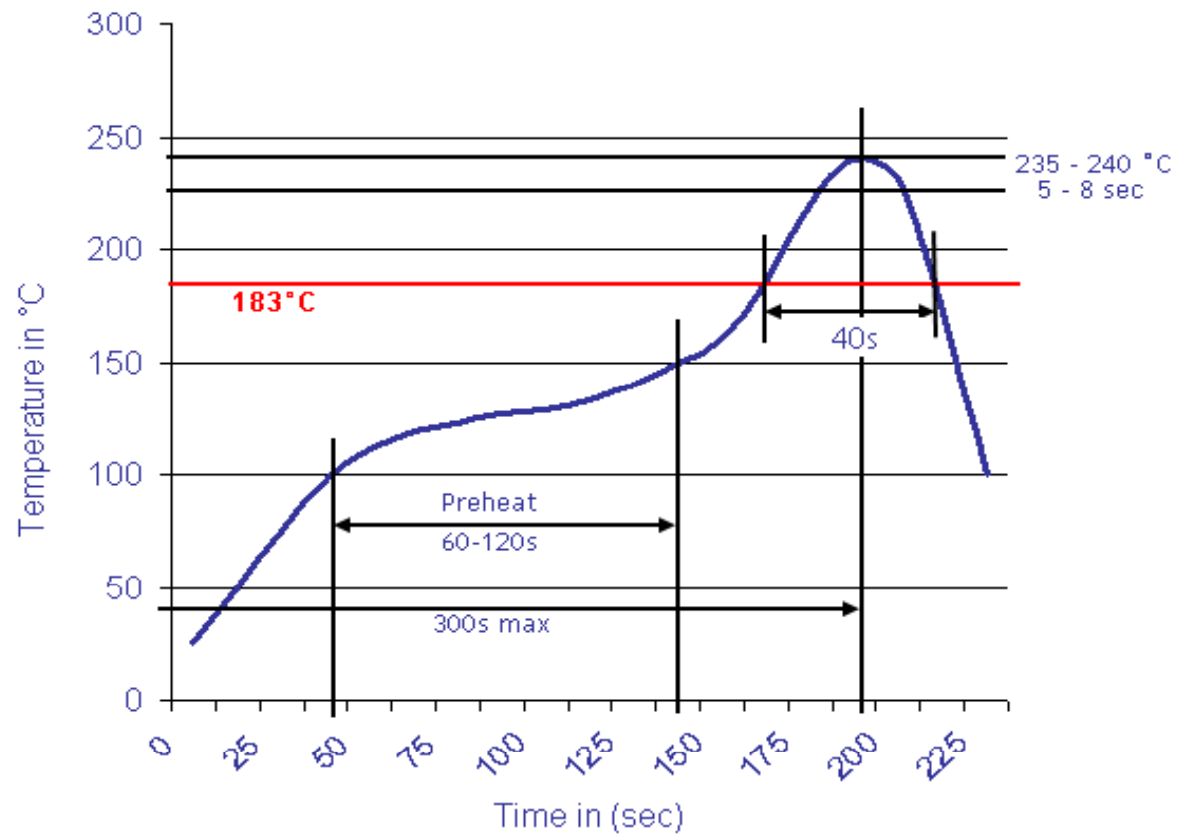
DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	17.06.2018
APPD:	Schumi			FINISH	Jamy		Sheet No.	4 from 5	

Customer:



Soldering Profile Curve

Classification Reflow Profile (JEDEC J-STD-020C)


**Electro Magnetic
Buzzer**

Part No.: Y11195

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	17.06.2018
APPD:	Schumi			FINISH	Jamy		Sheet No.	5 from 5	