



DATA SHEET

Mechanical Buzzer

Serie: Y11217

Mechanical Buzzer

Serie No.: Y11217

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	17.06.2018
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 4	


EDCON-COMPONENTS



Technical Specifications

Rated Voltage:	6,0	(Vp-p)
Operating Voltage:	5,0 ~ 7,0	(Vp-p)
Oscillation Frequency:	400 ±100	Hz
Current Consumption (mA/max) rated V.	25	mA max.
Sound Pressure Level :@ 10cm rated V.	80	min. dB
Operating Temperature:	.-20~ +60	°C
Storage Temperature:	.-30~ +70	°C
Dimensions:L x W x H	23,0x 16,6 x 14,7	mm
Termination Material / Plated	Brass/ Tin Plated	
Housing:	ABS / Black	
Termination:	THT	
Packing Unit: TRAY	100	PCS

Technical Dimensions (mm)

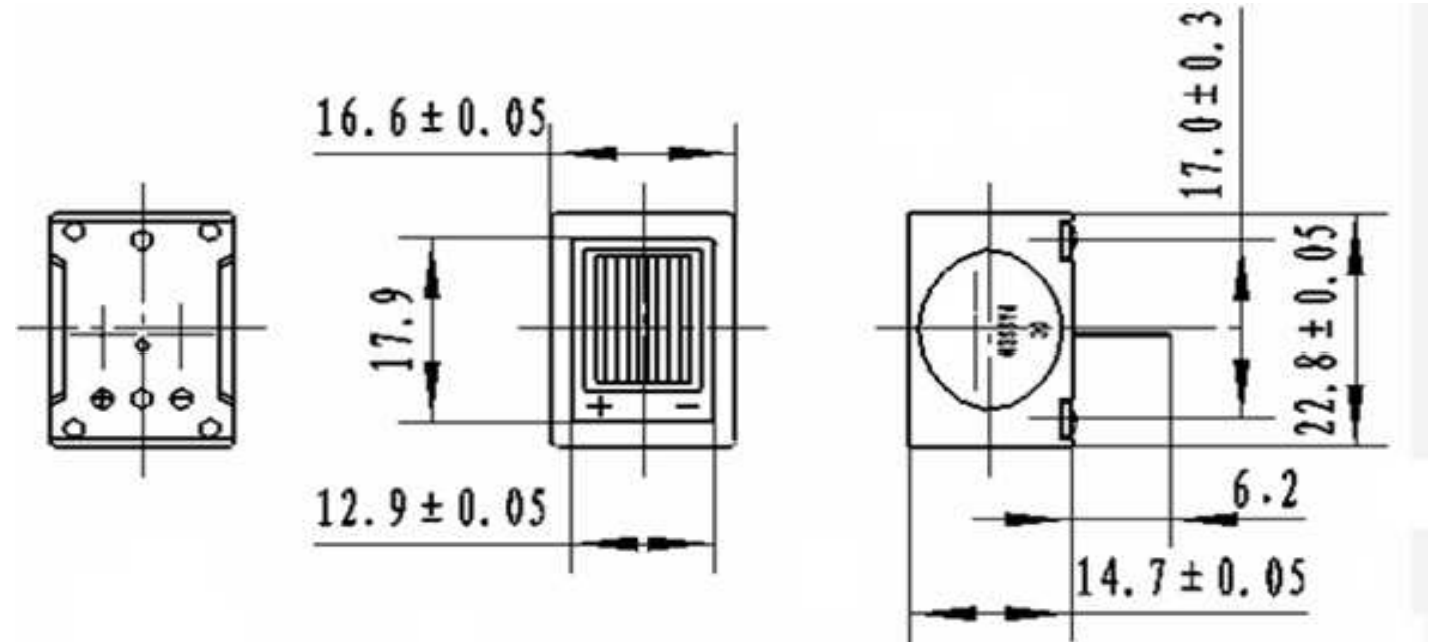

					Unspecified Tolerance (mm)					Mechanical Buzzer
					X.	X.x	X.xx	X.xxx	X.xxxx	
					0,35	0,25	0,2	0,15		
DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	17.06.2018	Part No.: Y11217
APPD:	Schumi			FINISH	Jamy			Sheet No.	2 from 4	Customer:

EDCON-COMPONENTS



Ordering Informations

Serie	Special function	Special function	Special function	ROHS	Packing Code					
-------	------------------	------------------	------------------	------	--------------	--	--	--	--	--

Y11217	-	N	N	N	R	TY				
--------	---	---	---	---	---	----	--	--	--	--

0= no special function	0= no special function	0= no special function	R= ROHS Conform	BU= Bulk Ware
			N= NON ROHS Conform	TU= TUBE Packing
				TY= TRAY Packing
				TR= TAPE REEL Packing
				IV= Individual Packing

Mechanical Buzzer

Part No.: Y11217


DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	17.06.2018
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 4

Customer:



Soldering Profile Curve

Classification Reflow Profile (JEDEC J-STD-020C)

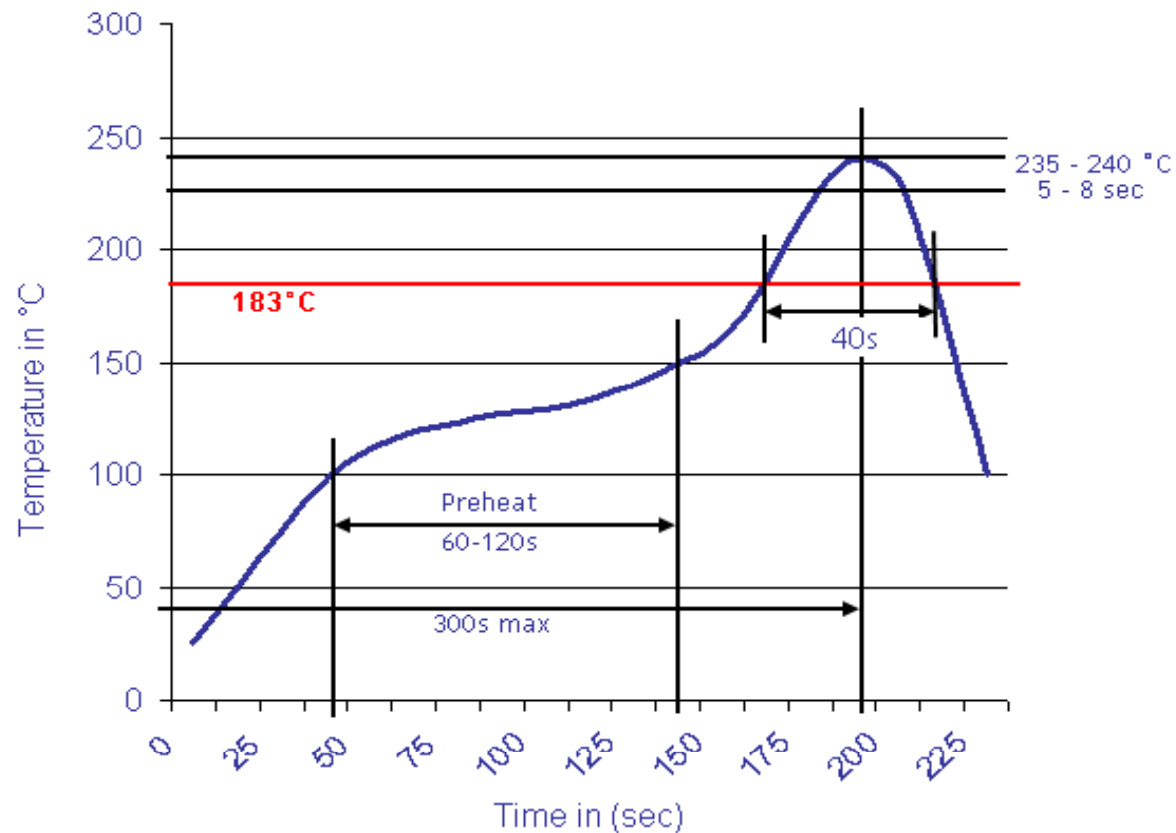**Mechanical Buzzer**Part No.: **Y11217**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	17.06.2018
APPD:	Schumi			FINISH	Jamy		Sheet No.	4 from 4	