





EDCON-COMPONENTS



SPECIFICATION:

Voltage Rating:	12VDC
Current Rating:	20mA
Mechanical Life:	100.000 cycles
Contact Resistance:	100m Ω max. (initial)
Insulation Resistance:	100M Ω min. 500VDC
Dielectric Strength:	250VAC/1min.
Operating Temperature:	-20°C ~ +70°C
Storage Temperature:	-30°C ~ +80°C
Operating Force:	160gr $\pm$ 50gr
Travel:	0,2mm $\pm$ 0,1mm

Drawing

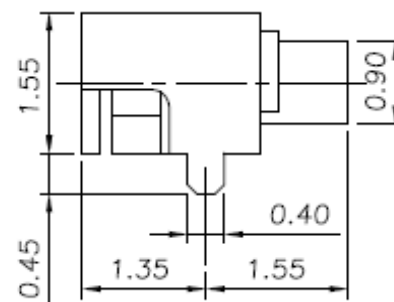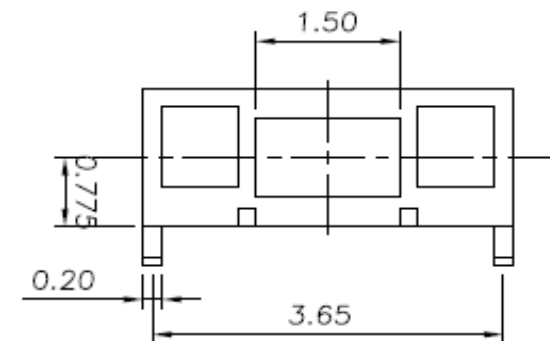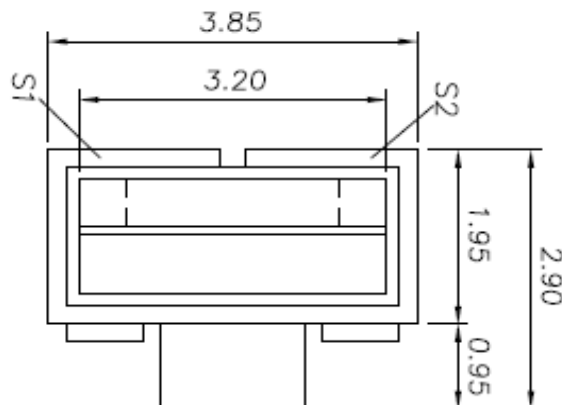

SMT Tact Switch Side Type

Part No.: **Q12153**


Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	01.07.2016
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 4	

www.edcon-components.com

email: info@edcon-components.com

Copyright by S.Tiede

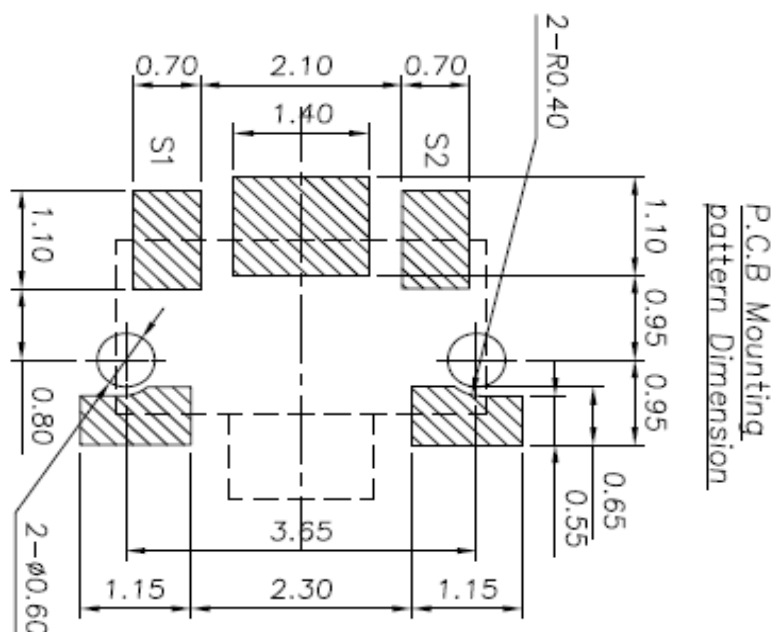

SMT Tact Switch Side Type	
Part No.:	Q12153
Customer:	

EDCON-COMPONENTS



Ordering Informations

Serie	Total length w. Body	Special function	Operating Force	Polarisation Peg	Electrical life	Special function	ROHS	Packing		
Q12153	029	N	161	N	104	N	R	TR		

026 = 2,6mm	N = No special function	161 = 160gr	N = without Peg	104 = 100.000 Cycles	N = No special function	N = Non ROHS	TR = Tape/Reel Packing
						R = ROHS conform	TU = Tube Packing
							BU = Bulk Ware

SMT Tact Switch Side Type

Part No.: **Q12153**


Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	01.07.2016
APPD:	Schumi			FINISH	Jamy		Sheet No.	3 from 4	



Soldering Profile Curve

Classification Reflow Profile (JEDEC J-STD-020C)

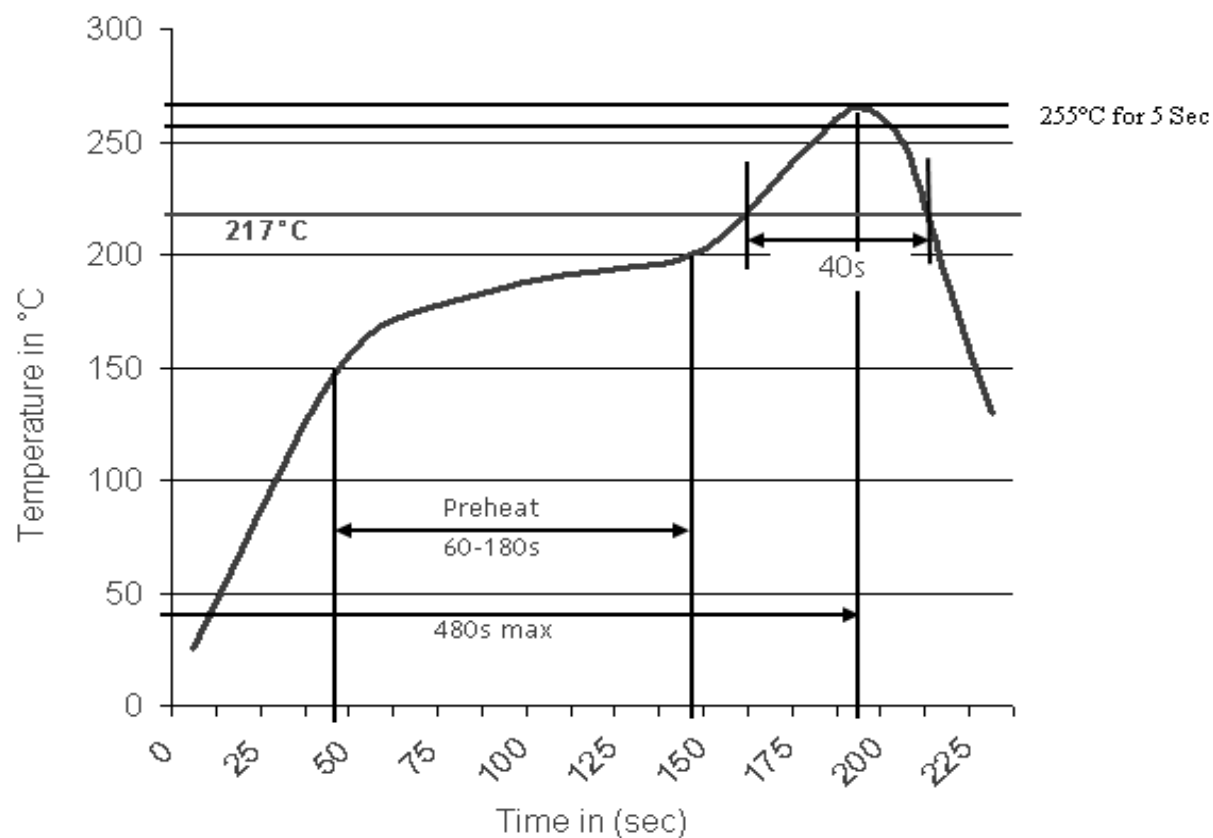
**SMT Tact Switch Side
Type**

 Part No.: **Q12153**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	01.07.2016
APPD:	Schumi			FINISH	Jamy		Sheet No.	4 from 4	