

EDCON-COMPONENTS



Technical Discription

1 Material:

| | |
|------------------|----------|
| Material Body: | C2700 |
| Gold Plated: | 16-20µm |
| Nickel: | 60-120µm |
| Material Needle: | C3604 |
| Gold Plated: | 4-8µm |
| Nickel: | 60-120µm |
| Spring: | SUS304 |
| Body: | PA46 |

2 Mechanical Properties

| | |
|-----------------|-----------|
| Pitch: | 3,5mm |
| Working height: | 4,8-5,1mm |
| Elastic: | 85 ± 15g |

Lifetime: more than 10000 times

3 Electrical Performance:

| | |
|-------------------------|--|
| 4 Isolation Resistance: | 500M Ohm min. |
| Withstanding Voltage: | 500VAC/DC |
| Max. Rated Voltage: | 36VDC dynamic range of work with impedance less than |



Contact Resistance: <30m Ohm

Rated current: 2,5A

5 Packing Specification: EIA 481

6 Max. Soldering Temperature: 260°C

Operating Temperature: -40°C to +85°C

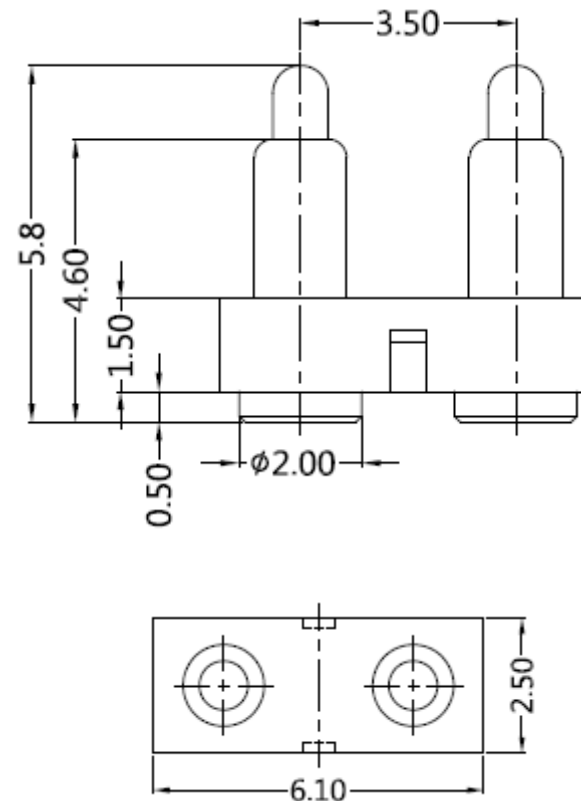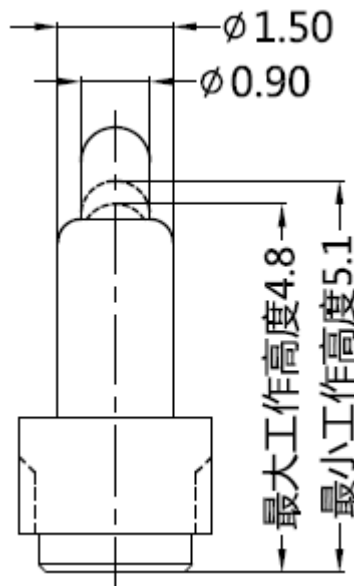


| | | | |
|--------------------------------|--|------------------|--|
| 2 POGO PIN with Plastic | | | |
| Part No.: | | TA23B3086 | |
| Customer: | | | |

| | | | | | | | | | | | |
|-------|--------|------|--------|--------|--------|-----------|-----------|--------|------------|--|--|
| | | | | | | Tolerance | | | | | |
| | | | | | | 0. | 0.0 | 0.00 | 0.000 | | |
| | | | | | | ± - | ± 0,30 | ± 0,15 | ± - | | |
| DRW: | Jason | CHKD | Wilson | MATL: | Wilson | TOLERANCE | Mason | DATE | 22.11.2017 | | |
| APPD: | Schumi | | | FINISH | Jamy | | Sheet No. | | 1 from 3 | | |

EDCON-COMPONENTS



PCB Layout (mm)

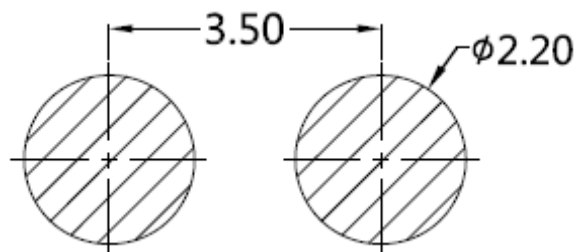

Ordering Informations

| Serie | Number of Position | Material Body | Material Needle | Contact Plat. Body | Contact Plat. Needle | Spezial Function | ROHS | Packing | | |
|-----------|--------------------|---------------|-----------------|--------------------|----------------------|------------------|------|---------|--|--|
| TA23B3086 | 02 | A | A | G0 | G0 | N | R | BU | | |

| | | | | | | | |
|-----------------|-------------------|-------------------|----------------------------|-------------------------|----------------|-----------------|------------------------|
| 02= Single Pole | A= Material C3604 | A= Material C3604 | G0= Gold Flash <16-20µinch | G0= Gold Flash 4-8µinch | N= No function | R= ROHS Conform | BU= Bulk-Ware Standard |
| | B= Material C2700 | B= Material C2700 | | | | | |
| | | | NO= Nickel 60-120µinch | NO= Nickel 60-120µinch | | | TR= Tape Reel |

2 POGO PIN with Plastic

Part No.: TA23B3086

| | | | | | | | | | | |
|-------|--------|------|--------|--------|--------|-----------|-----------|----------|------------|-----------|
| DRW: | Jason | CHKD | Wilson | MATL: | Wilson | TOLERANCE | Mason | DATE | 22.11.2017 | Customer: |
| APPD: | Schumi | | | FINISH | Jamy | | Sheet No. | 2 from 3 | | |



Soldering Profile Curve

Classification Reflow Profile (JEDEC J-STD-020C)



| | |
|--------------------------------|------------------|
| 2 POGO PIN with Plastic | |
| Part No.: | TA23B3086 |
| Customer: | |

| | | | | | | | | | |
|-------|--------|------|--------|--------|--------|-----------|-----------|----------|------------|
| DRW: | Jason | CHKD | Wilson | MATL: | Wilson | TOLERANCE | Mason | DATE | 22.11.2017 |
| APPD: | Schumi | | | FINISH | Jamy | | Sheet No. | 3 from 3 | |