


EDCON-COMPONENTS

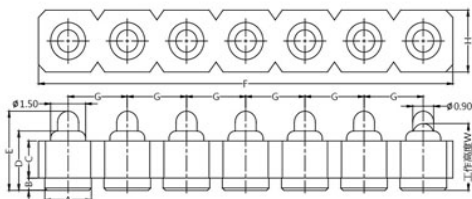

Technical Discription

Drawing

1 Material:

| | |
|------------------|----------|
| Material Body: | C2700 |
| Gold Plated: | 16-20µm |
| Nickel: | 60-120µm |
| Material Needle: | C3604 |
| Gold Plated: | 4-8µm |
| Nickel: | 60-120µm |
| Spring: | SUS304 |
| Body: | PA46 |

2 Mechanical Properties

| | |
|-----------------|-----------|
| Pitch: | 2,54mm |
| Working height: | 5,4~5,7mm |
| Elastic: | 100±20gr |

Lifetime: more than 10000 times

3 Electrical Performance:

4 Isolation Resistance:




| | |
|-----------------------|--|
| Withstanding Voltage: | 500M Ohm min. |
| Max. Rated Voltage: | 500VAC/DC |
| Max. Rated Voltage: | 36VDC dynamic range of work with impedance less than |

Contact Resistance: <30m Ohm

Rated current: 2,5A

5 Packing Specification:

| | |
|-----------------------------|-----------------|
| Max. Soldering Temperature: | 260°C |
| Operating Temperature: | -.40°C to +85°C |

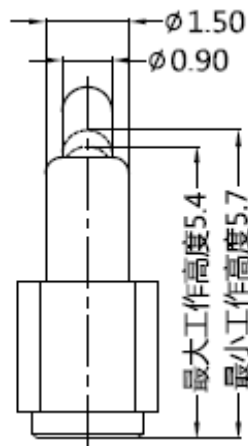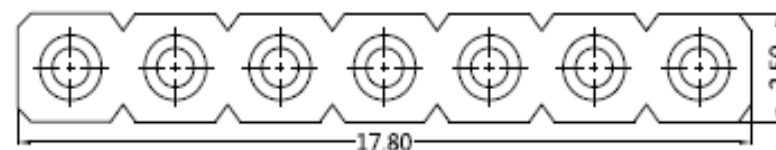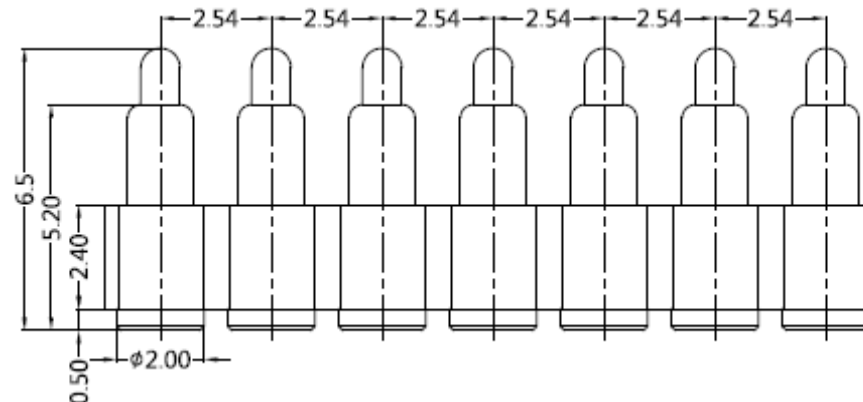

7 POGO PIN with Plastic


Part No.: **TA23B8013**

Customer:


| Tolerance | | | |
|-----------|--------|----------|------------|
| 0. | 0.0 | 0.00 | 0.000 |
| ± - | ± 0,30 | ± 0,15 | ± - |
| TOLERANCE | Mason | DATE | 06.12.2017 |
| Sheet No. | | 1 from 3 | |

| | | | | | |
|-------|--------|------|--------|--------|--------|
| DRW: | Jason | CHKD | Wilson | MATL: | Wilson |
| APPD: | Schumi | | | FINISH | Jamy |

EDCON-COMPONENTS

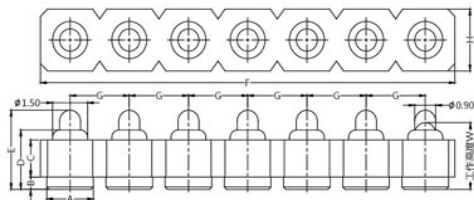

PCB Layout (mm)

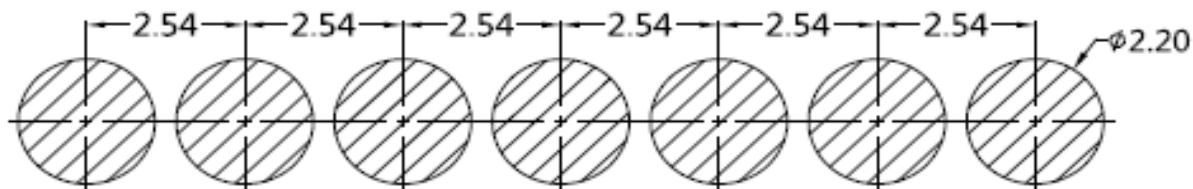

Ordering Informations


| Serie | Number of Position | Material Body | Material Needle | Contact Plat. Body | Contact Plat. Needle | Spezial Function | ROHS | Packing | | |
|------------------|--------------------|---------------|-----------------|--------------------|----------------------|------------------|----------|-----------|--|--|
| TA23B8013 | 07 | A | A | G0 | G0 | N | R | BU | | |

| | | | | | | | |
|---------------------|--------------------------|--------------------------|--------------------------------------|--------------------------------|-----------------------|------------------------|-------------------------------|
| 07= Position | A= Material C3604 | A= Material C3604 | G0= Gold Flash <16-20µinch | G0= Gold Flash 4-8µinch | N= No function | R= ROHS Conform | BU= Bulk-Ware Standard |
| | B= Material C2700 | B= Material C2700 | | | | | |
| | | | N0= Nickel 60-120µinch | N0= Nickel 60-120µinch | | | TR= Tape Reel |

7 POGO PIN with Plastic

Part No.: **TA23B8013**

| | | | | | | | | | | |
|-------|--------|------|--------|--------|--------|-----------|-----------|----------|------------|-----------|
| DRW: | Jason | CHKD | Wilson | MATL: | Wilson | TOLERANCE | Mason | DATE | 06.12.2017 | Customer: |
| APPD: | Schumi | | | FINISH | Jamy | | Sheet No. | 2 from 3 | | |

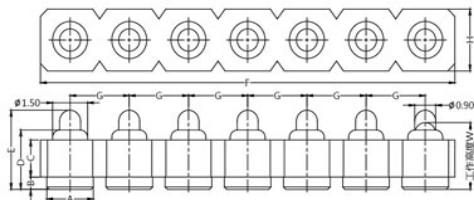

Soldering Profile Curve

Classification Reflow Profile (JEDEC J-STD-020C)



7 POGO PIN with Plastic

Part No.: **TA23B8013**

| | | | | | | | | | |
|-------|--------|------|--------|--------|--------|-----------|-----------|----------|------------|
| DRW: | Jason | CHKD | Wilson | MATL: | Wilson | TOLERANCE | Mason | DATE | 06.12.2017 |
| APPD: | Schumi | | | FINISH | Jamy | | Sheet No. | 3 from 3 | |

Customer: