



EDCON-COMPONENTS



Electric Data

Characteristic Impedance	50 Ohm
Frequency Range	0-11 GHz
Working Voltage	500 VRMS (max sea Level)
Dielectric Withstanding Voltage	1500 VRMS (min sea Level)
VSWR	Straight ≤ 1.30
Contact Resistance	Inner: 1.5 milliohms (max.) Outer: 0.2 milliohms (max.)
Insulation Resistance	5000 Megaohms (min)

Drawing (dimensions all into mm)

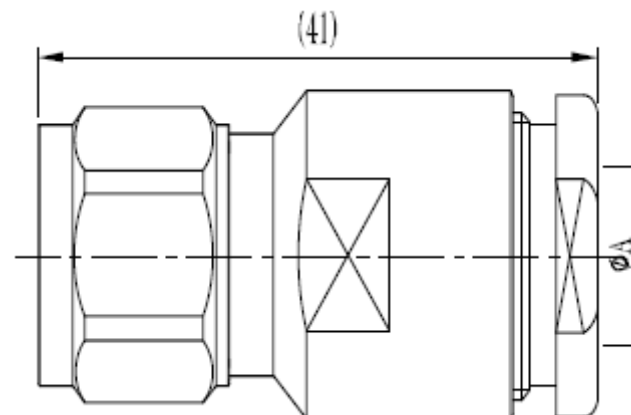

Mechanical Data

Durability Mating	500 Cycles (min)
-------------------	------------------

Material Data

Connector Parts	Materials	Plating Finish
Body	Brass	Nickel or Silver
Male Pin	Brass	Gold or Silver
Insulators	PTFE	N/A
Clamp Gaskets	Silicone Rubber or Synthetic Rubber	N/A

Description

A	A= 10.8
B	A= 11.5

Environmental Data

Temperature Range	-65 ~ +165°C
-------------------	--------------

**TNC Male Straight Clamp
Hexagonal Type**

Part No.: **T55T1103-**

Note: We can provide other materials and plating specifications according to customers requirements

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	19.12.2017
APPD:	Schumi			FINISH	Jamy		Sheet No.		1 from 2

Customer:

www.edcon-components.com

email: info@edcon-components.com

EDCON-COMPONENTS



Ordering Informations

Serie	Impedance	Body Materials	Body Plating	Contact Pin Materials	Contact Pin Plating	Special function	ROHS	Packing			
T55T1103-	50	BR	NI	BR	GO	A	R	BU			

50= 50Ω	BR= Brass Material	NI= Nickel Plated	BR= Brass Material	GO= Gold Plated	A= look Description A	R= ROHS Conform	BU= Bulk Ware
		SI= Silver Plated		SI= Silver Plated		N= NON ROHS Conform	IV= Individual Package
					B= look Description B		

A= 10/50S (SYV-50-7-1, RG-8/U, 165/U, 213/U, 7D-FB, LMR400)
B= 11/50D (SYV-50-7-2, RG-9/U, 214/U, 225/U)

TNC Male Straight Clamp Hexagonal Type	
Part No.:	T55T1103-
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	19.12.2017
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 2