


EDCON-COMPONENTS



Technical Discription


Pitch	5,00mm
No of Conductor	2~15Pin
Conductor Diameter	0,50mm
Total Length from / to	10 ~ 3000mm
Flammability Rating:	UL94V-0
Current Rating:	3,0A
Voltage Rating:	1000V/Min.
Insulation Film:	Kapton or Nomex or Polyester
Temperatur Rating:	Kapton = 150°C Nomex = 125°C Polyester = 105°C

Drawing

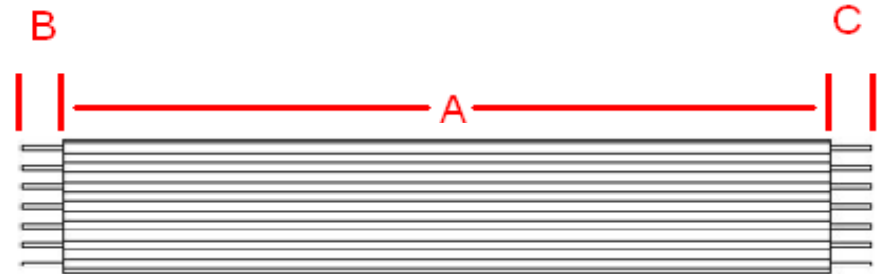

Both ends strip

A= Length tolerance Dimension	Code A
A= >12-200mm +/- 2mm	0012-0200
A= 200-400mm +/- 2mm	0200-0400
A= >400mm +/- 2mm	0400-3000

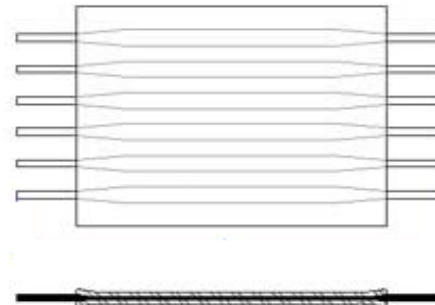

**Round end Jumper Flat
Cable Pitch 5,00mm**

Part No.:

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	21.07.2021
APPD:	Schumi			FINISH	Jamy		Sheet No.		1 from 2

www.edcon-components.com

email: info@edcon-components.com

EDCON-COMPONENTS



Ordering Informations

Terminal

Serie	No of Conductor	Insulation Film	Length B	Length C	Insulation Length A	ROHS	Packing
-------	-----------------	-----------------	----------	----------	---------------------	------	---------

T29029	xx	A	Bx	Cx	Axxxx	R	BG
--------	----	---	----	----	-------	---	----

10= 10Pos. You can selection 2~15Pos.		B1= 3,0mm +/- 0,5mm	C1= 3,0mm +/- 0,5mm	Axxxx= +/- 0010 to 3000mm	R= ROHS conform	BG101= Polybag w. 100PCS
		B2= 3,5mm +/- 0,5mm	C2= 3,5mm +/- 0,5mm		N= NON ROHS conform	
		B3= 4,0mm +/- 0,5mm	C3= 4,0mm +/- 0,5mm			
	A= Aramid Paper	B4= 5,0mm +/- 1,0mm	C4= 5,0mm +/- 1,0mm			

Round end Jumper Flat Cable Pitch 5,00mm	
Part No.:	T29029
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	21.07.2021
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 2