





Technical Specification

Insulator:	Black glass filled polyester PPS-GF-30-FR
Flammability:	UL 94V-0
Sleeve:	Brass CuZn 36Pb3 (36000)
Contact Clip (6finger):	Beryllium Copper (C17200)
Mating Pin: (Ø)	0,70 to 0,9mm Square 0,64
Forces:	polished steel gauge(Ø)0,76mm
.-Insertion:	1,2N typ.
.-Withdrawel:	0,6N typ.
Mechanical Life:	min 500 cycles
Rated Current:	3A
Contact Resistance:	max. 10m Ohm
Dielectric Strength:	min 1000V rms
Mating with pin:	Ø 0,66mm
Maximal position of deliver:	4
Maximal position of deliver:	

Technical Drawing

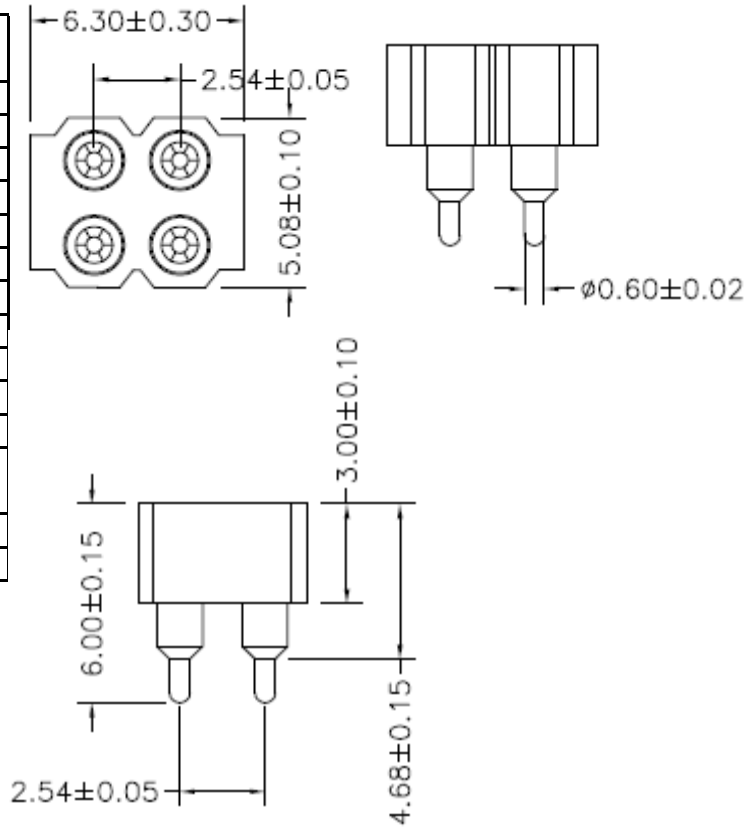

PCB Layout



Ordering Information

Serie	No. of Pos.	Solder Pin Plating	Inner Clip Plating	ROHS	Packing
T40125	04	A	3	R	B1

04	A= Tin 150µ" (Standard) B= Tin 200µ" C= GF D= Gold 2µ" E= Gold 3µ" F= Gold 10µ" G= Gold 15µ" H= Special	1= Tin 150µ" 2= Tin 200µ" 3= GF (Standard) 4= Gold 2µ" 5= Gold 3µ" 6= Gold 10µ" 7= Gold 15µ" 8= Special	R= ROHS conform N= NON ROHS conform	B1= Bulk 100PCS
-----------	--	--	--	------------------------

**Machined Contact Pitch
2,54mm**

Part No.: **T40125**

Customer:

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	21.07.2017
APPD:	Join			FINISH	Shieh	Sheet	1 from 1